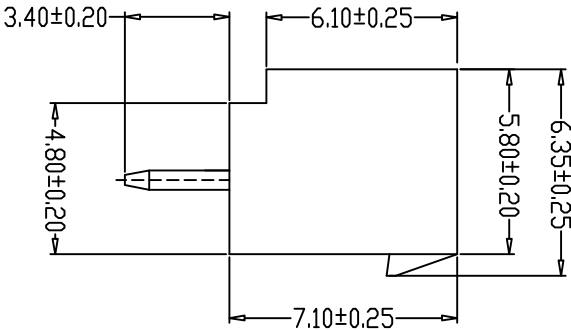
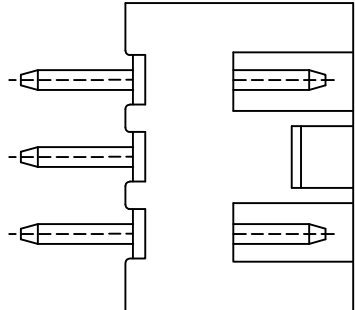
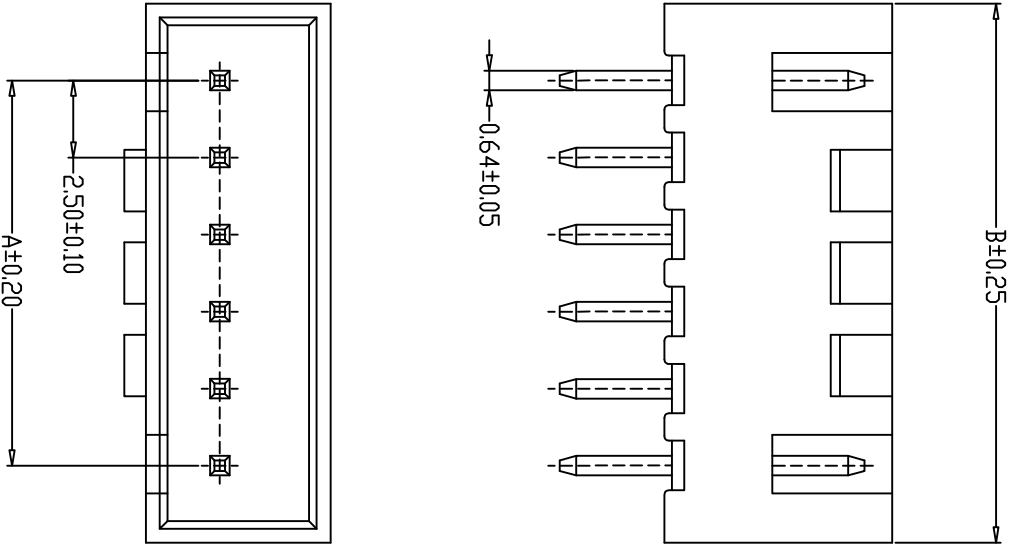


PCB LAYOUT

- SPECIFICATIONS
- Current Rating: 3A AC, DC
 - Voltage Rating: 250V AC, DC
 - Temperature Range: -25°C~+85°C
 - Contact Resistance: 20mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 1000V AC/minute
 - Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A2504-02A	2.50	7.50
A2504-03A	5.00	10.00
A2504-04A	7.50	12.50
A2504-05A	10.00	15.00
A2504-06A	12.50	17.50
A2504-07A	15.00	20.00
A2504-08A	17.50	22.50
A2504-09A	20.00	25.00
A2504-10A	22.50	27.50
A2504-11A	25.00	30.00
A2504-12A	27.50	32.50
A2504-20A	47.50	52.50

单位 UNIT	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd	
比例 SCALE		版本: A0	产品名称 Product name
X. ±0.5	X. ±	审核: 1/1	HA直针 WAFER DIP TYPE
.X ±0.30	.X ±	CHECKED BY	产品料号 Product No
.XX ±0.20	.XX ±	制图: 封文辉	TH-A2504-NA
.XXX ±0.005, XXX ±	.XXX ±	日期: 2022.9.2	客户料号 Client No
		DRAWN BY	