
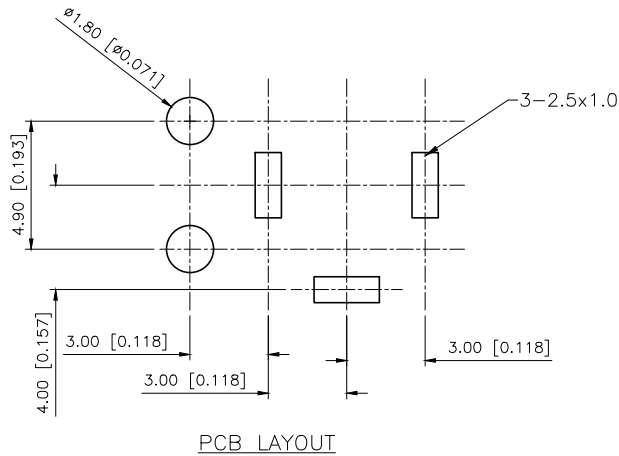
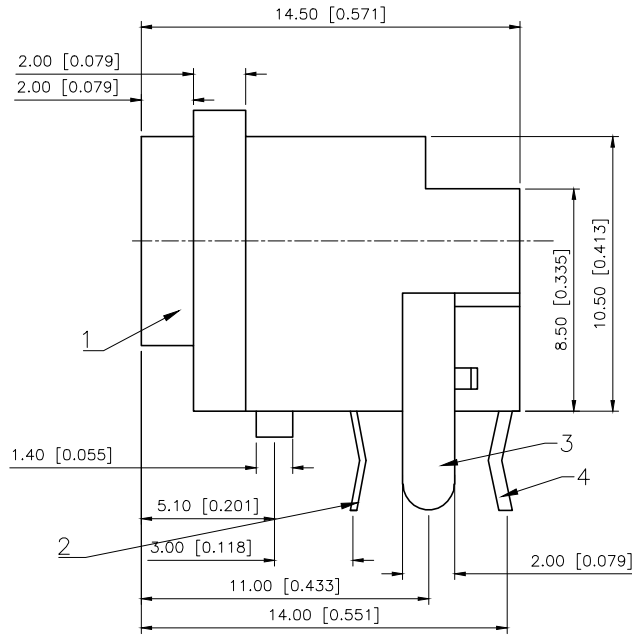


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

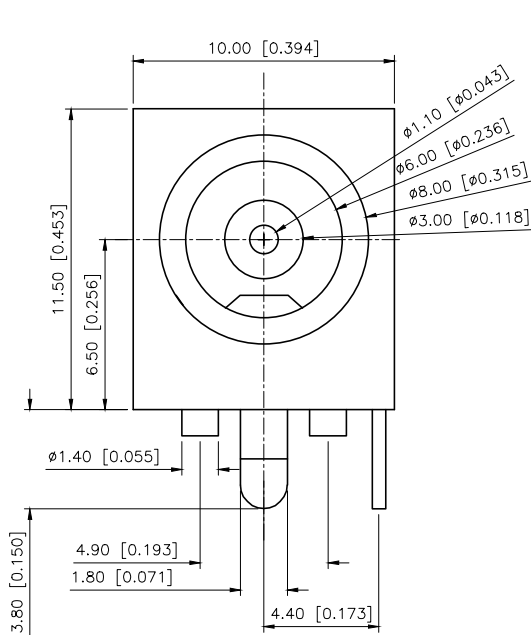

SPECIFICATION

规格

- 1.Rating:DC 30V,2A
额定值:直流30V, 2A
- 2.Contact resistance:≤0.02Ω
接触电阻:≤0.02Ω
- 3.Insulation resistance:100mΩ
绝缘电阻:100mΩ
- 4.Withstand voltage:250V/min
耐压: 250V/min
- 5.Insertion and extraction force:3-15N
插拔力: 3-15N
- 6.life: 5, 000 cycles
寿命: 5, 000次循环

SCHEMATIC	
Model	DC-038A

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DC POWER JACK
CHECKED		UNIT:	mm/in	PART NO.:	DC-038A
APPROVED		SIZE:	A4	DWG NO.:	