



MTA 156

TE Internal #: 4-640429-0

Connector Assembly, Receptacle, Wire-to-Board, 10 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, MTA 156, Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **10**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	10
Number of Power Positions	10
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Cable Exit Angle	90°
------------------	-----



Connector Profile	Standard
Contact Features	
Contact Layout	Inline
Contact Underplating Material Thickness	30 µm[.762 µin]
Wire Contact Termination Area Plating Thickness	2.03 – 5.08 µm[80 – 200 µin]
Contact Mating Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	With
Contact Type	Receptacle
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 µm[80 µin]
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Strain Relief	With
Mating Retention	With
Mating Alignment	Without
Contact Retention Type Within Housing	Locking Lance
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Ramp
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Wire & Cable IDC Installation Type	Closed End
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	White
Housing Material	Nylon
Dimensions	
Connector Height	9.02 mm[.355 in]



Product Length	39.62 mm[1.872 in]
Compatible Insulation Diameter Range	2.41 mm[.095 in]
Wire Size	.2 mm ²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	250
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


TE Part # 58247-1 MTA 156 CRIMP HEAD REPAIR DISCRETE	TE Part # 58074-1 MTA 50/100/156 MANUAL TOOL FRAME	TE Part # 59804-1 MAINTENANCE TOOL	TE Part # 1-640384-0 10P MTA156 HDR ASSY STR RND SN
TE Part # 1-640385-0 10P MTA156 HDR ASSY SQ R/A	TE Part # 1-643067-0 10P MTA156 MOLDED COVER	TE Part # 1-640388-0 10P MTA156 HDR ASSY RN STR F/L	TE Part # 1-640383-0 10P MTA156 HDR ASSY STR SQ SN
TE Part # 1-640445-0 10P MTA156 HDR ASSY FL/STR SN	TE Part # 4-644615-0 10P MTA156 POL LOCK ASSY LF	TE Part # 1-643071-0 10P MTA156 FD-THRU COVER	TE Part # 3-647123-0 10P MTA156 SHRD HDR ASSY SQ SN
TE Part # 1-644753-0 10P MTA156 HDR ASSY RN STR F/L	TE Part # 1-640551-0 10P MTA156 COVER	TE Part # 1-640389-0 10P MTA156 HDR ASSY SQ R/A F/L	TE Part # 1-644752-0 10P MTA156 HDR ASSY SQ STR F/L




TE Part # 58247-3
MTA 156 CRIMP HEAD PRODUCTION
RBBN CABLE



TE Part # 1-640643-0
10P MTA156 COVER F/T

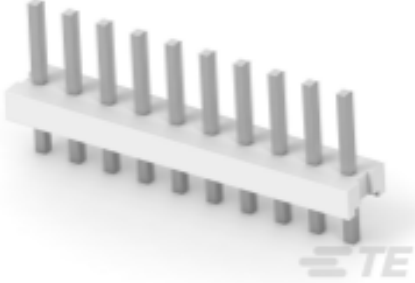

TE Part # 1-644749-0
10P MTA156 HDR ASSY STR SQ SN

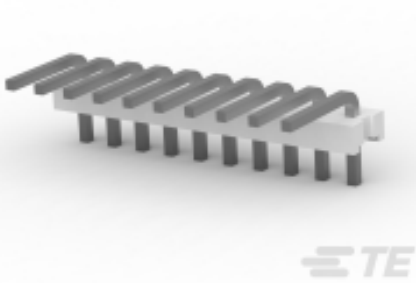

TE Part # 1-644751-0
10P MTA156 HDR ASSY R/A


Also in the Series | MTA 156



Connector Caps & Covers(89)




Connector Contacts(4)

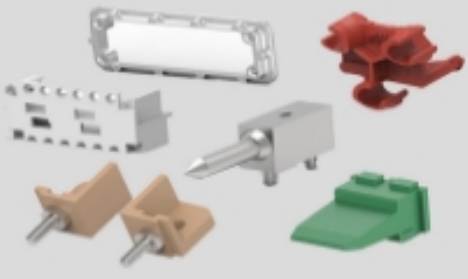

Connector Hardware(2)



Insertion & Extraction Tools(1)

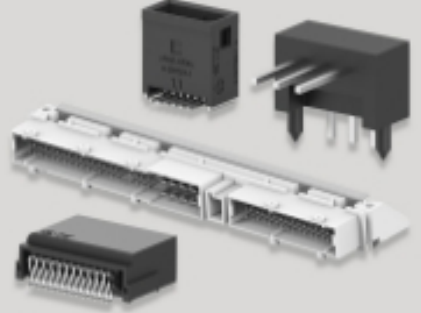

PCB Headers & Receptacles(317)



Rectangular Power Connectors(691)



Standard Rectangular Connectors(336)

Customers Also Bought



TE Part #1-499252-2
030 STRAIN RELIEF A-L RCPT



TE Part #1879378-7
TLR 2512 2.0W R0005 1% 50PPM 2K RL




TE Part #3-640429-6
06P MTA156 CONN ASSY 24AWG
WHT



TE Part #1658621-6
26 NOVO MIL/CTR 15DP, LEAD FREE




TE Part #1-640388-0
10P MTA156 HDR ASSY RN STR F/L

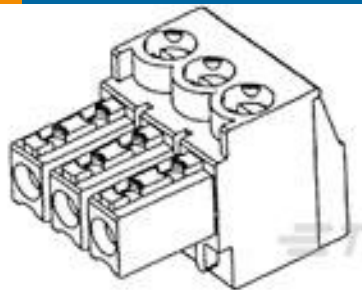


TE Part #284506-6
6 POS TERMI-BLOK PLUG STACK 3,




TE Part #5-146252-5
10 MODII HDR DRST B/A .100 LF

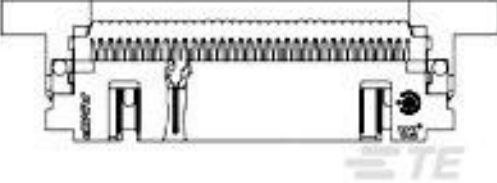

TE Part #5111448-8
034 UNIV I/O 30DP SLOT

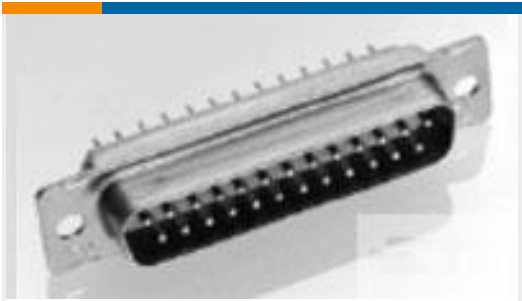

TE Part #1218125-4
[37 POS,ASSY,PLUG,LOW PROF,109](#)

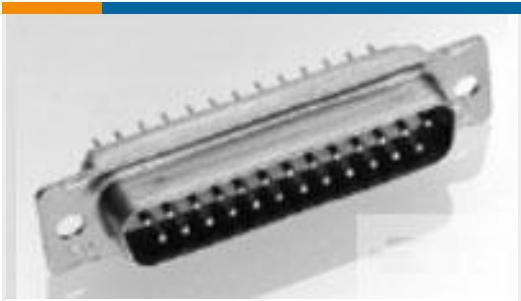

TE Part #443976-4
[AMPLIMITE,ASY,RCPT,POSTD,109,4](#)

Documents

Product Drawings

[10P MTA156 CONN ASSY 24AWG WHT](#)

English

CAD Files

[3D PDF](#)

English

Customer View Model

[ENG_CVM_4-640429-0_S.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_4-640429-0_S.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_4-640429-0_S.3d_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_4-640429-0_N.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-640429-0_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-640429-0_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English

4-640429-0

Connector Assembly, Receptacle, Wire-to-Board, 10 Position, 3.96 mm [.156 in]
Centerline, Wire & Cable, MTA 156, Rectangular Power Connectors

