


MULTILAYER CERAMIC CHIP CAPACITORS

Commercial Grade, Soft Termination

C series

C1005	[0402 inch]
C1608	[0603 inch]
C2012	[0805 inch]
C3216	[1206 inch]
C3225	[1210 inch]
C4520	[1808 inch]
C4532	[1812 inch]
C5750	[2220 inch]
C7563	[3025 inch]

* Dimensions code: JIS[EIA]

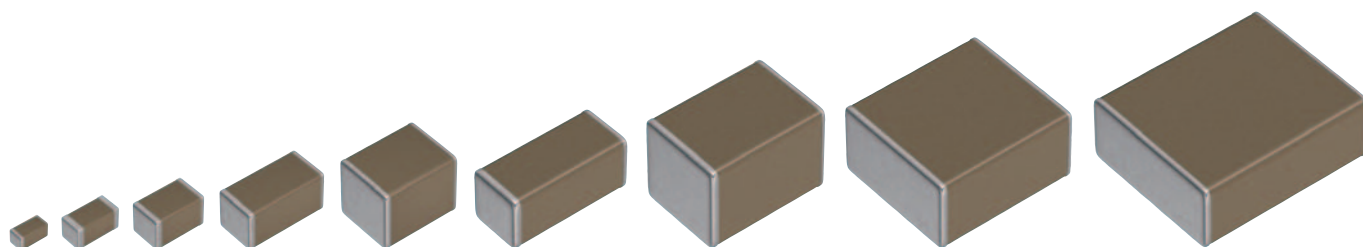

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this product.



REMINDERS

1. The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- | | |
|---|--|
| (1) Aerospace/aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders.

Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label.

Contact your local TDK Sales representative for more information.

(Example)

Catalog issued date	Catalog number	Item description (on delivery label)
Prior to December 2012	C1608C0G1E103J(080AA)	C1608C0G1E103JT000N
January 2013 and later	C1608C0G1E103J080AA	C1608C0G1E103JT000N

C series

Soft termination



Type: C1005 [0402 inch], C1608 [0603 inch], C2012 [0805 inch],
C3216 [1206 inch], C3225 [1210 inch], C4520 [1808 inch],
C4532 [1812 inch], C5750 [2220 inch], C7563 [3025 inch]

SERIES OVERVIEW

TDK multilayer ceramic chip capacitor_Soft termination_General grade_C series is a product which conductive resin layers are included in terminations. Soft termination series has higher mechanical endurance by the flexible resin layers which absorbs thermal and mechanical stress.


FEATURES

- Higher mechanical endurance is realized by flexible resin layers.
- X8R type which maximum temperature is up to 150°C is applicable.
- C0G temperature characteristic which has excellent stable temperature and DC-bias characteristics is applicable.

APPLICATIONS

- Fail-safe design in battery line.
- Prevention of ceramic body cracks by board bending.
- Prevention of solder cracks by thermal shock.
- The set having a high probability of fall.


SHAPE & DIMENSIONS



L	Body length
W	Body width
T	Body height
B	Terminal width
G	Terminal spacing


ELECTRODE STRUCTURE DRAWING

Standard termination



Termination consists of 3 layers by Cu, Ni and Sn.

Soft termination

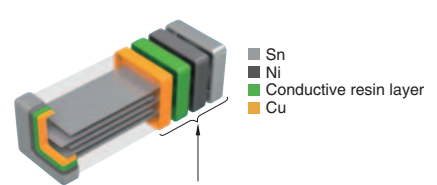

Termination consists of 4 layers including conductive resin layer.

Dimensions in mm

Type	L	W	T	B	G
C1005	1.00+0.15,-0.05	0.50+0.10,-0.05	0.50+0.10,-0.05	0.10 min.	0.30 min.
C1608	1.60+0.20,-0.10	0.80+0.15,-0.10	0.80+0.15,-0.10	0.20 min.	0.30 min.
C2012	2.00+0.45,-0.20	1.25+0.25,-0.20	1.25+0.25,-0.20	0.20 min.	0.50 min.
C3216	3.20+0.40,-0.20	1.60+0.30,-0.20	1.60+0.30,-0.20	0.20 min.	1.00 min.
C3225	3.20+0.50,-0.40	2.50±0.30	2.50±0.30	0.20 min.	—
C4520	4.50+0.50,-0.40	2.00+0.30,-0.20	1.30±0.20	0.20 min.	—
C4532	4.50+0.50,-0.40	3.20±0.40	2.50±0.30	0.20 min.	—
C5750	5.70+0.50,-0.40	5.00±0.40	2.50±0.30	0.20 min.	—
C7563	7.50±0.50	6.30±0.50	3.00 max.	0.30 min.	—

* Dimensional tolerances are typical values.

MULTILAYER CERAMIC CHIP CAPACITORS



CATALOG NUMBER CONSTRUCTION

C	7563	X7S	1C	107	M	280	L	E
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)

(1) Series

(2) Dimensions L x W (mm)

Code	EIA	Length	Width	Terminal width
1005	CC0402	1.00	0.50	0.10
1608	CC0603	1.60	0.80	0.20
2012	CC0805	2.00	1.25	0.20
3216	CC1206	3.20	1.60	0.20
3225	CC1210	3.20	2.50	0.20
4520	CC1808	4.50	2.00	0.20
4532	CC1812	4.50	3.20	0.20
5750	CC2220	5.70	5.00	0.20
7563	CC3025	7.50	6.30	0.30

(3) Temperature characteristics

Temperature characteristics	Temperature coefficient or capacitance change	Temperature range
C0G	0±30 ppm/°C	-55 to +125°C
X5R	±15%	-55 to +85°C
X7R	±15%	-55 to +125°C
X7S	±22%	-55 to +125°C
X7T	+22,-33%	-55 to +125°C
X8R	±15%	-55 to +150°C

(4) Rated voltage (DC)

Code	Voltage (DC)
0J	6.3V
1A	10V
1C	16V
1E	25V
1V	35V
1H	50V
2A	100V
2E	250V
2W	450V
2J	630V
3A	1000V
3D	2000V
3F	3000V

(5) Nominal capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

(Example) 0R5 = 0.5pF
 101 = 100pF
 225 = 2,200,000pF = 2.2μF

(6) Capacitance tolerance

Code	Tolerance
J	±5%
K	±10%
M	±20%

(7) Thickness

Code	Thickness
050	0.50 mm
060	0.60 mm
080	0.80 mm
085	0.85 mm
115	1.15 mm
125	1.25 mm
130	1.30 mm
160	1.60 mm
200	2.00 mm
230	2.30 mm
250	2.50 mm
280	2.80 mm

(8) Packaging style

Code	Style
A	178mm reel, 4mm pitch
B	178mm reel, 2mm pitch
K	178mm reel, 8mm pitch
L	330mm reel, 12mm pitch

(9) Special reserved code

Code	Description
E	Soft termination

Capacitance range chart

C1005 [0402 inch]

Capacitance		C0G		X5R				X7R			
(pF)	Code	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1A (10V)	0J (6.3V)	1H (50V)	1V (35V)	1E (25V)	1C (16V)
100	101										
150	151										
220	221										
330	331										
470	471										
680	681										
1,000	102										
2,200	222										
4,700	472										
10,000	103										
22,000	223										
47,000	473										
100,000	104										
220,000	224										
470,000	474										
1,000,000	105										
2,200,000	225										
4,700,000	475										

Capacitance		X8R			
(pF)	Code	2A (100V)	1H (50V)	1E (25V)	1C (16V)
150	151				
220	221				
330	331				
470	471				
680	681				
1,000	102				
1,500	152				
2,200	222				
3,300	332				
4,700	472				
6,800	682				
10,000	103				
15,000	153				
22,000	223				
33,000	333				
47,000	473				

Standard thickness  0.50 mm Background gray: The product which is not recommended to a new design. Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C1608 [0603 inch]

Capacitance		C0G			X5R					X7R				
(pF)	Code	2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1C (16V)	1A (10V)	0J (6.3V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1A (10V)
100	101													
330	331													
470	471													
680	681													
1,000	102													
1,200	122													
1,500	152													
1,800	182													
2,200	222													
2,700	272													
3,300	332													
3,900	392													
4,700	472													
5,600	562													
6,800	682													
8,200	822													
10,000	103													
22,000	223													
47,000	473													
100,000	104													
220,000	224													
470,000	474													
1,000,000	105													
2,200,000	225													
4,700,000	475													
10,000,000	106													

Capacitance		X7S	X8R			
(pF)	Code	2A (100V)	2A (100V)	1H (50V)	1E (25V)	1C (16V)
1,000	102					
1,500	152					
2,200	222					
3,300	332					
4,700	472					
6,800	682					
10,000	103					
15,000	153					
22,000	223					
33,000	333					
47,000	473					
68,000	683					
100,000	104					
150,000	154					
220,000	224					
330,000	334					
470,000	474					

Standard thickness  0.8 mm Background gray: The product which is not recommended to a new design.

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C2012 [0805 inch]

Capacitance		C0G				X7R							X7S
(pF)	Code	2W (450V)	2E (250V)	2A (100V)	1H (50V)	2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1C (16V)	1A (10V)	2A (100V)
100	101												
150	151												
220	221												
330	331												
470	471												
680	681												
1,000	102												
1,200	122												
1,500	152												
1,800	182												
2,200	222												
2,700	272												
3,300	332												
3,900	392												
4,700	472												
5,600	562												
6,800	682												
10,000	103												
15,000	153												
22,000	223												
33,000	333												
47,000	473												
100,000	104												
220,000	224												
470,000	474												
1,000,000	105												
2,200,000	225												
4,700,000	475												
10,000,000	106												

Capacitance		X7T		X8R			
(pF)	Code	2W (450V)	2E (250V)	2A (100V)	1H (50V)	1E (25V)	1C (16V)
10,000	103						
22,000	223						
33,000	333						
47,000	473						
68,000	683						
100,000	104						
150,000	154						
220,000	224						
330,000	334						
470,000	474						
680,000	684						
1,000,000	105						

Standard thickness 0.60 mm 0.85 mm 1.25 mm

Background gray: The product which is not recommended to a new design.

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C3216 [1206 inch]

Capacitance		C0G					X7R							X7S
(pF)	Code	2J (630V)	2W (450V)	2E (250V)	2A (100V)	1H (50V)	2J (630V)	2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1C (16V)	2A (100V)
1,000	102													
2,200	222													
3,300	332													
3,900	392													
4,700	472													
5,600	562													
6,800	682													
8,200	822													
10,000	103													
15,000	153													
22,000	223													
33,000	333													
47,000	473													
68,000	683													
100,000	104													
220,000	224													
470,000	474													
1,000,000	105													
2,200,000	225													
4,700,000	475													
10,000,000	106													

Capacitance		X7T			X8R			
(pF)	Code	2J (630V)	2W (450V)	2E (250V)	2A (100V)	1H (50V)	1E (25V)	1C (16V)
47,000	473							
100,000	104							
150,000	154							
220,000	224							
330,000	334							
470,000	474							
680,000	684							
1,000,000	105							
1,500,000	155							
2,200,000	225							
3,300,000	335							
4,700,000	475							

Standard thickness 0.85 mm 1.15 mm 1.30 mm 1.60 mm

Background gray: The product which is not recommended to a new design.

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C3225 [1210 inch]

Capacitance		C0G					X7R				X7S	
(pF)	Code	3A (1kV)	2J (630V)	2W (450V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	1H (50V)	2A (100V)	1H (50V)
1,000	102											
1,200	122											
1,500	152											
1,800	182											
2,200	222											
2,700	272											
3,300	332											
3,900	392											
4,700	472											
5,600	562											
6,800	682											
8,200	822											
15,000	153											
22,000	223											
33,000	333											
47,000	473											
68,000	683											
100,000	104											
220,000	224											
470,000	474											
1,000,000	105											
2,200,000	225											
3,300,000	335											
4,700,000	475											
10,000,000	106											

Capacitance		X7T				X8R	
(pF)	Code	2J (630V)	2W (450V)	2E (250V)	2A (100V)	1E (25V)	1C (16V)
100,000	104						
150,000	154						
220,000	224						
330,000	334						
470,000	474						
680,000	684						
3,300,000	335						
4,700,000	475						
10,000,000	106						

Standard thickness  1.60 mm  2.00 mm  2.30 mm  2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C4520 [1808 inch]

Capacitance		X7R
(pF)	Code	3D (2kV)
1,000	102	

Standard thickness  1.30 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range chart

C4532 [1812 inch]

Capacitance		C0G		X7R			X7T		
(pF)	Code	3F (3kV)	2J (630V)	3D (2kV)	2J (630V)	2E (250V)	2J (630V)	2W (450V)	2E (250V)
330	331								
2,200	222								
33,000	333								
100,000	104								
220,000	224								
470,000	474								
1,000,000	105								

Standard thickness  1.30 mm  2.00 mm  2.30 mm  2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C5750 [2220 inch]

Capacitance		C0G			X7R		X7S	X7T		
(pF)	Code	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
68,000	683									
150,000	154									
220,000	224									
470,000	474									
1,000,000	105									
2,200,000	225									
10,000,000	106									

Standard thickness  2.30 mm  2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C7563 [3025 inch]

Capacitance		X7R	X7S	
(pF)	Code	1E (25V)	1H (50V)	1C (16V)
22,000,000	226			
47,000,000	476			
100,000,000	107			

Standard thickness  2.30 mm  2.80 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: C0G (-55 to +125°C, 0±30ppm/°C)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number			
				Rated voltage Edc: 3kV	Rated voltage Edc: 1kV	Rated voltage Edc: 630V	Rated voltage Edc: 450V
100pF	2012	0.60±0.15	±5%				C2012C0G2W101J060AE
150pF	2012	0.60±0.15	±5%				C2012C0G2W151J060AE
220pF	2012	0.60±0.15	±5%				C2012C0G2W221J060AE
330pF	2012	0.60±0.15	±5%				C2012C0G2W331J060AE
	4532	2.50±0.30	±10%	C4532C0G3F331K250KE			
470pF	2012	0.60±0.15	±5%				C2012C0G2W471J060AE
680pF	2012	0.60±0.15	±5%				C2012C0G2W681J060AE
	2012	0.60±0.15	±5%				C2012C0G2W102J060AE
1nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A102J200AE		
	2012	0.60±0.15	±5%				C2012C0G2W122J060AE
1.2nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A122J200AE		
	2012	0.85±0.15	±5%				C2012C0G2W152J085AE
1.5nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A152J200AE		
	2012	0.85±0.15	±5%				C2012C0G2W182J085AE
1.8nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A182J200AE		
	2012	0.85±0.15	±5%				C2012C0G2W222J085AE
2.2nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A222J200AE		
	2012	1.25+0.25,-0.20	±5%				C2012C0G2W272J125AE
2.7nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A272J200AE		
	2012	1.25+0.25,-0.20	±5%				C2012C0G2W332J125AE
3.3nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A332J200AE		
	2012	1.25+0.25,-0.20	±5%				C2012C0G2W392J125AE
3.9nF	3216	0.85±0.15	±5%			C3216C0G2J392J085AE	
	3225	2.00+0.30,-0.20	±5%		C3225C0G3A392J200AE		
4.7nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A472J200AE		
	3216	1.15±0.15	±5%			C3216C0G2J562J115AE	
5.6nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A562J200AE		
	3216	1.15±0.15	±5%			C3216C0G2J682J115AE	C3216C0G2W682J115AE
6.8nF	3225	2.00+0.30,-0.20	±5%		C3225C0G3A682J200AE		
	3216	1.15±0.15	±5%				C3216C0G2W822J115AE
8.2nF	3225	2.30+0.30,-0.20	±5%		C3225C0G3A822J200AE		
	3216	1.60+0.30,-0.20	±5%			C3216C0G2J822J160AE	
10nF	3216	1.60+0.30,-0.20	±5%			C3216C0G2J103J160AE	C3216C0G2W103J160AE
15nF	3225	1.60+0.30,-0.20	±5%			C3225C0G2J153J160AE	
	3225	2.50±0.30	±5%			C3225C0G2J333J250AE	C3225C0G2W333J250AE
33nF	4532	2.00+0.30,-0.20	±5%			C4532C0G2J333J200KE	
68nF	5750	2.30+0.30,-0.20	±5%			C5750C0G2J683J230KE	

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: C0G (-55 to +125°C, 0±30ppm/°C)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		
				Rated voltage Edc: 250V	Rated voltage Edc: 100V	Rated voltage Edc: 50V
100pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A101J050BE	C1005C0G1H101J050BE
	1608	0.80+0.15,-0.10	±5%			C1608C0G1H101J080AE
150pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A151J050BE	C1005C0G1H151J050BE
220pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A221J050BE	C1005C0G1H221J050BE
330pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A331J050BE	C1005C0G1H331J050BE
	1608	0.80+0.15,-0.10	±5%		C1608C0G2A331J080AE	C1608C0G1H331J080AE
470pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A471J050BE	C1005C0G1H471J050BE
	1608	0.80+0.15,-0.10	±5%		C1608C0G2A471J080AE	C1608C0G1H471J080AE
680pF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A681J050BE	C1005C0G1H681J050BE
	1608	0.80+0.15,-0.10	±5%		C1608C0G2A681J080AE	C1608C0G1H681J080AE
1nF	1005	0.50+0.10,-0.05	±5%		C1005C0G2A102J050BE	C1005C0G1H102J050BE
	1608	0.80+0.15,-0.10	±5%	C1608C0G2E102J080AE	C1608C0G2A102J080AE	C1608C0G1H102J080AE
1.2nF	1608	0.80+0.15,-0.10	±5%	C1608C0G2E122J080AE	C1608C0G2A122J080AE	C1608C0G1H122J080AE
1.5nF	1608	0.80+0.15,-0.10	±5%	C1608C0G2E152J080AE	C1608C0G2A152J080AE	C1608C0G1H152J080AE
1.8nF	1608	0.80+0.15,-0.10	±5%	C1608C0G2E182J080AE	C1608C0G2A182J080AE	C1608C0G1H182J080AE
2.2nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A222J080AE	C1608C0G1H222J080AE
2.7nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A272J080AE	C1608C0G1H272J080AE
3.3nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A332J080AE	C1608C0G1H332J080AE
	2012	0.85±0.15	±5%	C2012C0G2E332J085AE		
3.9nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A392J080AE	C1608C0G1H392J080AE
	2012	1.25+0.25,-0.20	±5%	C2012C0G2E392J125AE		
4.7nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A472J080AE	C1608C0G1H472J080AE
	2012	1.25+0.25,-0.20	±5%	C2012C0G2E472J125AE		
5.6nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A562J080AE	C1608C0G1H562J080AE
	2012	1.25+0.25,-0.20	±5%	C2012C0G2E562J125AE		
6.8nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A682J080AE	C1608C0G1H682J080AE
	2012	1.25+0.25,-0.20	±5%	C2012C0G2E682J125AE		
8.2nF	1608	0.80+0.15,-0.10	±5%		C1608C0G2A822J080AE	C1608C0G1H822J080AE
	1608	0.80+0.15,-0.10	±5%		C1608C0G2A103J080AE	C1608C0G1H103J080AE
10nF	3216	1.15±0.15	±5%	C3216C0G2E103J115AE		
	2012	0.85±0.15	±5%		C2012C0G2A153J085AE	C2012C0G1H153J085AE
15nF	3216	1.60+0.30,-0.20	±5%	C3216C0G2E153J160AE		
	2012	1.25+0.25,-0.20	±5%		C2012C0G2A223J125AE	C2012C0G1H223J125AE
22nF	3225	1.60+0.30,-0.20	±5%	C3225C0G2E223J160AE		
33nF	2012	1.25+0.25,-0.20	±5%		C2012C0G2A333J125AE	C2012C0G1H333J125AE
47nF	3216	1.15±0.15	±5%		C3216C0G2A473J115AE	C3216C0G1H473J115AE
68nF	3216	1.60+0.30,-0.20	±5%		C3216C0G2A683J160AE	C3216C0G1H683J160AE
	3225	2.30+0.30,-0.20	±5%		C3225C0G2A683J230AE	
100nF	3216	1.60+0.30,-0.20	±5%		C3216C0G2A104J160AE	C3216C0G1H104J160AE
150nF	5750	2.30+0.30,-0.20	±5%	C5750C0G2E154J230KE	C5750C0G2A154J230KE	

Capacitance range table

Temperature characteristics: X5R(-55 to +85°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number				
				Rated voltage Edc: 35V	Rated voltage Edc: 25V	Rated voltage Edc: 16V	Rated voltage Edc: 10V	Rated voltage Edc: 6.3V
470nF	1005	0.50+0.10,-0.05	±10%	C1005X5R1V474K050BE	C1005X5R1E474K050BE			
1µF	1005	0.50+0.15,-0.05	±10%	C1005X5R1V105K050BE	C1005X5R1E105K050BE			
2.2µF	1005	0.50+0.20,-0.10	±10%	C1005X5R1V225K050BE	C1005X5R1E225K050BE			
	1608	0.80+0.15,-0.10	±10%	C1608X5R1V225K080AE	C1608X5R1E225K080AE			
4.7µF	1005	0.50+0.20,-0.10	±10%				C1005X5R1A475K050BE	C1005X5R0J475K050BE
	1608	0.80+0.15,-0.10	±10%				C1608X5R1A475K080AE	
10µF	1608	0.80+0.20,-0.10	±10%			C1608X5R1C475K080AE		
								C1608X5R0J106K080AE

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		Rated voltage 2kV	Edc:	Rated voltage 630V	Edc:	Rated voltage 250V	Edc:	Rated voltage 100V	Edc:	Rated voltage 50V	Edc:
1nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H102K050BE C1005X7R1H102M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%							C1608X7R2A102K080AE C1608X7R2A102M080AE		C1608X7R1H102K080AE C1608X7R1H102M080AE			
	2012	0.85±0.15	±10% ±20%						C2012X7R2E102K085AE C2012X7R2E102M085AE		C2012X7R2A102K085AE C2012X7R2A102M085AE				
	3216	1.15±0.15	±10% ±20%					C3216X7R2J102K115AE C3216X7R2J102M115AE							
	4520	1.30±0.20	±10% ±20%	C4520X7R3D102K130KE C4520X7R3D102M130KE											
2.2nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H222K050BE C1005X7R1H222M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%							C1608X7R2A222K080AE C1608X7R2A222M080AE		C1608X7R1H222K080AE C1608X7R1H222M080AE			
	2012	0.85±0.15	±10% ±20%						C2012X7R2E222K085AE C2012X7R2E222M085AE		C2012X7R2A222K085AE C2012X7R2A222M085AE				
	3216	1.15±0.15	±10% ±20%					C3216X7R2J222K115AE C3216X7R2J222M115AE							
	4532	1.30±0.20	±10% ±20%	C4532X7R3D222K130KE C4532X7R3D222M130KE											
3.3nF	3216	1.15±0.15	±10% ±20%					C3216X7R2J332K115AE C3216X7R2J332M115AE							
4.7nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H472K050BE C1005X7R1H472M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%							C1608X7R2A472K080AE C1608X7R2A472M080AE		C1608X7R1H472K080AE C1608X7R1H472M080AE			
	2012	0.85±0.15	±10% ±20%						C2012X7R2E472K085AE C2012X7R2E472M085AE		C2012X7R2A472K085AE C2012X7R2A472M085AE				
	3216	1.15±0.15	±10% ±20%					C3216X7R2J472K115AE C3216X7R2J472M115AE							
10nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H103K050BE C1005X7R1H103M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%							C1608X7R2A103K080AE C1608X7R2A103M080AE		C1608X7R1H103K080AE C1608X7R1H103M080AE			
	2012	0.85±0.15	±10% ±20%							C2012X7R2A103K085AE C2012X7R2A103M085AE					
		1.25+0.25,-0.20	±10% ±20%						C2012X7R2E103K125AE C2012X7R2E103M125AE						
	3216	1.15±0.15	±10% ±20%					C3216X7R2J103K115AE C3216X7R2J103M115AE							
22nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H223K050BE C1005X7R1H223M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%							C1608X7R2A223K080AE C1608X7R2A223M080AE		C1608X7R1H223K080AE C1608X7R1H223M080AE			
	2012	1.25+0.25,-0.20	±10% ±20%							C2012X7R2E223K125AE C2012X7R2E223M125AE		C2012X7R2A223K125AE C2012X7R2A223M125AE			
		1.15±0.15	±10% ±20%						C3216X7R2E223K115AE C3216X7R2E223M115AE						
	3216	1.30±0.20	±10% ±20%					C3216X7R2J223K130AE C3216X7R2J223M130AE							
33nF	3216	1.60+0.30,-0.20	±10% ±20%					C3216X7R2J333K160AE C3216X7R2J333M160AE							
47nF	1005	0.50+0.10,-0.05	±10% ±20%											C1005X7R1H473K050BE C1005X7R1H473M050BE	
	1608	0.80+0.15,-0.10	±10% ±20%											C1608X7R1H473K080AE C1608X7R1H473M080AE	
	2012	1.25+0.25,-0.20	±10% ±20%							C2012X7R2A473K125AE C2012X7R2A473M125AE					
		1.60+0.30,-0.20	±10% ±20%						C3216X7R2E473K160AE C3216X7R2E473M160AE						
	3216														
	3225	2.00+0.30,-0.20	±10% ±20%					C3225X7R2J473K200AE C3225X7R2J473M200AE							

■ Gray item: The product which is not recommended to a new design.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		Rated voltage	Edc: 630V	Rated voltage	Edc: 250V	Rated voltage	Edc: 100V	Rated voltage	Edc: 50V	
68nF	3225	2.00+0.30,-0.20	±10%	C3225X7R2J683K200AE										
			±20%	C3225X7R2J683M200AE										
100nF	1005	0.50+0.10,-0.05	±10%	C1005X7R1H104K050BE										
			±20%	C1005X7R1H104M050BE										
	1608	0.80+0.15,-0.10	±10%	C1608X7R1H104K080AE										
			±20%	C1608X7R1H104M080AE										
	2012	1.25+0.25,-0.20	±10%	C2012X7R2A104K125AE										
			±20%	C2012X7R2A104M125AE										
	3216	1.60+0.30,-0.20	±10%	C2012X7R1H104K125AE										
			±20%	C2012X7R1H104M125AE										
	3225	2.00+0.30,-0.20	±10%	C3216X7R2E104K160AE										
			±20%	C3216X7R2A104K160AE										
4532	2.30+0.30,-0.20	±10%	C3216X7R2A104M160AE											
		±20%	C3225X7R2E104K200AE											
220nF	1608	0.80+0.15,-0.10	±10%	C3225X7R2E104M200AE										
			±20%	C4532X7R2J104K230KE										
	2012	1.25+0.25,-0.20	±10%	C4532X7R2J104M230KE										
			±20%											
	3216	1.15±0.15	±10%	C1608X7R1H224K080AE										
			±20%	C1608X7R1H224M080AE										
	3225	2.00+0.30,-0.20	±10%	C2012X7R1H224K125AE										
			±20%	C2012X7R1H224M125AE										
	5750	2.30+0.30,-0.20	±10%	C3216X7R2A224K115AE										
			±20%	C3216X7R2A224M115AE										
470nF	1608	0.80+0.15,-0.10	±10%	C3225X7R2E224K200AE										
			±20%	C3225X7R2E224M200AE										
	2012	1.25+0.25,-0.20	±10%	C5750X7R2J224K230KE										
			±20%	C5750X7R2J224M230KE										
	3216	1.60+0.30,-0.20	±10%	C1608X7R1H474K080AE										
			±20%	C1608X7R1H474M080AE										
	3225	2.00+0.30,-0.20	±10%	C2012X7R1H474K125AE										
			±20%	C2012X7R1H474M125AE										
	4532	2.30+0.30,-0.20	±10%	C3216X7R2A474K160AE										
			±20%	C3216X7R2A474M160AE										
1uF	2012	1.25+0.25,-0.20	±10%	C3225X7R2A474K200AE										
			±20%	C3225X7R2A474M200AE										
	3216	1.60+0.30,-0.20	±10%	C4532X7R2E474K230KE										
			±20%	C4532X7R2E474M230KE										
	3225	2.00+0.30,-0.20	±10%	C2012X7R1H105K125AE										
			±20%	C2012X7R1H105M125AE										
	5750	2.30+0.30,-0.20	±10%	C3216X7R2A105K160AE										
			±20%	C3216X7R2A105M160AE										
	2.2uF	2012	1.25+0.25,-0.20	±10%	C3225X7R2A105K200AE									
				±20%	C3225X7R2A105M200AE									
3216		1.60+0.30,-0.20	±10%	C5750X7R2E105K230KE										
			±20%	C5750X7R2E105M230KE										
3225		2.00+0.30,-0.20	±10%	C2012X7R1H225K125AE										
			±20%	C2012X7R1H225M125AE										
3225		2.30+0.30,-0.20	±10%	C3216X7R1H225K160AE										
			±20%	C3216X7R1H225M160AE										
4.7uF	3216	1.60+0.30,-0.20	±10%	C3225X7R1H225K200AE										
			±20%	C3225X7R1H225M200AE										

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		Rated voltage Edc: 25V	Rated voltage Edc: 16V	Rated voltage Edc: 10V
				Rated voltage	Edc: 35V			
220nF	1005	0.50+0.10,-0.05	±10%	C1005X7R1V224K050BE		C1005X7R1E224K050BE	C1005X7R1C224K050BE	
			±20%	C1005X7R1V224M050BE		C1005X7R1E224M050BE	C1005X7R1C224M050BE	
470nF	1608	0.80+0.15,-0.10	±10%	C1608X7R1V474K080AE		C1608X7R1E474K080AE		
			±20%	C1608X7R1V474M080AE		C1608X7R1E474M080AE		
1µF	1608	0.80+0.15,-0.10	±10%	C1608X7R1V105K080AE		C1608X7R1E105K080AE		
			±20%	C1608X7R1V105M080AE		C1608X7R1E105M080AE		
	2012	1.25+0.25,-0.20	±10%	C2012X7R1V105K125AE				
			±20%	C2012X7R1V105M125AE				
2.2µF	1608	0.80+0.15,-0.10	±10%					C1608X7R1A225K080AE
			±20%					C1608X7R1A225M080AE
	2012	1.25+0.25,-0.20	±10%	C2012X7R1V225K125AE		C2012X7R1E225K125AE		
			±20%	C2012X7R1V225M125AE		C2012X7R1E225M125AE		
4.7µF	3216	1.60+0.30,-0.20	±10%	C3216X7R1V225K160AE		C3216X7R1E225K160AE		
			±20%	C3216X7R1V225M160AE		C3216X7R1E225M160AE		
	2012	1.25+0.25,-0.20	±10%	C2012X7R1V475K125AE		C2012X7R1E475K125AE	C2012X7R1C475K125AE	
			±20%	C2012X7R1V475M125AE		C2012X7R1E475M125AE	C2012X7R1C475M125AE	
10µF	3216	1.60+0.30,-0.20	±10%	C3216X7R1V475K160AE		C3216X7R1E475K160AE		
			±20%	C3216X7R1V475M160AE		C3216X7R1E475M160AE		
	2012	1.25+0.25,-0.20	±10%					C2012X7R1A106K125AE
			±20%					C2012X7R1A106M125AE
47nF	7563	2.30 (2.50max.)	±10%					
			±20%					

Capacitance range table

Temperature characteristics: X7S (-55 to +125°C, ±22%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		Rated voltage Edc: 50V	Rated voltage Edc: 16V
				Rated voltage	Edc: 100V		
47nF	1608	0.80+0.15,-0.10	±10%	C1608X7S2A473K080AE			
			±20%	C1608X7S2A473M080AE			
100nF	1608	0.80+0.15,-0.10	±10%	C1608X7S2A104K080AE			
			±20%	C1608X7S2A104M080AE			
220nF	2012	0.85±0.15	±10%	C2012X7S2A224K085AE			
			±20%	C2012X7S2A224M085AE			
470nF	2012	1.25+0.25,-0.20	±10%	C2012X7S2A474K125AE			
			±20%	C2012X7S2A474M125AE			
1µF	2012	1.25+0.25,-0.20	±10%	C2012X7S2A105K125AE			
			±20%	C2012X7S2A105M125AE			
2.2µF	3216	1.60+0.30,-0.20	±10%	C3216X7S2A225K160AE			
			±20%	C3216X7S2A225M160AE			
3.3µF	3225	2.00+0.30,-0.20	±10%	C3225X7S2A335K200AE			
			±20%	C3225X7S2A335M200AE			
4.7µF	3225	2.00+0.30,-0.20	±10%	C3225X7S2A475K200AE			
			±20%	C3225X7S2A475M200AE			
	2.30+0.30,-0.20		±10%			C3225X7S1H475K230AE	
			±20%			C3225X7S1H475M230AE	
10µF	3225	2.50 ±0.30	±10%			C3225X7S1H106K250AE	
			±20%			C3225X7S1H106M250AE	
	5750	2.30+0.30,-0.20	±10%	C5750X7S2A106K230KE			
			±20%	C5750X7S2A106M230KE			
22µF	7563	2.30 (2.50max.)	±20%			C7563X7S1H226M230LE	
100µF	7563	2.80 (3.00max.)	±20%				C7563X7S1C107M280LE

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7T (-55 to +125°C, +22, -33%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number		
				Rated voltage Edc: 630V	Rated voltage Edc: 450V	Rated voltage Edc: 250V
10 nF	2012	0.85±0.15	± 10%		C2012X7T2W103K085AE	
			± 20%		C2012X7T2W103M085AE	
22 nF	2012	1.25+0.25,-0.20	± 10%		C2012X7T2W223K125AE	
			± 20%		C2012X7T2W223M125AE	
47 nF	2012	1.25+0.25,-0.20	± 10%		C2012X7T2W473K125AE	C2012X7T2E473K125AE
			± 20%		C2012X7T2W473M125AE	C2012X7T2E473M125AE
	3216	1.60+0.30,-0.20	± 10%	C3216X7T2J473K160AE		
			± 20%	C3216X7T2J473M160AE		
100 nF	2012	1.25+0.25,-0.20	± 10%			C2012X7T2E104K125AE
			± 20%			C2012X7T2E104M125AE
	3216	1.60+0.30,-0.20	± 10%		C3216X7T2W104K160AE	
			± 20%		C3216X7T2W104M160AE	
	3225	1.60+0.30,-0.20	± 10%	C3225X7T2J104K160AE		
			± 20%	C3225X7T2J104M160AE		
150 nF	3225	2.00+0.30,-0.20	± 10%	C3225X7T2J154K200AE		
			± 20%	C3225X7T2J154M200AE		
220 nF	3216	1.60+0.30,-0.20	± 10%			C3216X7T2E224K160AE
			± 20%			C3216X7T2E224M160AE
	3225	2.00+0.30,-0.20	± 10%		C3225X7T2W224K200AE	
			± 20%		C3225X7T2W224M200AE	
	4532	2.00+0.30,-0.20	± 10%	C4532X7T2J224K200KE		
			± 20%	C4532X7T2J224M200KE		
330 nF	3225	2.00+0.30,-0.20	± 10%			C3225X7T2E334K200AE
			± 20%			C3225X7T2E334M200AE
470 nF	4532	2.30+0.30,-0.20	± 10%		C4532X7T2W474K230KE	
			± 20%		C4532X7T2W474M230KE	
	5750	2.50±0.30	± 10%	C5750X7T2J474K250KE		
			± 20%	C5750X7T2J474M250KE		
1 µF	4532	2.50±0.30	± 10%			C4532X7T2E105K250KE
			± 20%			C4532X7T2E105M250KE
	5750	2.50±0.30	± 10%		C5750X7T2W105K250KE	
			± 20%		C5750X7T2W105M250KE	
2.2 µF	5750	2.50±0.30	± 10%			C5750X7T2E225K250KE
			± 20%			C5750X7T2E225M250KE

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X8R (-55 to +150°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number			
				Rated voltage Edc: 100V	Rated voltage Edc: 50V	Rated voltage Edc: 25V	Rated voltage Edc: 16V
150pF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A151K050BE	C1005X8R1H151K050BE		
			±20%	C1005X8R2A151M050BE	C1005X8R1H151M050BE		
220pF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A221K050BE	C1005X8R1H221K050BE		
			±20%	C1005X8R2A221M050BE	C1005X8R1H221M050BE		
330pF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A331K050BE	C1005X8R1H331K050BE		
			±20%	C1005X8R2A331M050BE	C1005X8R1H331M050BE		
470pF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A471K050BE	C1005X8R1H471K050BE		
			±20%	C1005X8R2A471M050BE	C1005X8R1H471M050BE		
680pF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A681K050BE	C1005X8R1H681K050BE		
			±20%	C1005X8R2A681M050BE	C1005X8R1H681M050BE		
1nF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A102K050BE	C1005X8R1H102K050BE		
			±20%	C1005X8R2A102M050BE	C1005X8R1H102M050BE		
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A102K080AE	C1608X8R1H102K080AE		
			±20%	C1608X8R2A102M080AE	C1608X8R1H102M080AE		
1.5nF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A152K050BE	C1005X8R1H152K050BE		
			±20%	C1005X8R2A152M050BE	C1005X8R1H152M050BE		
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A152K080AE	C1608X8R1H152K080AE		
			±20%	C1608X8R2A152M080AE	C1608X8R1H152M080AE		
2.2nF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A222K050BE	C1005X8R1H222K050BE		
			±20%	C1005X8R2A222M050BE	C1005X8R1H222M050BE		
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A222K080AE	C1608X8R1H222K080AE		
			±20%	C1608X8R2A222M080AE	C1608X8R1H222M080AE		
3.3nF	1005	0.50+0.10,-0.05	±10%	C1005X8R2A332K050BE	C1005X8R1H332K050BE		
			±20%	C1005X8R2A332M050BE	C1005X8R1H332M050BE		
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A332K080AE	C1608X8R1H332K080AE		
			±20%	C1608X8R2A332M080AE	C1608X8R1H332M080AE		
4.7nF	1005	0.50+0.10,-0.05	±10%		C1005X8R1H472K050BE		
			±20%		C1005X8R1H472M050BE		
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A472K080AE	C1608X8R1H472K080AE		
			±20%	C1608X8R2A472M080AE	C1608X8R1H472M080AE		
6.8nF	1005	0.50+0.10,-0.05	±10%		C1005X8R1H682K050BE	C1005X8R1E682K050BE	
			±20%		C1005X8R1H682M050BE	C1005X8R1E682M050BE	
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A682K080AE	C1608X8R1H682K080AE		
			±20%	C1608X8R2A682M080AE	C1608X8R1H682M080AE		
10nF	1005	0.50+0.10,-0.05	±10%		C1005X8R1H103K050BE	C1005X8R1E103K050BE	
			±20%		C1005X8R1H103M050BE	C1005X8R1E103M050BE	
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A103K080AE	C1608X8R1H103K080AE		
			±20%	C1608X8R2A103M080AE	C1608X8R1H103M080AE		
15nF	1005	0.50+0.10,-0.05	±10%			C1005X8R1E153K050BE	
			±20%			C1005X8R1E153M050BE	
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A153K080AE	C1608X8R1H153K080AE		
			±20%	C1608X8R2A153M080AE	C1608X8R1H153M080AE		
22nF	1005	0.50+0.10,-0.05	±10%			C1005X8R1E223K050BE	
			±20%			C1005X8R1E223M050BE	
	1608	0.80+0.15,-0.10	±10%	C1608X8R2A223K080AE	C1608X8R1H223K080AE		
			±20%	C1608X8R2A223M080AE	C1608X8R1H223M080AE		
33nF	2012	1.25+0.25,-0.20	±10%	C2012X8R2A223K125AE			
			±20%	C2012X8R2A223M125AE			
	1005	0.50+0.10,-0.05	±10%			C1005X8R1E333K050BE	C1005X8R1C333K050BE
			±20%			C1005X8R1E333M050BE	C1005X8R1C333M050BE
47nF	1608	0.80+0.15,-0.10	±10%		C1608X8R1H333K080AE		
			±20%		C1608X8R1H333M080AE		
	2012	1.25+0.25,-0.20	±10%	C2012X8R2A333K125AE			
			±20%	C2012X8R2A333M125AE			
68nF	1005	0.50+0.10,-0.05	±10%			C1005X8R1E473K050BE	C1005X8R1C473K050BE
			±20%			C1005X8R1E473M050BE	C1005X8R1C473M050BE
	1608	0.80+0.15,-0.10	±10%		C1608X8R1H473K080AE		
			±20%		C1608X8R1H473M080AE		
82nF	2012	1.25+0.25,-0.20	±10%	C2012X8R2A473K125AE			
			±20%	C2012X8R2A473M125AE			
100nF	1608	0.80+0.15,-0.10	±10%		C1608X8R1H683K080AE	C1608X8R1E683K080AE	
			±20%		C1608X8R1H683M080AE	C1608X8R1E683M080AE	
	2012	1.25+0.25,-0.20	±10%	C2012X8R2A683K125AE	C2012X8R1H683K125AE		
			±20%	C2012X8R2A683M125AE	C2012X8R1H683M125AE		

■ Gray item: The product which is not recommended to a new design.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X8R (-55 to +150°C, ±15%)

Capacitance	Dimensions	Thickness (mm)	Capacitance tolerance	Catalog number			
				Rated voltage Edc: 100V	Rated voltage Edc: 50V	Rated voltage Edc: 25V	Rated voltage Edc: 16V
100nF	1608	0.80+0.15,-0.10	±10%		C1608X8R1H104K080AE	C1608X8R1E104K080AE	
			±20%		C1608X8R1H104M080AE	C1608X8R1E104M080AE	
	2012	1.25+0.25,-0.20	±10%		C2012X8R1H104K125AE		
			±20%		C2012X8R1H104M125AE		
	3216	1.15±0.15	±10%	C3216X8R2A104K115AE			
			±20%	C3216X8R2A104M115AE			
150nF	1608	0.80+0.15,-0.10	±10%			C1608X8R1E154K080AE	
			±20%			C1608X8R1E154M080AE	
	2012	0.85±0.15	±10%			C2012X8R1E154K085AE	
			±20%			C2012X8R1E154M085AE	
		1.25+0.25,-0.20	±10%		C2012X8R1H154K125AE		
			±20%		C2012X8R1H154M125AE		
	3216	1.60+0.30,-0.20	±10%	C3216X8R2A154K160AE			
			±20%	C3216X8R2A154M160AE			
220nF	1608	0.80+0.15,-0.10	±10%			C1608X8R1E224K080AE	
			±20%			C1608X8R1E224M080AE	
	2012	1.25+0.25,-0.20	±10%		C2012X8R1H224K125AE	C2012X8R1E224K125AE	
			±20%		C2012X8R1H224M125AE	C2012X8R1E224M125AE	
	3216	1.60+0.30,-0.20	±10%	C3216X8R2A224K160AE			
			±20%	C3216X8R2A224M160AE			
330nF	1608	0.80+0.15,-0.10	±10%			C1608X8R1E334K080AE	C1608X8R1C334K080AE
			±20%			C1608X8R1E334M080AE	C1608X8R1C334M080AE
	2012	1.25+0.25,-0.20	±10%			C2012X8R1E334K125AE	
			±20%			C2012X8R1E334M125AE	
	3216	1.60+0.30,-0.20	±10%	C3216X8R2A334K160AE	C3216X8R1H334K160AE		
			±20%	C3216X8R2A334M160AE	C3216X8R1H334M160AE		
470nF	1608	0.80+0.15,-0.10	±10%				C1608X8R1C474K080AE
			±20%				C1608X8R1C474M080AE
	2012	1.25+0.25,-0.20	±10%			C2012X8R1E474K125AE	
			±20%			C2012X8R1E474M125AE	
	3216	1.60+0.30,-0.20	±10%		C3216X8R1H474K160AE		
			±20%		C3216X8R1H474M160AE		
680nF	3225	2.00+0.30,-0.20	±10%	C3225X8R2A474K200AE			
			±20%	C3225X8R2A474M200AE			
	2012	1.25+0.25,-0.20	±10%			C2012X8R1E684K125AE	C2012X8R1C684K125AE
			±20%			C2012X8R1E684M125AE	C2012X8R1C684M125AE
	3216	1.60+0.30,-0.20	±10%		C3216X8R1H684K160AE		
			±20%		C3216X8R1H684M160AE		
1µF	3225	2.50±0.30	±10%	C3225X8R2A684K250AE			
			±20%	C3225X8R2A684M250AE			
	2012	1.25+0.25,-0.20	±10%			C2012X8R1E105K125AE	C2012X8R1C105K125AE
			±20%			C2012X8R1E105M125AE	C2012X8R1C105M125AE
	3216	1.60+0.30,-0.20	±10%		C3216X8R1H105K160AE	C3216X8R1E105K160AE	
			±20%		C3216X8R1H105M160AE	C3216X8R1E105M160AE	
1.5µF	3216	1.60+0.30,-0.20	±10%			C3216X8R1E155K160AE	
			±20%			C3216X8R1E155M160AE	
2.2µF	3216	1.60+0.30,-0.20	±10%			C3216X8R1E225K160AE	
			±20%			C3216X8R1E225M160AE	
3.3µF	3216	1.60+0.30,-0.20	±10%			C3216X8R1E335K160AE	C3216X8R1C335K160AE
			±20%			C3216X8R1E335M160AE	C3216X8R1C335M160AE
	3225	2.50±0.30	±10%			C3225X8R1E335K250AE	
			±20%			C3225X8R1E335M250AE	
4.7µF	3216	1.60+0.30,-0.20	±10%			C3216X8R1E475K160AE	C3216X8R1C475K160AE
			±20%			C3216X8R1E475M160AE	C3216X8R1C475M160AE
	3225	2.50±0.30	±10%			C3225X8R1E475K250AE	
			±20%			C3225X8R1E475M250AE	
10µF	3225	2.50±0.30	±10%			C3225X8R1E106K250AE	C3225X8R1C106K250AE
			±20%			C3225X8R1E106M250AE	C3225X8R1C106M250AE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

C2012X7R1C475M/SOFT	C2012X7R1H105M/SOFT	C2012X7R1H474M/SOFT	C2012X7R1V225M/SOFT
C2012X7R2E103M/SOFT	C2012X7R2E223M/SOFT	C2012X7S2A105M/SOFT	C2012X7S2A224M/SOFT
C2012X7S2A474M/SOFT	C2012X7T2E104M/SOFT	C2012X7T2E473M/SOFT	C2012X7T2W103M/SOFT
C2012X7T2W223M/SOFT	C2012X7T2W473M/SOFT	C3216X7R1E106M/SOFT	C3216X7R1H105M/SOFT
C3216X7R1H225M/SOFT	C3216X7R1V475M/SOFT	C3216X7R2A105M/SOFT	C3216X7R2A474M/SOFT
C3216X7R2E104M/SOFT	C3216X7R2J103M/SOFT	C3216X7R2J223M/SOFT	C3216X7S2A225M/SOFT
C3216X7T2E224M/SOFT	C3216X7T2J473M/SOFT	C3216X7T2W104M/SOFT	C3225X7R2A225M/SOFT
C3225X7R2E104M/SOFT	C3225X7R2E224M/SOFT	C3225X7R2J473M/SOFT	C3225X7S1H106M/SOFT
C3225X7S1H475M/SOFT	C3225X7S2A475M/SOFT	C3225X7T2J104M/SOFT	C3225X7T2W224M/SOFT
C4532X7R2E474M/SOFT	C4532X7T2E105M/SOFT	C4532X7T2J224M/SOFT	C4532X7T2W474M/SOFT
C5750X7R2E105M/SOFT	C5750X7S2A106M/SOFT	C5750X7T2E225M/SOFT	C5750X7T2J474M/SOFT
C5750X7T2W105M/SOFT	C3225X7T2J104M160AE	C5750X7R2E105M230KE	C2012X7T2W103K085AE
C2012X7R2E223M125AE	C2012X7T2E473M125AE	C2012X7T2W223M125AE	C3216X7R2A105K160AE
C3216X7R1E106K160AE	C3225X7R2A225K230AE	C3225X7S1H106M250AE	C3225X7S1H475K230AE
C4532X7R2E474M230KE	C5750X7T2J474K250KE	C4532X7T2W474K230KE	C5750X7R2E105K230KE
C3216X7R2J223K130AE	C3216X7R2A474K160AE	C5750X7T2J474M250KE	C3225X7T2J104K160AE
C3225X7R2E224M200AE	C3225X7R2J473K200AE	C3225X7R2J473M200AE	C3225X7S2A475M200AE
C4532X7T2J224K200KE	C2012X7R1C475M125AE	C2012X7T2W103M085AE	C2012X7S2A105K125AE
C2012X7S2A105M125AE	C2012X7S2A224K085AE	C3216X7R1E106M160AE	C3216X7R2J103K115AE
C3216X7R2J223M130AE	C3216X7T2W104K160AE	C3225X7R2E224K200AE	C4532X7T2E105M250KE
C4532X7T2J224M200KE	C4532X7T2W474M230KE	C5750X7T2E225M250KE	C2012X7R1H105K125AE
C2012X7S2A474M125AE	C2012X7T2W223K125AE	C3216X7R1H225M160AE	C3216X7S2A225K160AE
C3216X7T2W104M160AE	C3225X7S1H106K250AE	C3225X7S1H475M230AE	C5750X7T2W105M250KE
C5750X7S2A106M230KE	C2012X7R1H105M125AE	C2012X7T2W473M125AE	C3216X7R1V475M160AE
C3216X7R2A105M160AE	C3216X7R2E104M160AE	C3216X7T2E224K160AE	C3216X7R1H105M160AE