


6		5		4		3	
ITEM	PART#	DESCRIPTION		QTY	UOM		
A	5024390400	2.0 W/B Single Plug Hsg 4Ckt		1	PC		
B	5024380000	2.0 W/B Single Plug Term W/Plt Chain		4	PC		
C	--	WHITE PART ID LABEL		1	PC		

2		1	
FROM	TO	DESCRIPTION	COLOUR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

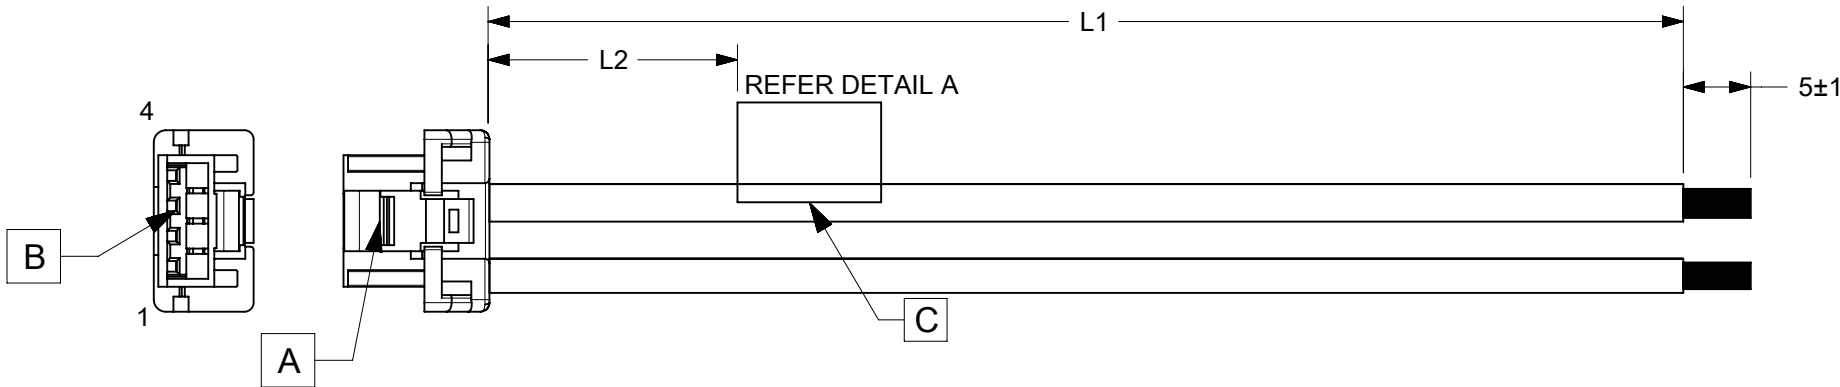

PART NUMBER	TITLE	L1	L2(REF)
2219591040	Clik-Mate 2.0 R-S 4ckt 50mm disc Sn	50±5	15
2219591041	Clik-Mate 2.0 R-S 4ckt 100mm disc Sn	100±5	15
2219591042	Clik-Mate 2.0 R-S 4ckt 150mm disc Sn	150±5	15
2219591043	Clik-Mate 2.0 R-S 4ckt 300mm disc Sn	300±5	15
2219591044	Clik-Mate 2.0 R-S 4ckt 600mm disc Sn	600±5	15

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

NOTES

1. CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
2. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
5.TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
6.FREE ENDS MUST BE STRIPPED,TWISTED & TINNED.
THE LENGTH OF TINNING IS 5±1 MM.TINNING DIA MUST BE 0.9MM MAX.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2022/02/12	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2022/12/23 12:42:18

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	CURRENT REV DESC:	
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	ANGULAR TOL ± °	
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	INITIAL REVISION:	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
	THIRD ANGLE PROJECTION	
	DRAWING	A4-SIZE
	SERIES	221959
	DOCUMENT NUMBER	
	2219591040	
	DOC TYPE	
	PSD	
	DOC PART	
	000	
	REVISION	
	A	
	SHEET NUMBER	
	1 OF 1	
	MATERIAL NUMBER	
	SEE TABLE	
	CUSTOMER	
	GENERAL MARKET	