

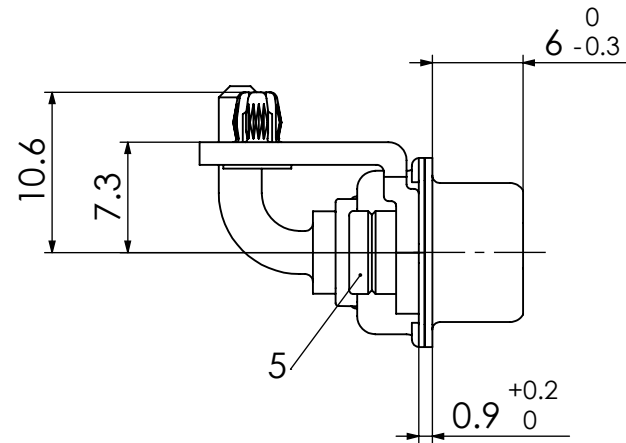
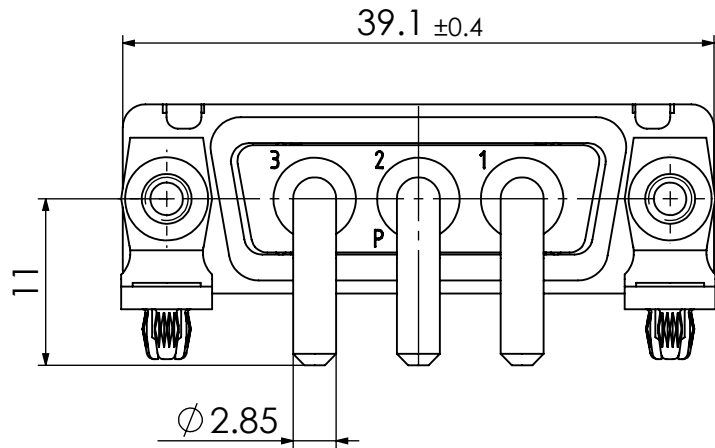
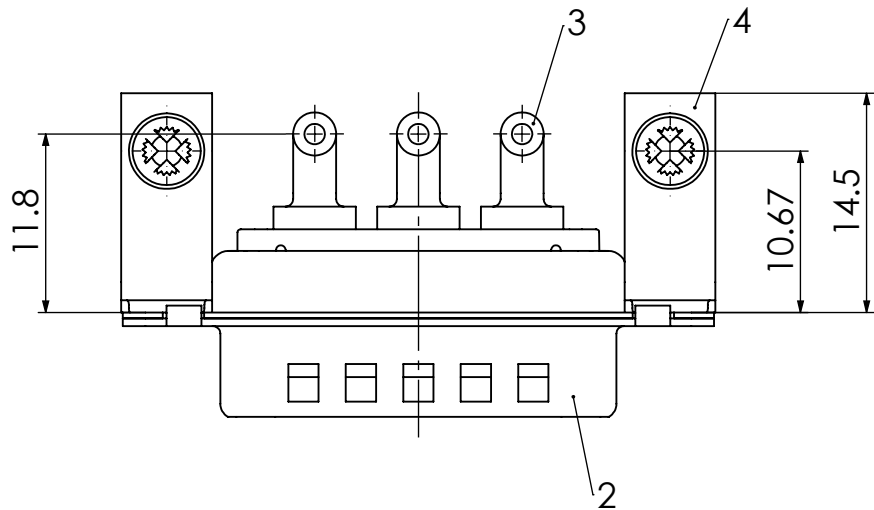


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

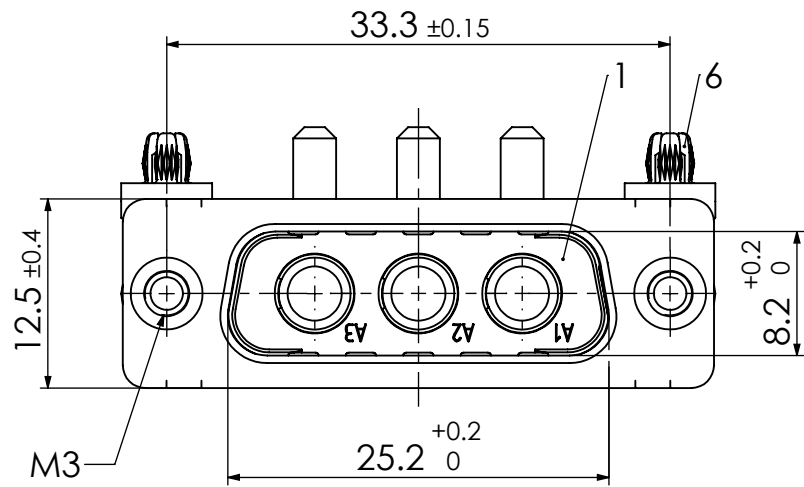

PCB hole pattern, mounting side

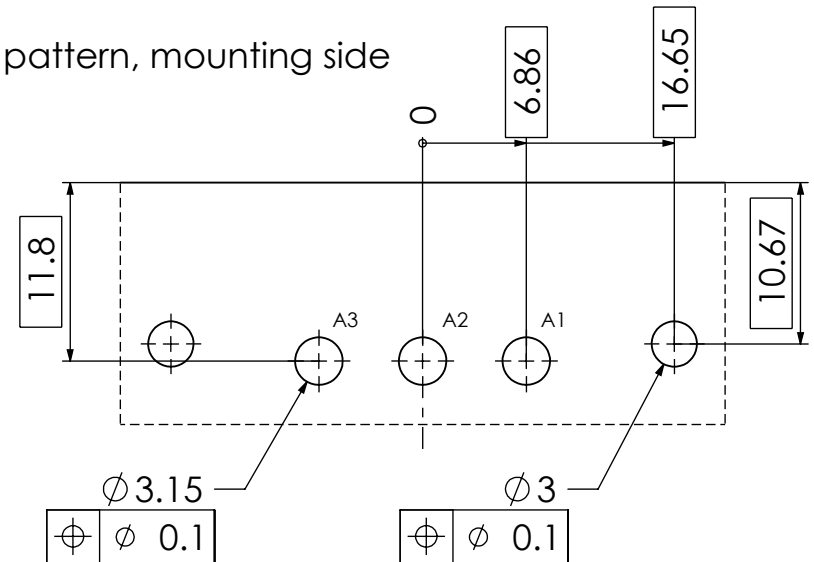

6	2	Snap-in rivet	PCB 1,6mm / Brass	tin plated
5	2	Clinch nut	MW M3 / Steel	tin plated
4	2	Bracket	F1080-13B / Steel	tin plated
3	3	High power contact	FMP008P105R	20A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
FUNCTIONAL SYMBOLS				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DIMENSION UNITS		SCALE	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m	
mm		2:1		
			CURRENT REVISION	
			DRWN: DRAWN BY	mteubel 07-12-2023
			APPR: APPR BY	msteinbrueck 03-01-2024
			INITIAL REVISION	
			DRWN: DRAWN BY	birgit.rinder 11-09-2009
			APPR: APPR BY	sschref 11-09-2009
			PRODUCT CUSTOMER DRAWING	
			MATERIAL NUMBER	
			1731070561	
			REVISION	
			3	
			DOCUMENT NUMBER	
			FM3W3P-3477	
			CUSTOMER	
			GENERAL MARKET	
			SHEET NUMBER	
			1 OF 1	