

## Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Multifunctional safety relay for emergency stop, safety doors, and light grid monitoring up to SIL 3, Cat. 4, PL e, automatically or manually monitored activation, 4 N/O contacts, 3 safety functions, 2 shutdown levels, pluggable push-in terminal blocks

### Your advantages

- ✓ Up to Cat.4/PL e according to EN ISO 13849-1, SILCL 3 according to EN 62061, SIL 3 according to IEC 61508
- ✓ 3 safety functions in one device
- ✓ Low housing width of only 22.5mm
- ✓ No software configuration required
- ✓ Also available with push-in connection



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 046356 729833 |
| GTIN         | 4046356729833                                                                                           |

### Technical data

#### Note

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---------------------------------------------------------------------------|

#### Dimensions

|        |          |
|--------|----------|
| Width  | 22.5 mm  |
| Height | 106.4 mm |
| Depth  | 114.5 mm |

#### Ambient conditions

|                                                |                                                     |
|------------------------------------------------|-----------------------------------------------------|
| Ambient temperature (operation)                | -20 °C ... 45 °C (see derating curve)               |
| Ambient temperature (storage/transport)        | -25 °C ... 85 °C                                    |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |

# Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

## Technical data

### Ambient conditions

|                                               |                                                     |
|-----------------------------------------------|-----------------------------------------------------|
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Maximum altitude                              | ≤ 2000 m (Above sea level)                          |

### Input data

|                                               |                                                                                                     |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Nominal input voltage $U_N$                   | 24 V DC                                                                                             |
| Input voltage range in reference to $U_N$     | 0.85 ... 1.1                                                                                        |
| Typical input current at $U_N$                | 125 mA (with actuated relays)                                                                       |
|                                               | 55 mA (Two-channel 24 V/0 V + max. 200 mA control (message outputs 32/62) with non-actuated relays) |
| Current consumption                           | typ. 5 mA ( $I_{max}/I_x$ inputs)                                                                   |
|                                               | 20 mA (in electric torque)                                                                          |
| Voltage at input/start and feedback circuit   | 24 V -15 %; +10 % (first channel: 24 V; second channel: 0 V)                                        |
| Typical response time                         | 175 ms (monitored/manual start)                                                                     |
|                                               | 250 ms (automatic start)                                                                            |
| Typ. starting time with $U_s$                 | 250 ms (when controlled via A1)                                                                     |
| Typical release time                          | 25 ms (when controlled via S11/S12 and S21/S22)                                                     |
|                                               | 20 ms (when controlled via A1)                                                                      |
| Concurrence input 1/2                         | ∞                                                                                                   |
| Recovery time                                 | 1 s (Availability time after activation of sensor circuit: 100ms)                                   |
| Operating voltage display                     | 1 x green LED                                                                                       |
| Status display                                | 5 green LEDs                                                                                        |
| Protective circuit                            | Surge protection Suppressor diode                                                                   |
| Maximum switching frequency                   | 0.5 Hz                                                                                              |
| Max. permissible overall conductor resistance | 100 Ω                                                                                               |
| Filter time                                   | max. 1.5 ms (Test pulse duration; for all equivalent inputs)                                        |
|                                               | min. 7.5 ms (Test pulse rate; for all equivalent inputs)                                            |

### Output data

|                                       |                                                                             |
|---------------------------------------|-----------------------------------------------------------------------------|
| Contact type                          | 4 enabling current paths                                                    |
|                                       | 2 semiconductor alarm outputs                                               |
| Contact material                      | AgCuNi, +0.2 -0.4 μm Au                                                     |
| Maximum switching voltage             | 250 V AC/DC                                                                 |
| Minimum switching voltage             | 10 V AC/DC                                                                  |
| Limiting continuous current           | 6 A (N/O contact)                                                           |
|                                       | max. 100 mA (Alarm output (24 V DC))                                        |
| Maximum inrush current                | 6 A                                                                         |
| Inrush current, minimum               | 10 mA                                                                       |
| Sq. Total current                     | $72 A^2 (I_{TH}^2 = I_1^2 + I_2^2 + I_3^2 + I_4^2 \text{ (note derating)})$ |
| Interrupting rating (ohmic load) max. | 1500 VA (250 V AC, $\tau = 0$ ms)                                           |
|                                       | 66 W (220 V DC, $\tau = 0$ ms)                                              |
|                                       | 66 W (110 V DC, $\tau = 0$ ms)                                              |
|                                       | 100 W (48 V DC, $\tau = 0$ ms)                                              |

# Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

## Technical data

### Output data

|                                              |                                                |
|----------------------------------------------|------------------------------------------------|
|                                              | 144 W (24 V DC, $\tau = 0$ ms)                 |
| Maximum interrupting rating (inductive load) | 48 W (24 V DC, $\tau = 40$ ms)                 |
|                                              | 43 W (48 V DC, $\tau = 40$ ms)                 |
| Switching capacity min.                      | 0.1 W                                          |
| Mechanical service life                      | 10x 10 <sup>6</sup> cycles                     |
| Switching capacity (360/h cycles)            | 5 A (0,1 Hz; DC13; 24 V)                       |
| Output fuse                                  | 6 A gL/gG NEOZED (N/O contact)                 |
|                                              | 4 A gL/gG NEOZED (for low-demand applications) |

### General

|                                             |                                                                                   |
|---------------------------------------------|-----------------------------------------------------------------------------------|
| Relay type                                  | Electromechanical relay with forcibly guided contacts in accordance with EN 50205 |
| Nominal operating mode                      | 100% operating factor                                                             |
| Net weight                                  | 26.1 g                                                                            |
| Mounting position                           | vertical or horizontal                                                            |
| Mounting type                               | DIN rail mounting                                                                 |
| Assembly instructions                       | See derating curve                                                                |
| Degree of protection                        | IP20                                                                              |
| Min. degree of protection of inst. location | IP54                                                                              |
| Housing color                               | yellow                                                                            |

### Connection data

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Push-in connection  |
| pluggable                             | no                  |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 10 mm               |
| Screw thread                          | M3                  |

### Safety-related characteristic data

|                                             |                                          |
|---------------------------------------------|------------------------------------------|
| Stop category                               | 0                                        |
| Safety Integrity Level (SIL)                | 3                                        |
|                                             | 3                                        |
| Designation                                 | EN ISO 13849                             |
| Performance level (PL)                      | e (5 A DC13; 3 A AC15; 8760 cycles/year) |
| Category                                    | 4                                        |
| Safety Integrity Level Claim Limit (SIL CL) | 3                                        |
| Designation                                 | EN 50156                                 |

## Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

### Technical data

#### Safety-related characteristic data

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

#### Standards and Regulations


|                                |                                                                                                                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation                    | Air clearances and creepage distances between the power circuits                                                                                                                             |
| Standards/regulations          | DIN EN 50178/VDE 0160                                                                                                                                                                        |
| Rated insulation voltage       | 250 V AC                                                                                                                                                                                     |
| Rated surge voltage/insulation | 4 kV/basic isolation (safe isolation, reinforced insulation and 6 kV between input circuit, enabling current paths and safety circuit 1 (13/14, 23/24) and safety circuit 2 (43/44, 53/54).) |
| Degree of pollution            | 2                                                                                                                                                                                            |
| Overvoltage category           | III                                                                                                                                                                                          |

#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
|            | Lead 7439-92-1                                          |
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


### Drawings

Application drawing

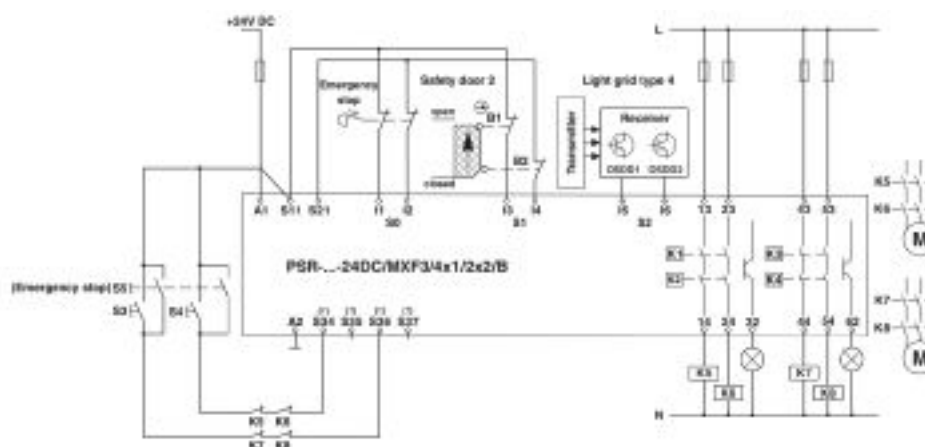


## Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

Circuit diagram

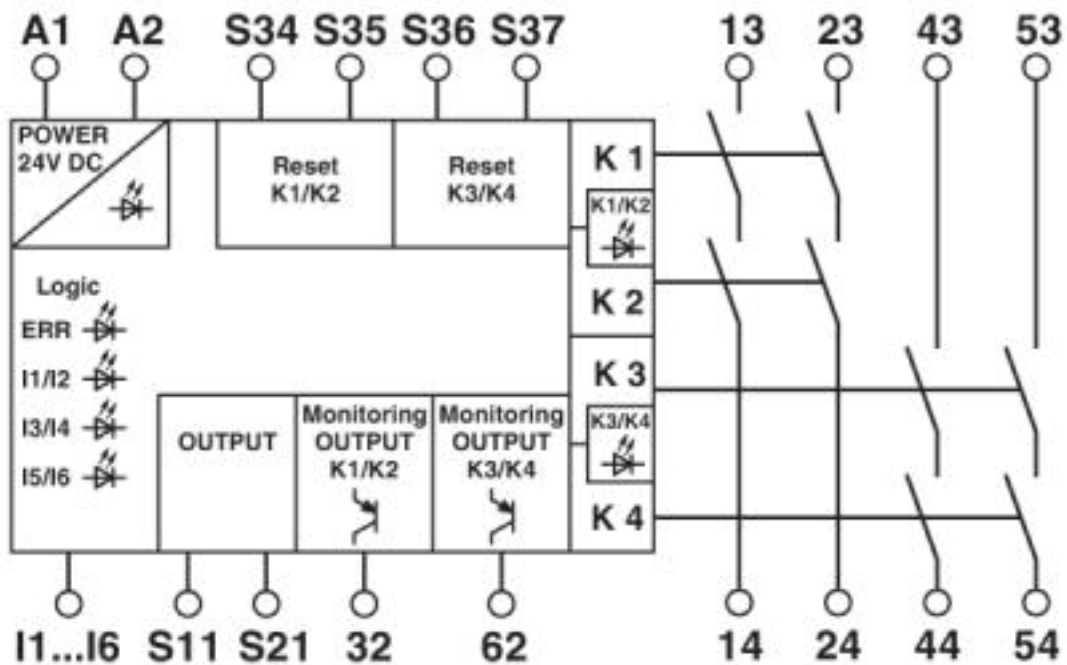


Circuit diagram

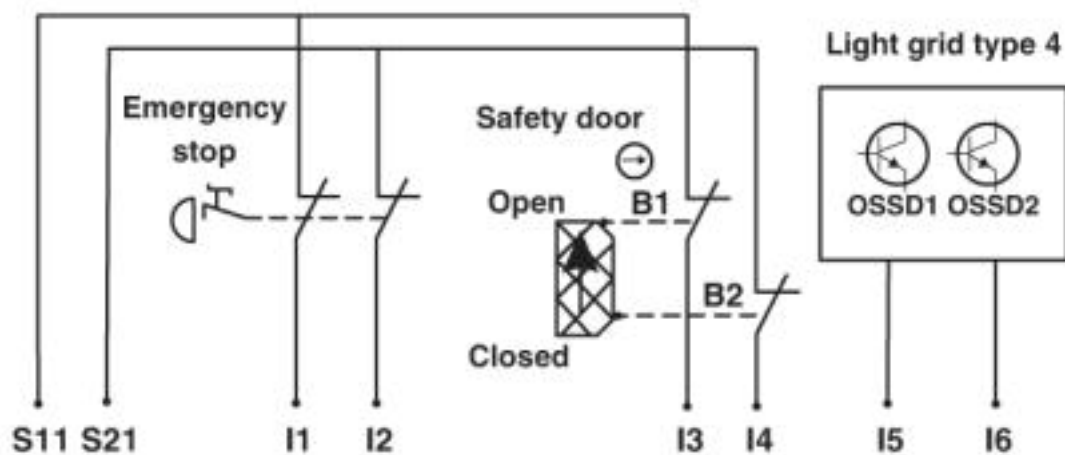

## Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

Circuit diagram

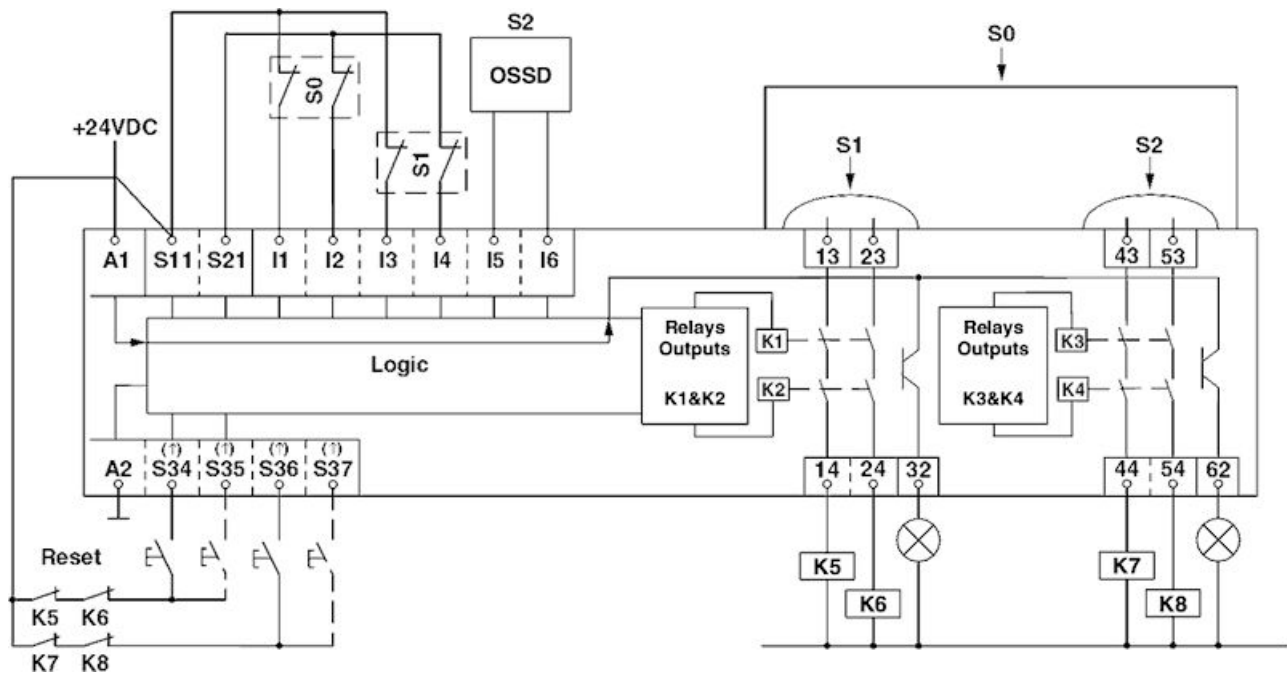

### Approvals

#### Approvals

Approvals

UL Listed / cUL Listed / Functional Safety / UL Listed / cUL Listed / Functional Safety / EAC / EAC

Ex Approvals

#### Approval details

## Safety relays - PSR-PIP-24DC/MXF3/4X1/2X2/B - 2903259

### Approvals

|                   |                                                                                     |                                                                                                                                                       |                          |
|-------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| UL Listed         |    | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324            |
| cUL Listed        |    | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324            |
| Functional Safety |    |                                                                                                                                                       | 01/205/5353.00/13        |
| UL Listed         |    | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324            |
| cUL Listed        |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324            |
| Functional Safety |  |                                                                                                                                                       | 01/205/5353.00/13        |
| EAC               |  |                                                                                                                                                       | RU C-<br>DE.A*30.B.01082 |
| EAC               |  |                                                                                                                                                       | RU C-<br>DE.A*30.B.01082 |