
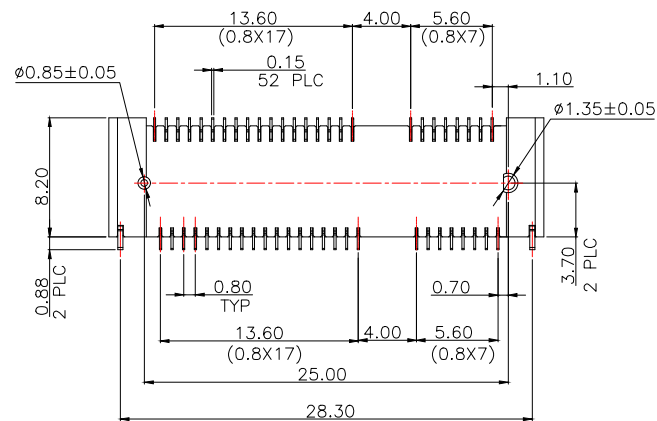
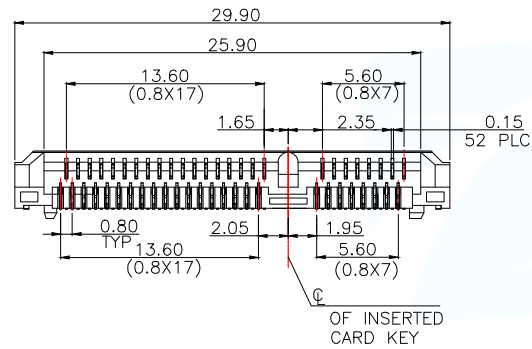
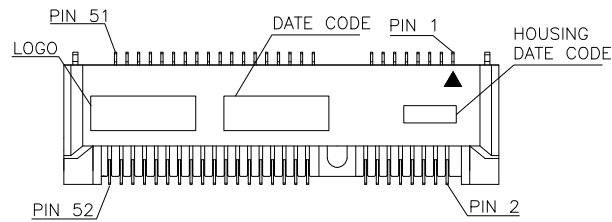


NOTES:

- MATERIAL:
HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0, BLACK COLOR,
CONTACTS: COPPER ALLOY.
PEGS: COPPER ALLOY.
- FINISH:
CONTACTS: SELECTED GOLD PLATING ON THE CONTACT AREA,
1u" MIN. GOLD PLATING ON THE SOLDER TAILS,
50 u" MIN. NICKEL UNDERPLATING OVER ALL.
PEGS: 120u" MIN. MATTE-TIN OVER 50u" MIN. NICKEL.

SPECIFICATION

CURRENT RATING : 0.5A 50V AC/DC
CONTACT RESISTANCE : 55 mΩ MAX
INSULATION RESISTANCE : 500 MΩ MIN AT 500V DC
OPERATING TEMPERATURE : -55°C~80°C

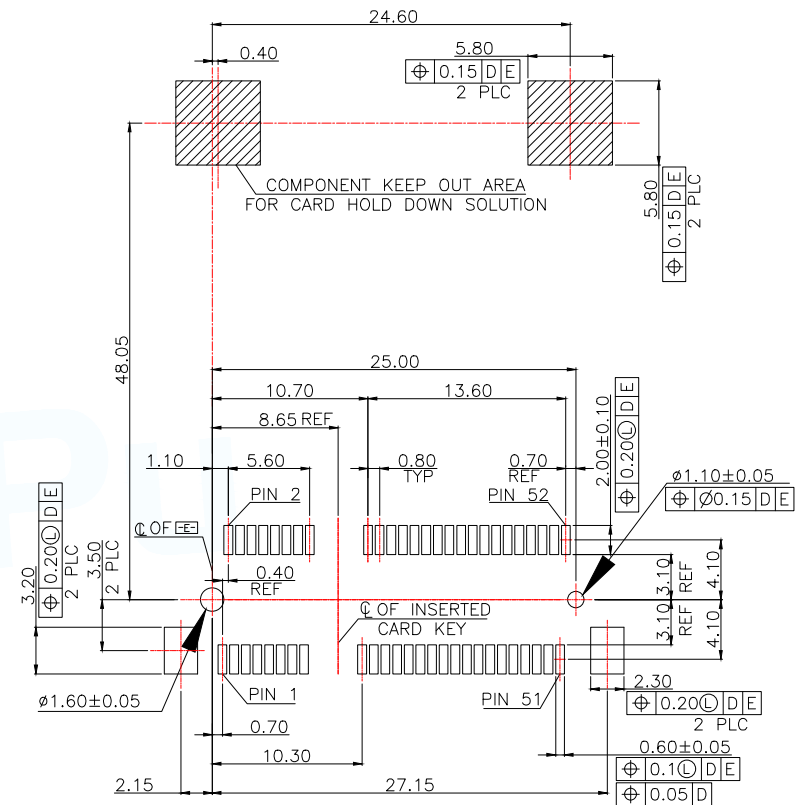

[-D-] IS THE TOP SURFACE OF PCB.

RECOMMENDED P.C. BOARD PATTERN LAYOUT

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:0.80MM PITCH MINPNCIEXPRESS HIGH=4.0mm 52 PIN CONNECTOR		
			PAR	PCIE-52P40H	
DECIMALS:	ANGLES:		DWN		
X.:±0.40	X*.:±1.5°		CHKD		
X.X:±0.30	X.X*.:±1.0°		APVD		
X.XX:±0.20	X.XX*.:±0.5°		SCALE1:1	UNIT:MM	
		CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A