

EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813

<https://www.phoenixcontact.com/us/products/1623813>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect, DC charging cable with Vehicle Connector, open cable end, with protective cap, GB/T, GB/T 20234.3-2015, cable: 4 m, Special cable stripping (0.5 m)

Product description

DC charging cable with vehicle charging connector and free cable end for fast charging of electric vehicles (EV) with direct current (DC) via GB/T vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- Consistent design of all Phoenix Contact Vehicle Connectors and Infrastructure Plugs
- Silver-plated surface of the power and signal contacts
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Convenient handling, thanks to the ergonomic handle and additional, rubber grip components
- Material data available in the IMDS (International Material Data System of the automotive industry)
- Integrated temperature sensors for monitoring the temperature at the power contacts
- Integrated interlock during charging

Commercial data

Item number	1623813
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	XWBAAG
GTIN	4055626192161
Weight per piece (including packing)	7.213 kg
Weight per piece (excluding packing)	7.092 kg
Country of origin	DE

EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813

<https://www.phoenixcontact.com/us/products/1623813>

Technical data

Notes

Order information:	Special cable stripping (0.5 m)
--------------------	---------------------------------

Product properties

Product type	DC charging cable
Product family	CHARX connect
Application	DC charging cable with Vehicle Connector, open cable end, with protective cap
Charging standard	GB/T
Charging mode	Mode 4

Electrical properties

Type of charging current	DC
Charging power	125 kW
Charging current	125 A

Temperature sensors (Pt 1000)

Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	Sensor for the DC contacts
Switch-off temperature	90 °C ±1 K (equivalent to a Pt 1000 value of 1346.5 Ω)
Long-term stability	0.06 % (after 1000 hours at 130 °C)
Recommended measured current	1 mA (1 V at 0°C)
Coefficient	3850 ppm/K
Ambient temperature	-50 °C ... 130 °C (Operation)

Cable/line

Cable length	4 m
Stripping length of the sheath	500 mm ±20 mm
Stripping length	500 mm ±20 mm

Standards and regulations

Standards

Standards/regulations	GB/T 20234.3-2015
-----------------------	-------------------


EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable

1623813

<https://www.phoenixcontact.com/us/products/1623813>

Drawings

Schematic diagram

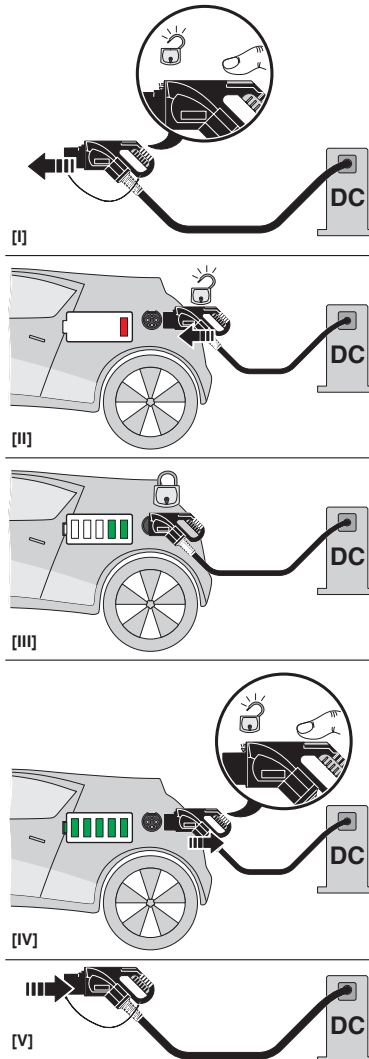

Operating instructions


EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813


<https://www.phoenixcontact.com/us/products/1623813>

Dimensional drawing

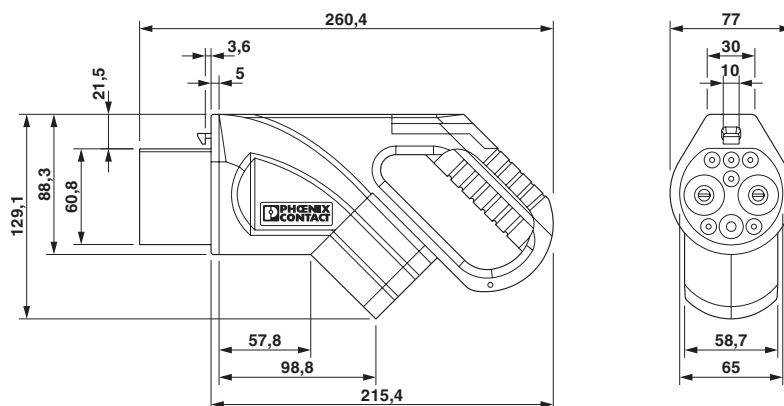

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.

Schematic diagram

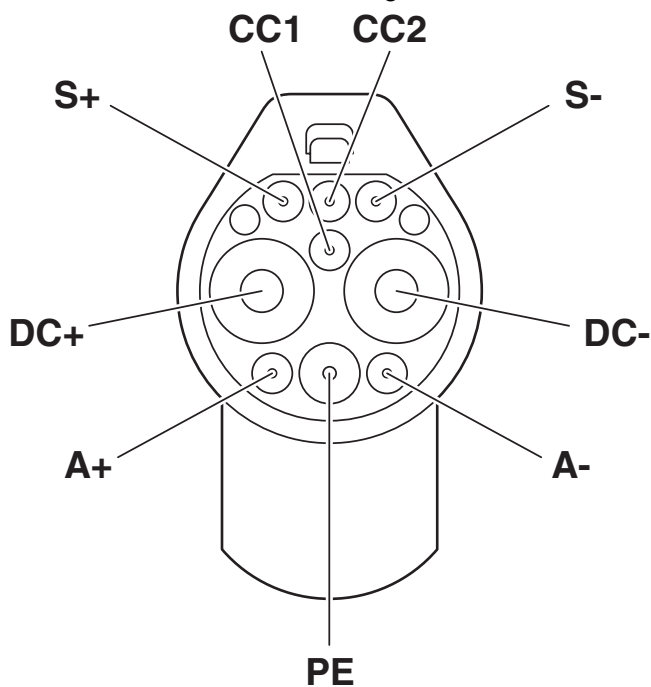

Pin assignment of the Vehicle Connector


EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813

<https://www.phoenixcontact.com/us/products/1623813>

Block diagram

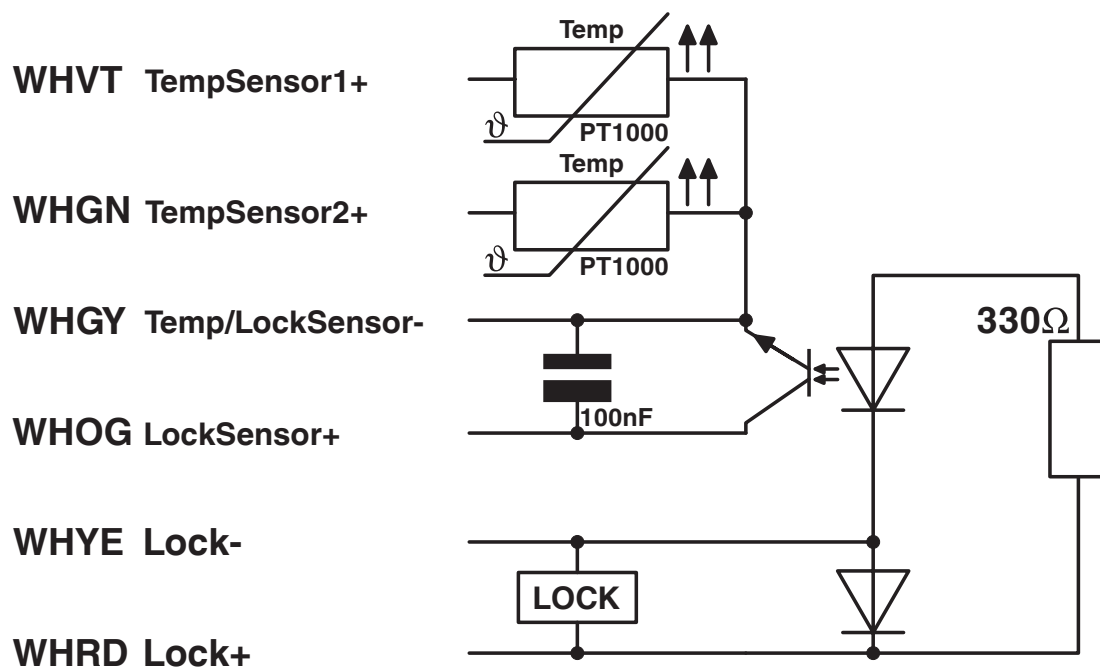

Block diagram GB/T DC

1623813
<https://www.phoenixcontact.com/us/products/1623813>

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	<div>EFUP-10</div> <div>An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.</div>
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813

<https://www.phoenixcontact.com/us/products/1623813>

Accessories

EV-GBDC-PARK-R - Charging connector holder

1623496

<https://www.phoenixcontact.com/us/products/1623496>



CHARX connect, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), GB/T, GB/T 20234.3, Front mounting, housing: black

EV-GBDC-PARK-SW - Charging connector holder

1623497

<https://www.phoenixcontact.com/us/products/1623497>



CHARX connect, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), GB/T, GB/T 20234.3, Front mounting, Park position with pushbutton (N/C contact) to detect the plug state., housing: black

EV-GBM4C-DC125A-4,0M50ESBK00 - DC charging cable



1623813

<https://www.phoenixcontact.com/us/products/1623813>

EV-GBDC-PARK - Charging connector holder

1623770

<https://www.phoenixcontact.com/us/products/1623770>



CHARX connect, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), GB/T, GB/T 20234.3, Front mounting, housing: black

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com