
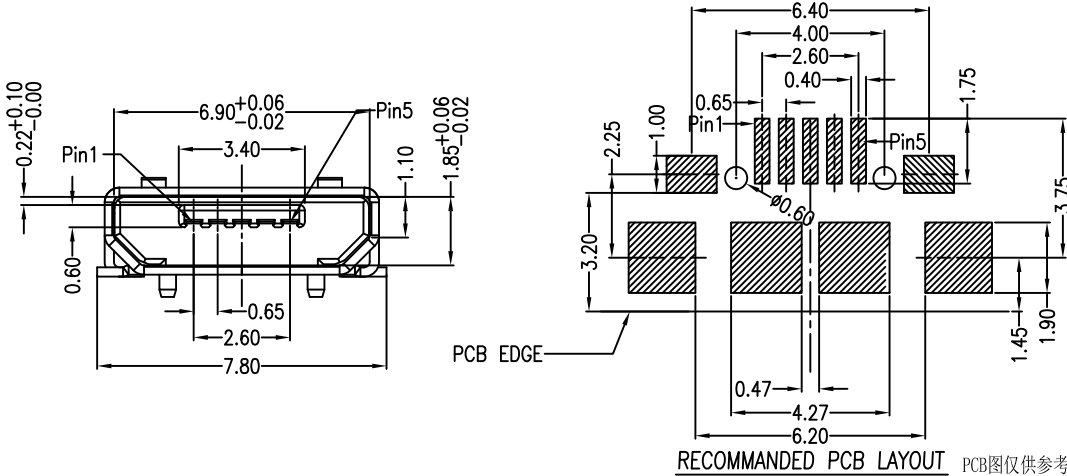


A  
B  
C  
D  
E  
F  
G

12345678910

|      |              |      |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|      |              |      |

A  
B  
C  
D  
E  
F  
G

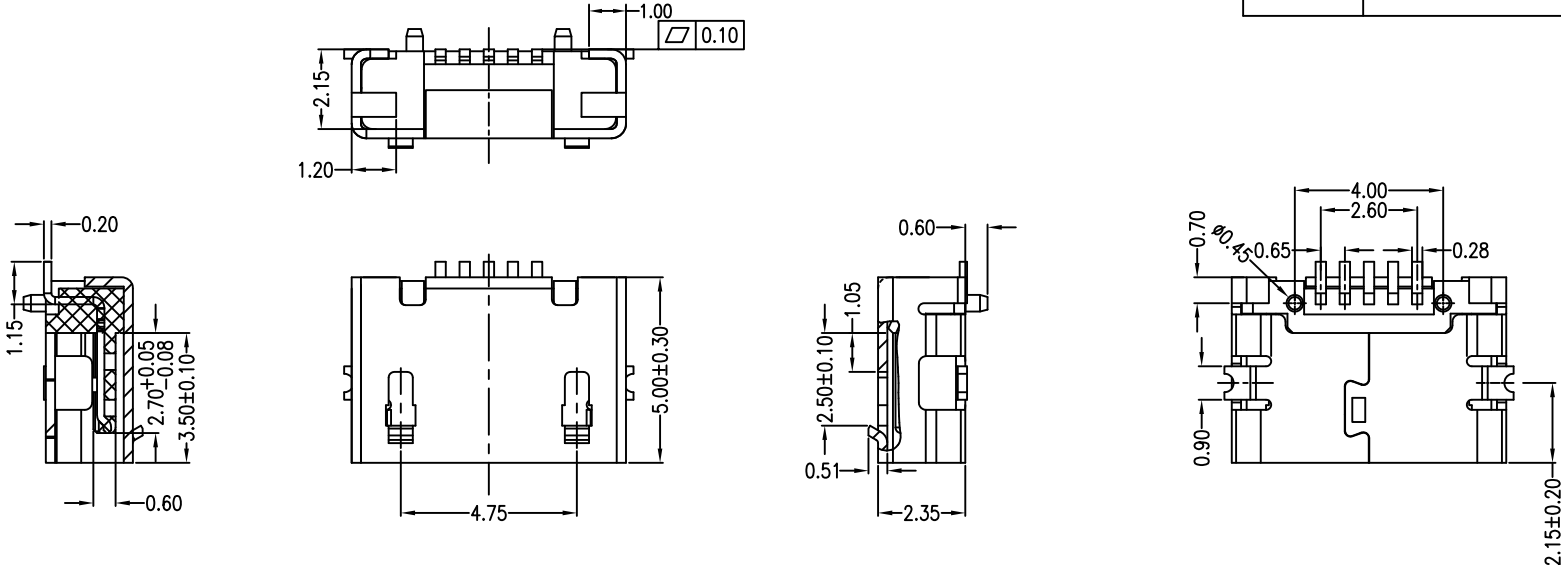

- Note:
1. Material:
    - 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
    - 1.2 Contact: copper alloy,t=0.20mm
    - 1.3 Shell: copper or sus304,t=0.25mm
  2. Specification:
    - 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
    - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
    - 2.3 Contact resistance: 30 mΩ Max.
    - 2.4 Insulation resistance: 100 MΩ Min.
    - 2.5 Total mating force: 3.57 Kg Max.
    - 2.6 Total unmating force: 1.0 Kg Min
    - 2.7 Temperature range: -30°C~80°C

|                                     |       |              |       |               |            |                          |                     |                                   |    |
|-------------------------------------|-------|--------------|-------|---------------|------------|--------------------------|---------------------|-----------------------------------|----|
| 产品图<br>PRODUCT CHART DWG            |       | 深圳市精拓金电子有限公司 |       |               |            |                          |                     |                                   |    |
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       | 单位<br>UNITS  | MM    | 制图<br>DRAWING | 尹先华        | 制图料号<br>PRODUCT PART NO. | 920-D62A2021S10101  |                                   |    |
| X.                                  | ±0.30 | X.           | ±5.°  | 比例<br>SCALE   | 审核<br>CHKD | 郭治富                      | 产品名称<br>PRODUCT NO. | MICRO 5S B型两脚贴板无边有柱加焊脚<br>端子加长0.4 |    |
| .X                                  | ±0.25 | .X           | ±2.°  | 日期<br>DATE    | 核准<br>APPD | 黄国荣                      | 角法<br>VIEW          | 版本<br>VER                         | AO |
| .XX                                 | ±0.15 | .XX          | ±1.°  |               |            |                          |                     |                                   |    |
| .XXX                                | ±0.10 | .XXX         | ±0.5° |               |            |                          |                     |                                   |    |

12345678910