
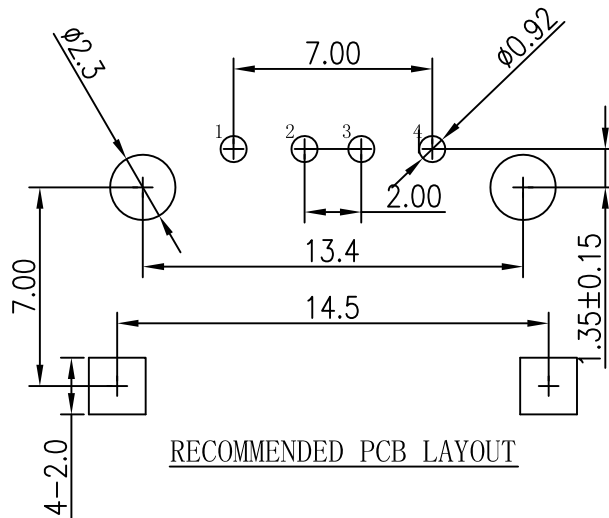
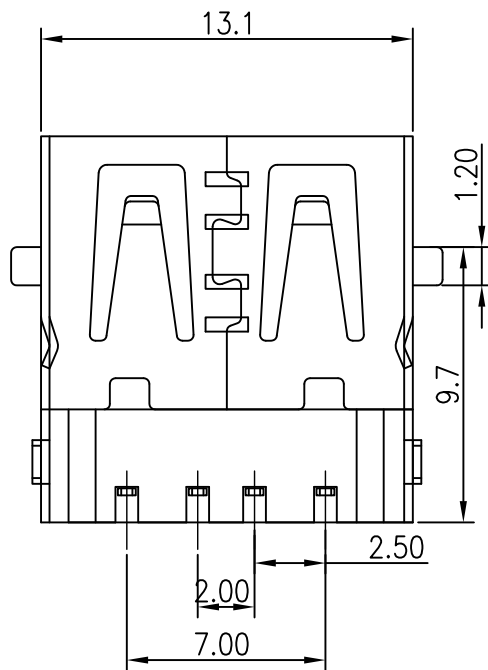


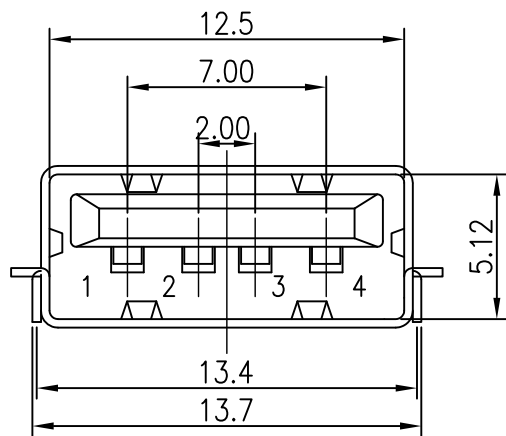

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料:Material:

- 塑胶:Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT White/Black
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy SPCC

电镀:Finish:

- 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳:Shell:
Nickel Plating

产品图				深圳市精拓金电子有限公司						
PRODUCT CHART DWG										
公差一览表										
TOLERANCE UNLESS OTHERWISE										
X.	±0.25	X.	±5.°	单位	MM	制图	尹先华	制图料号	905-761A2022S10205	
.X	±0.20	.X	±2.°	UNITS		DRAWING		PRODUCT PART NO.		
.XX	±0.15	.XX	±1.°	比例	1:1	审核	郭治富	产品名称	AF沉板四脚前贴后插13.6无边铁壳LCP黑胶DIP	
.XXX	±0.10	.XXX	±0.5°	SCALE		核准	黄国荣	PRODUCT NO.		
				日期	2021-04-12	核准	黄国荣	角法	版本	AD
				DATE		APPD		VIEW	VER	