
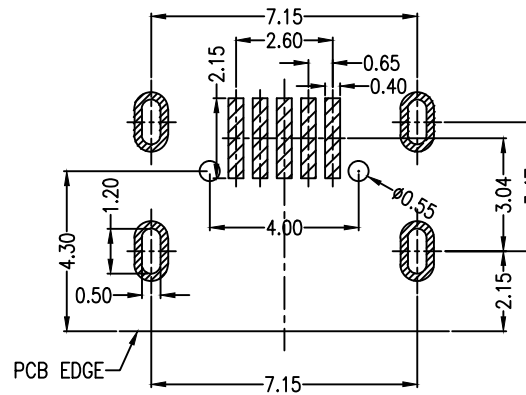
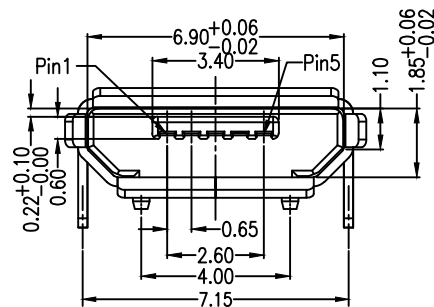
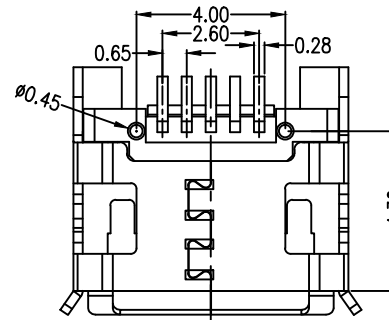
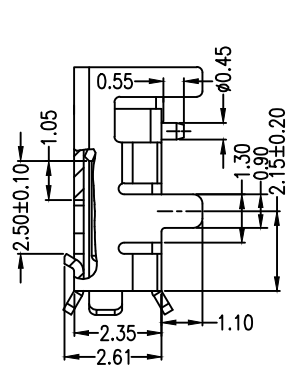
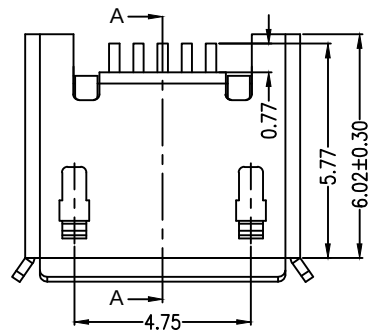



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

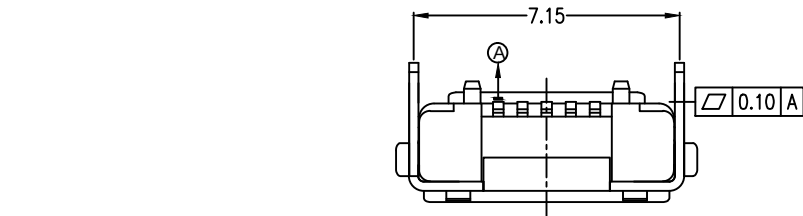

RECOMMENDED PCB LAYOUT

PCB图仅供参考

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy or SUS,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C

PART NO: 920-A52A2021S10108		MATERIAL: SEE NOTE		深圳市精拓金电子有限公司	
MODEL NO: XX		FINISH: SEE NOTE			
UNIT: MM	SIZE: A4	COLOR: SEE NOTE		TITLE: MICRO/5P-F B型四脚插板有边7.2脚长1.1有柱端子 加长0.75SMT	
TOLERANCE UNSPECIFIED .x ±0.15 .xx ±0.10 .xxx ±0.05 Ang ±1°		DR: xiayouhong		DWG NO: A301	
		CHK:		REV: A	
		APP:		SCALE: 5:1	DATE: 2012.05.21

