

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	CREATED	09JUL13	S.F	I.Y
	A1	ECN-24-268036	30MAY24	H.S	J.Z
	A2	ECN-24-279365	12AUG24	T.J	J.Z

D

C

B







A

D



C

B

A

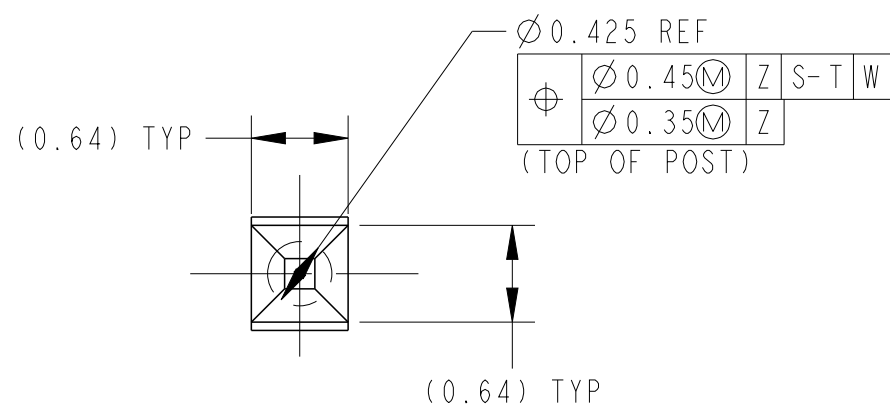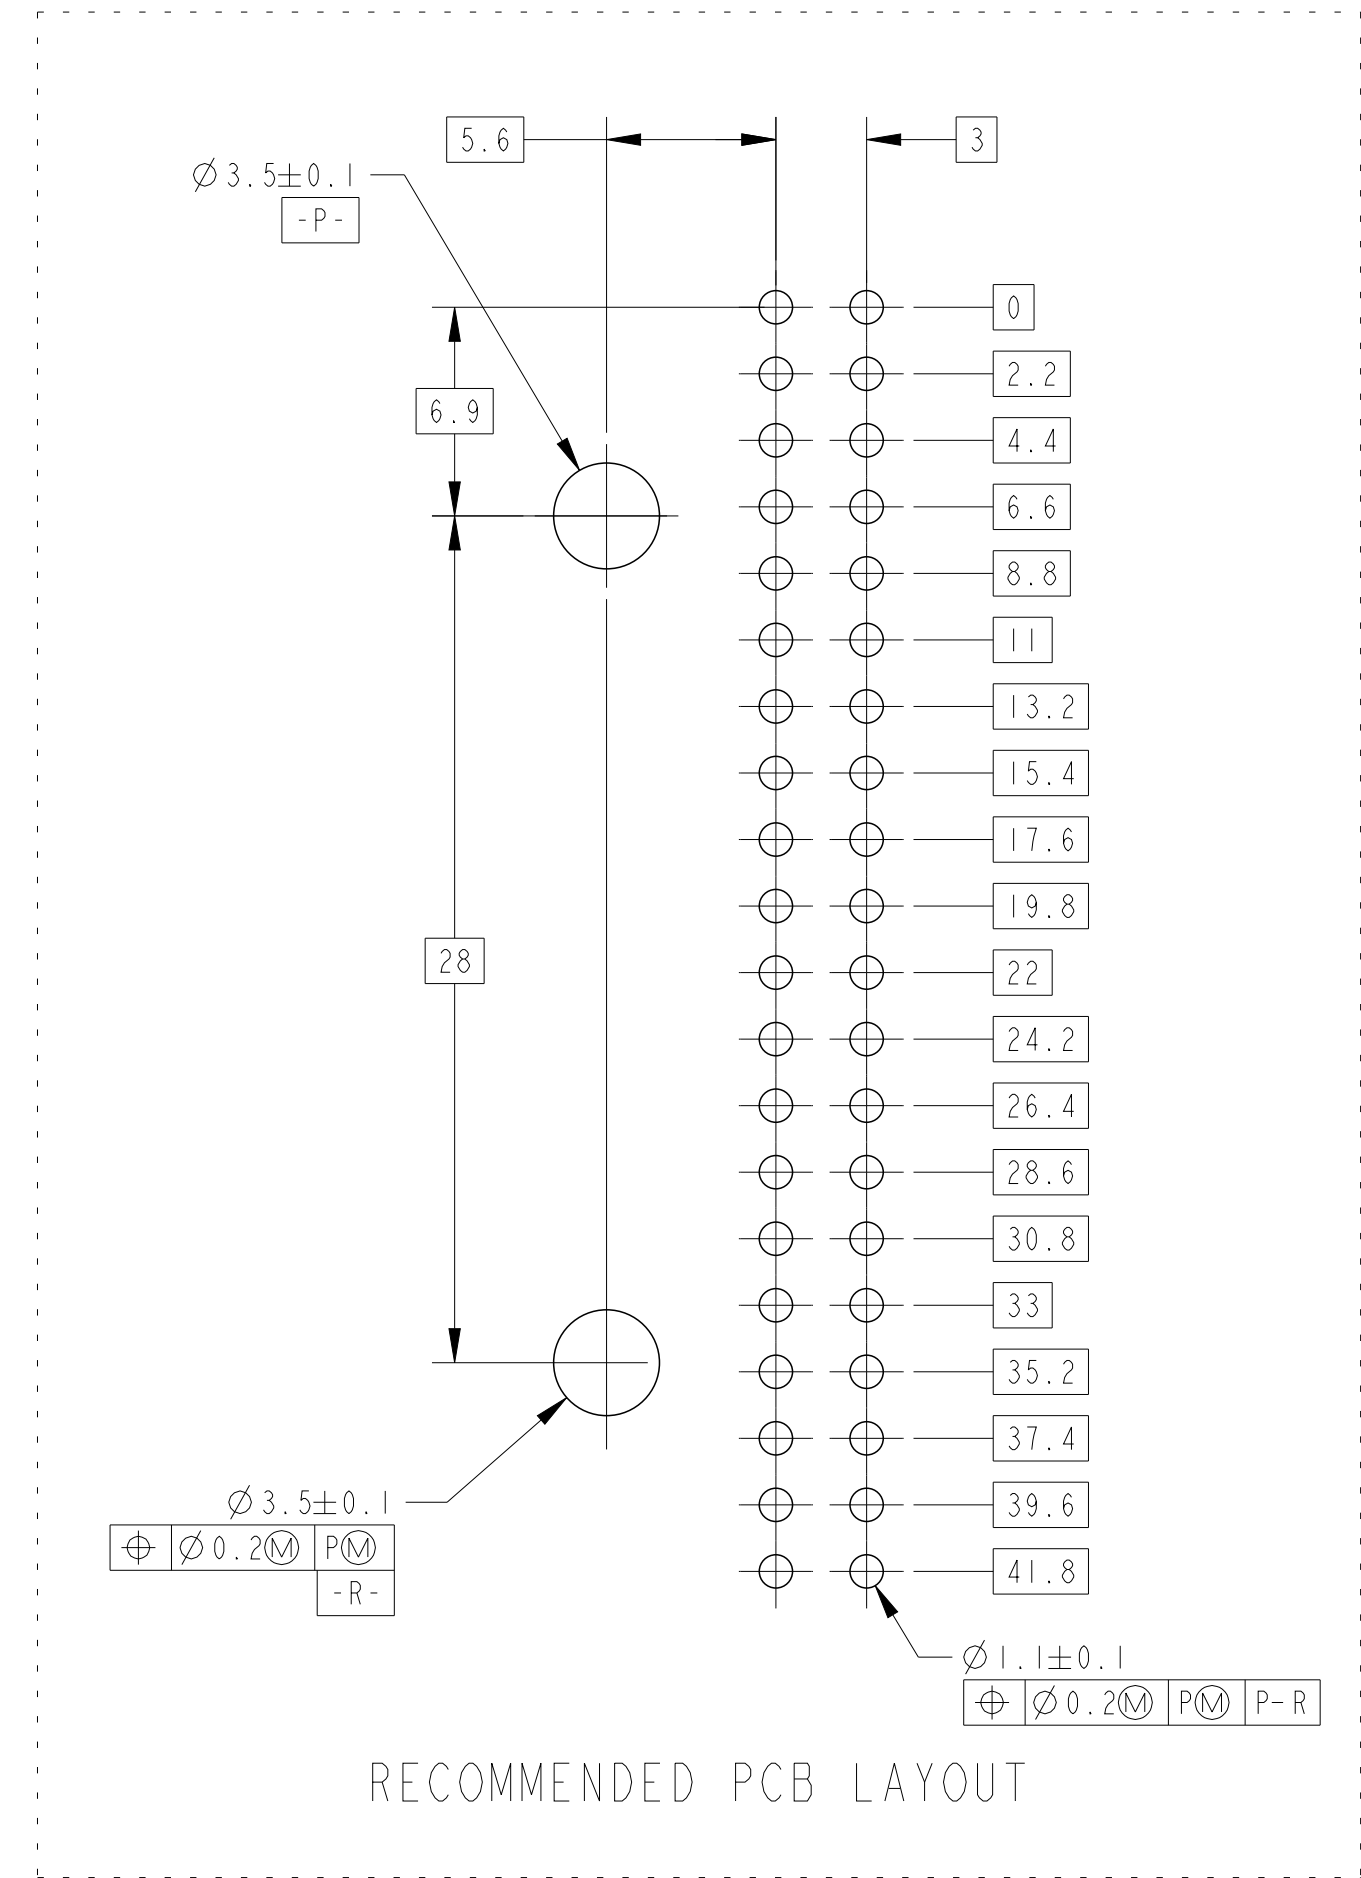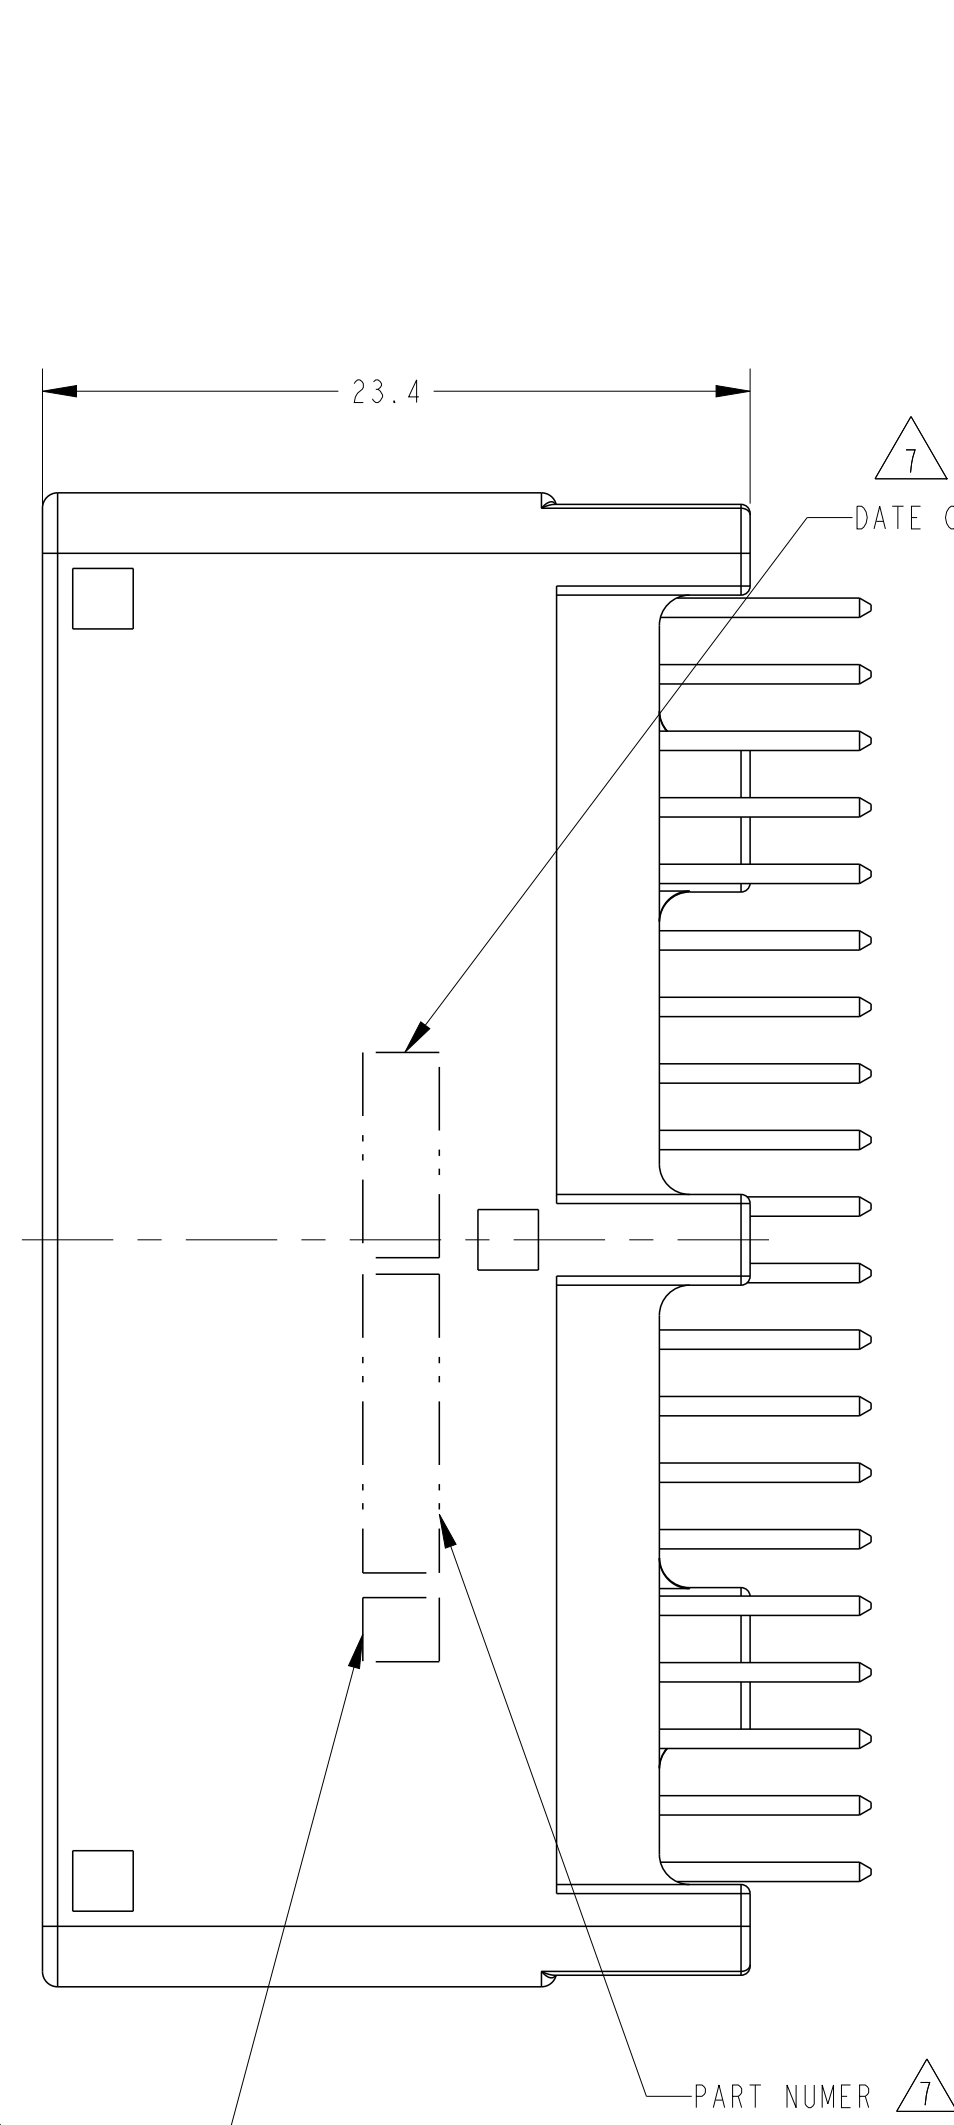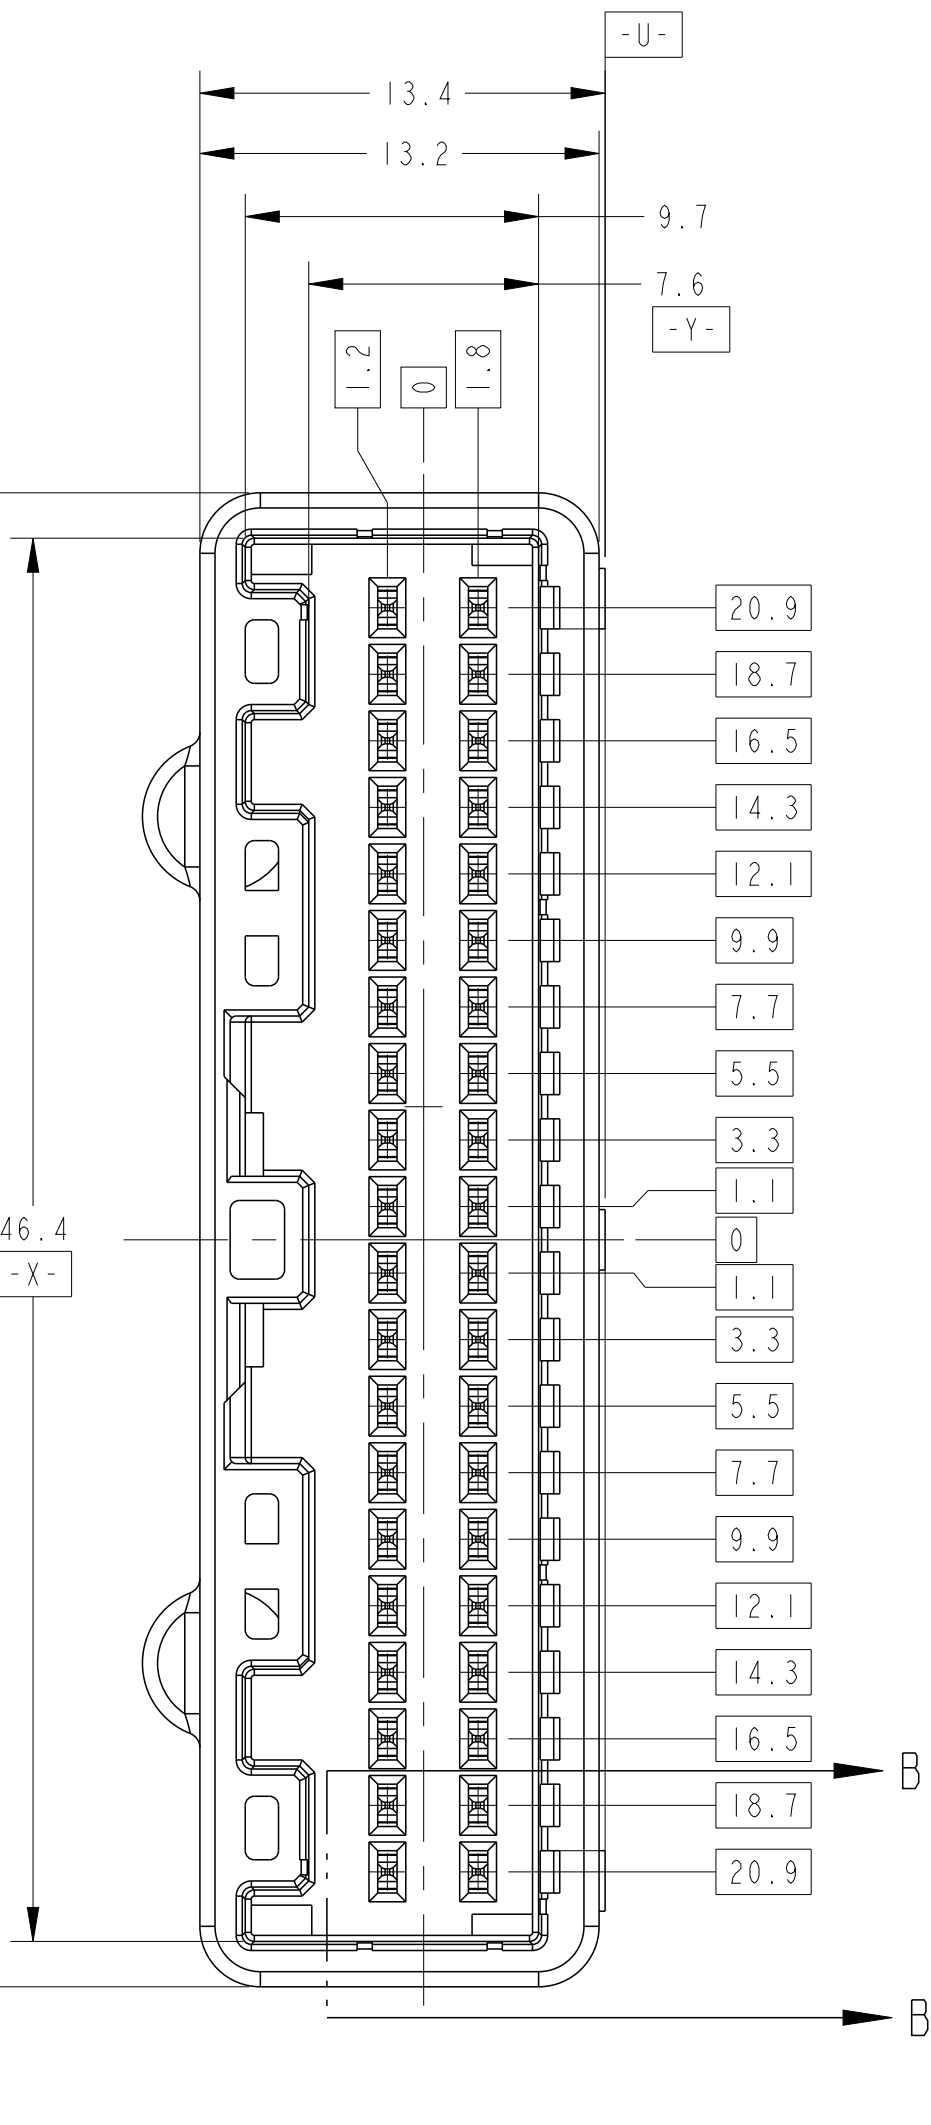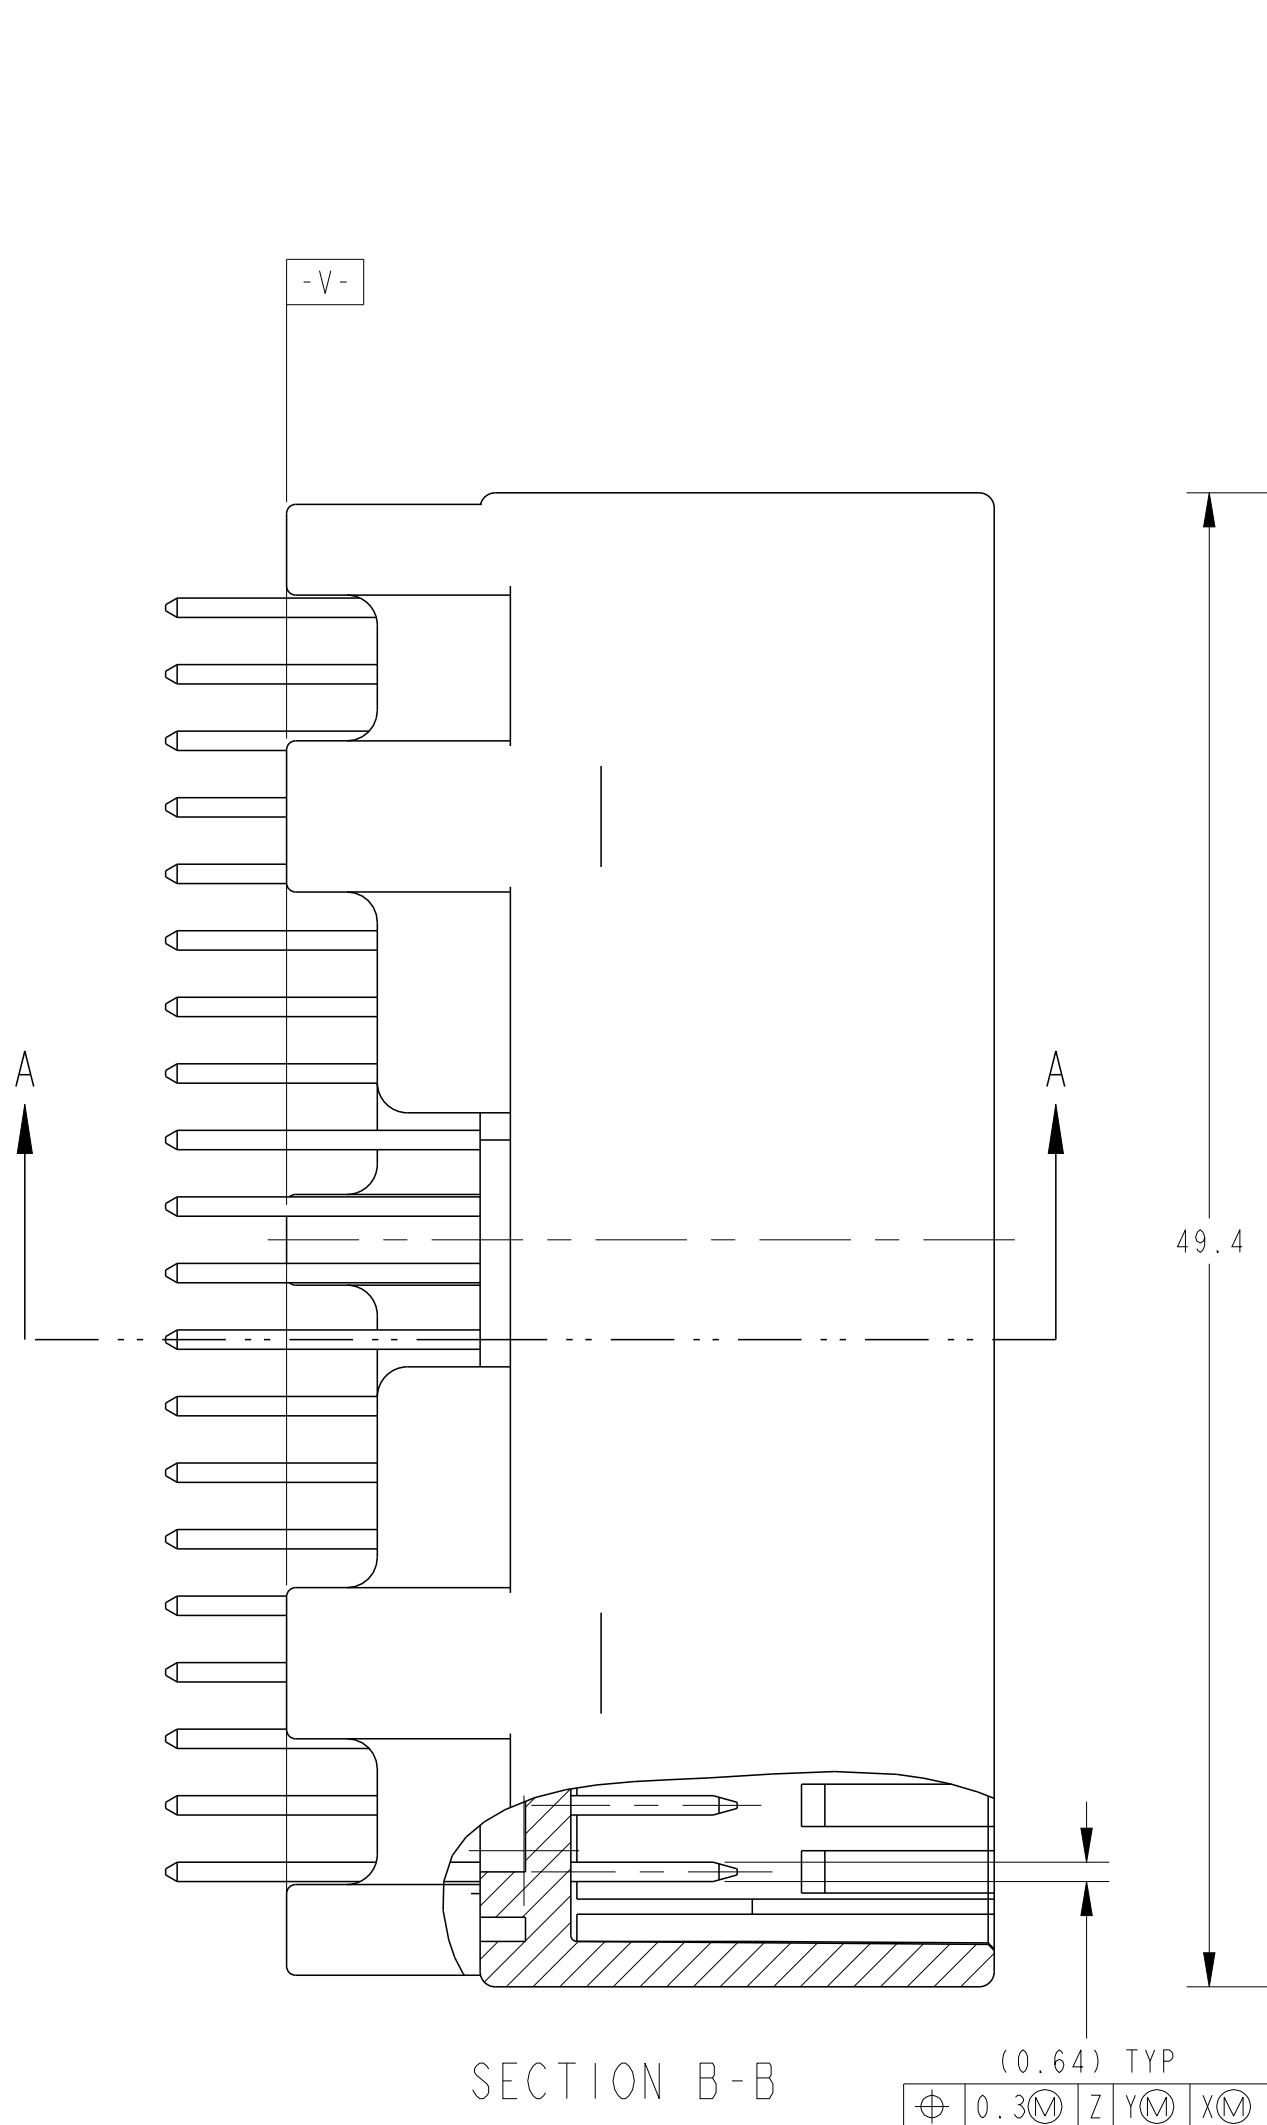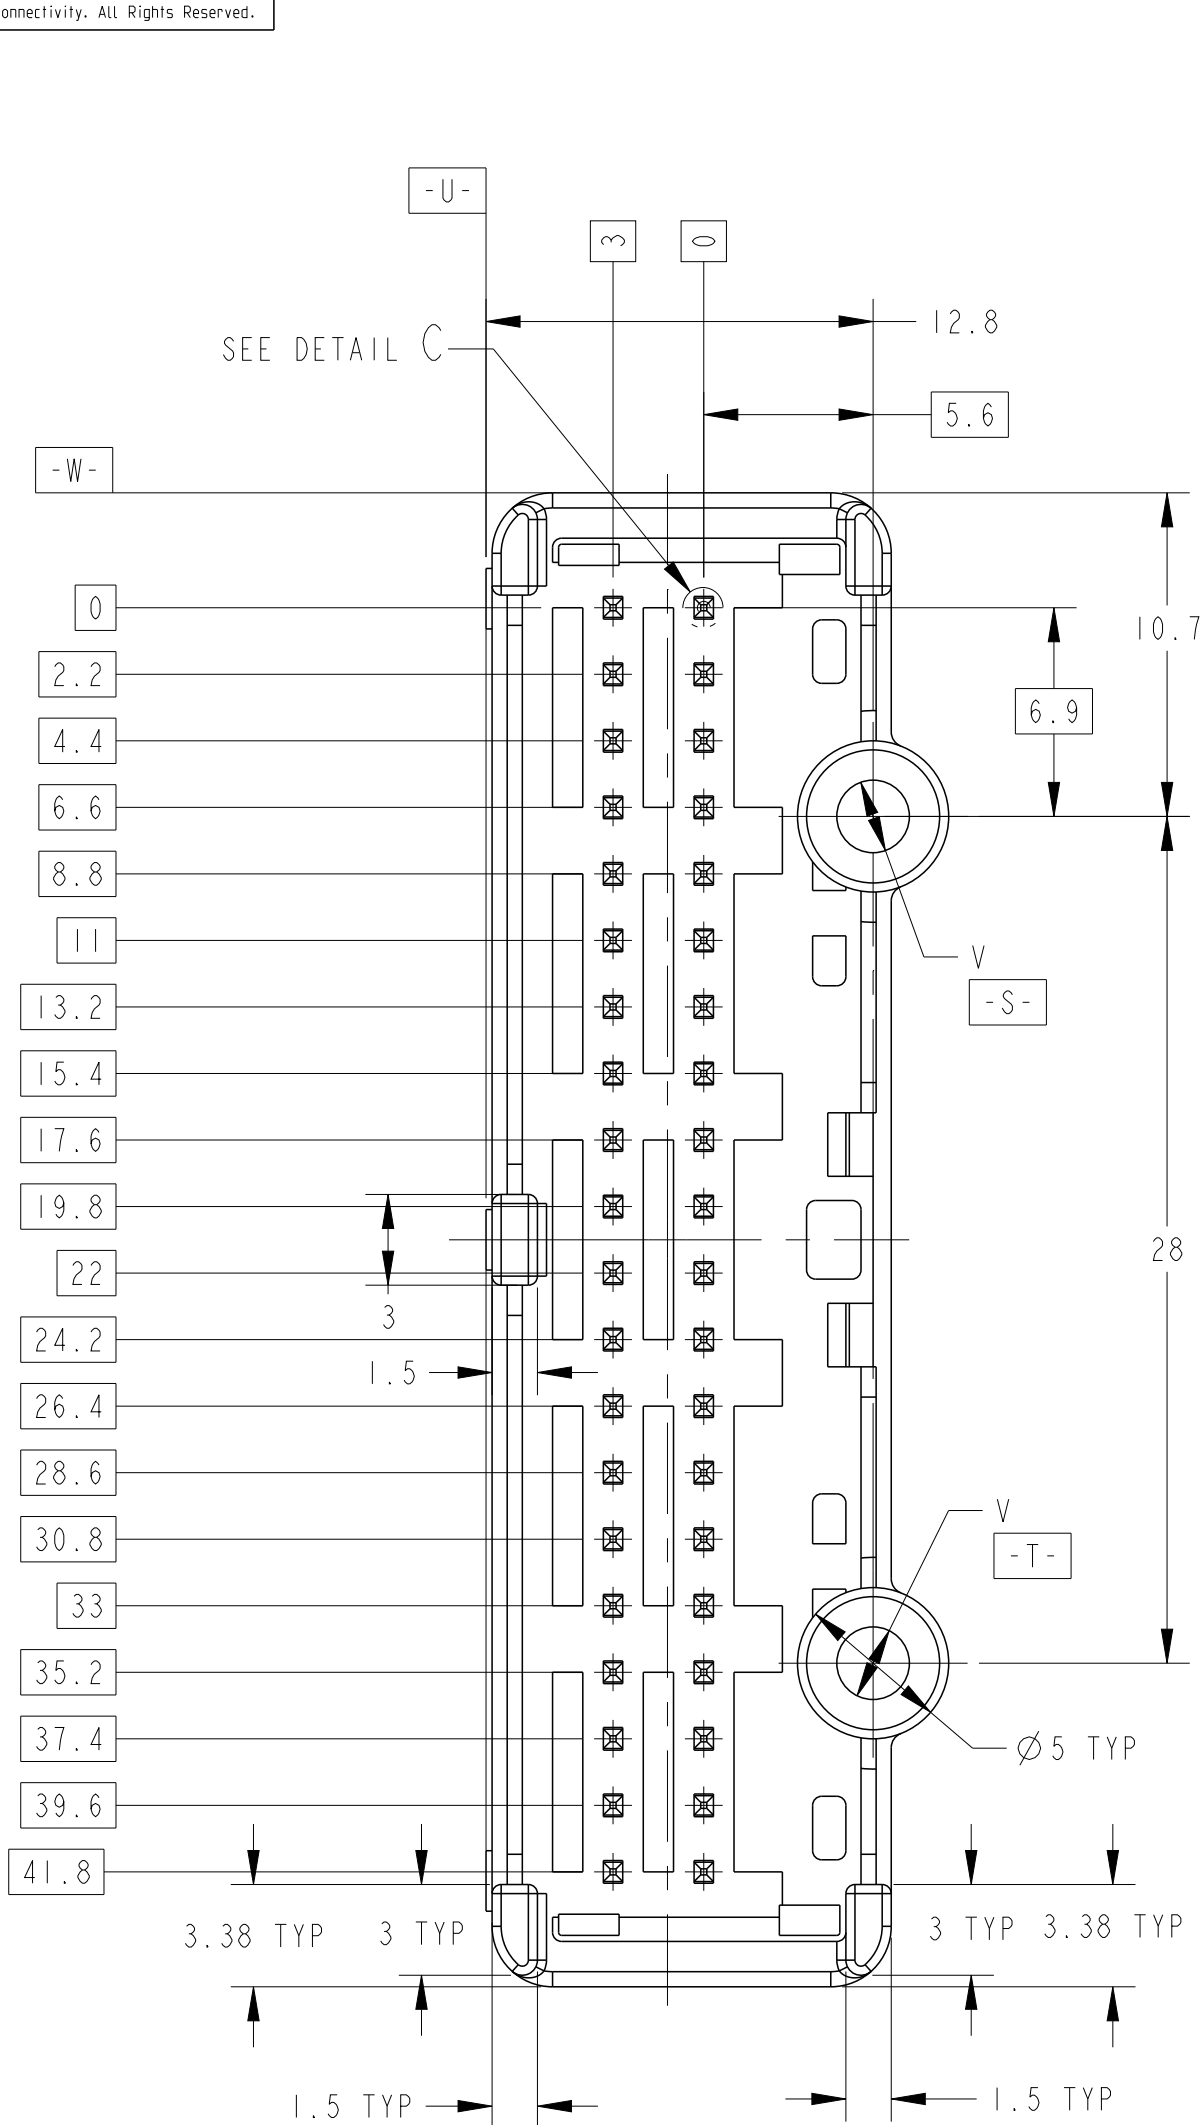

DETAIL C
SCALE 20:1

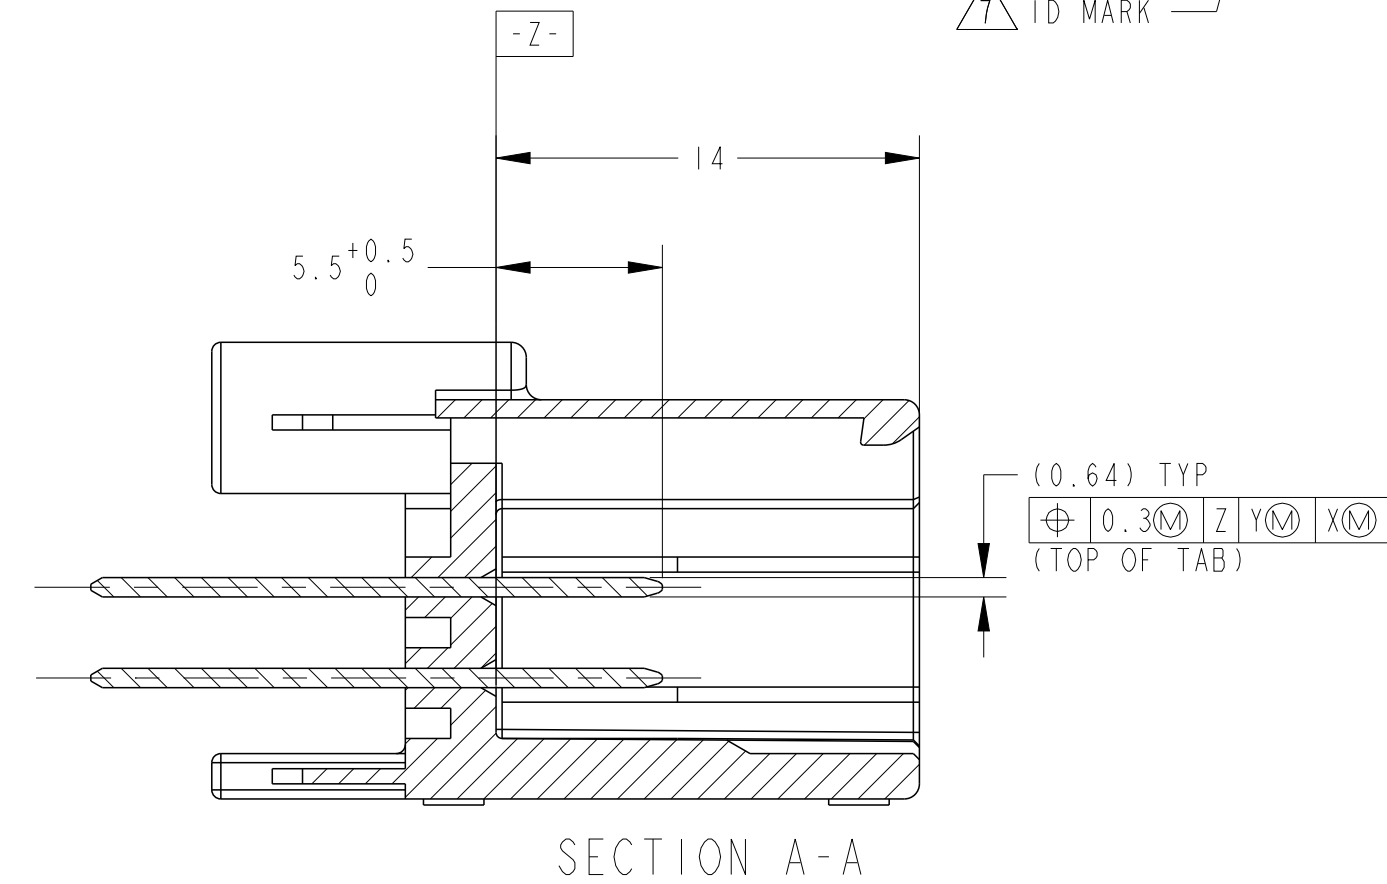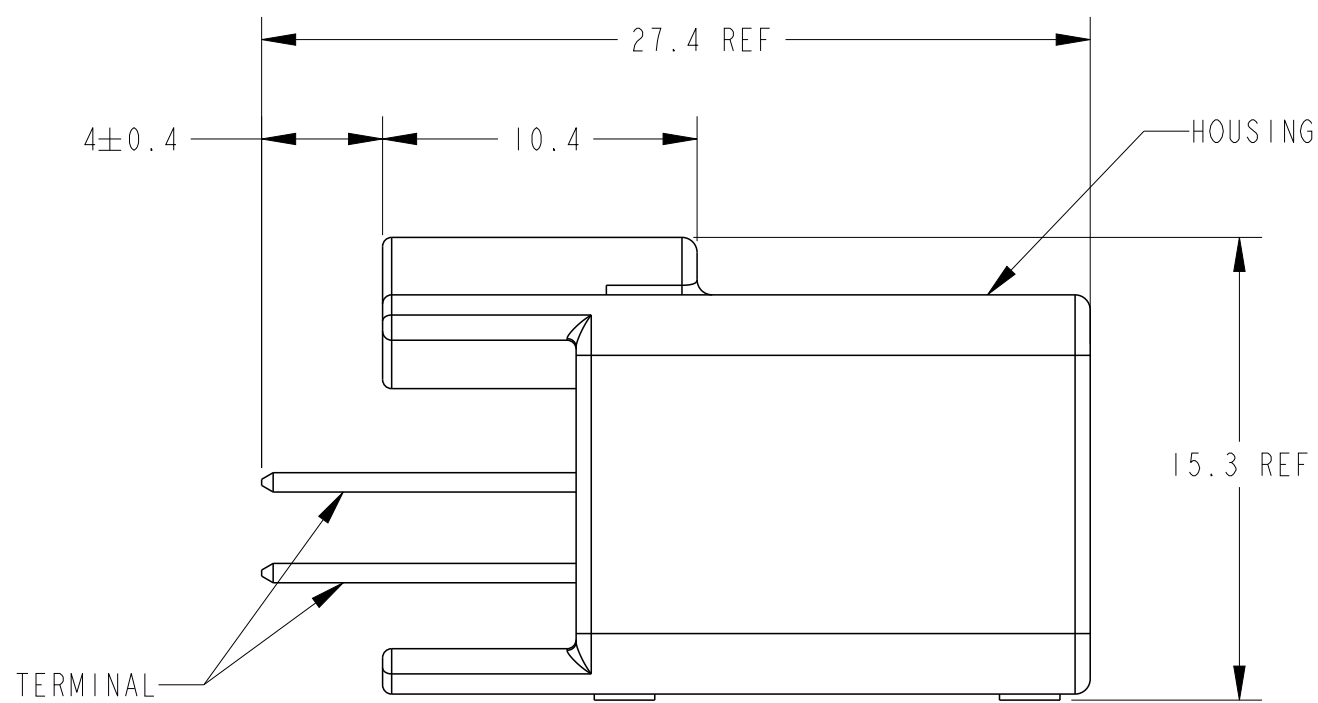

- 1.MATING CONNECTOR PART NUMBER; SEE TABLE-1.
TO BE MATED SMOOTHLY WITH THE PLUG HOUSING ASSEMBLY.
- 2.RECOMMENDED SCREW : PAN-HEADED,
TYPE 2 TAPPING SCREW OF DIA 3mm X LENGTH 6mm
REFER TO JIS B1115,B1122
- 3.RECOMMENDED FASTENING TORQUE FOR SCREW : 0.392Nm
- 4.INSTRUCTION SHEET NO; 411-5928
- 5.APPLIED TERMINAL : SEE TABLE-2.
- 6.INNER PACKING: PLASTIC TRAY

A2

T


LASER MARKING.

TABLE-1

POS.	TYPE	PLUG HOUSING PART No.
40	CRIMP	1318389
40	IDC	1318691 1318695

TABLE-2

		TERMINAL No.	APPLICABLE WIRE RANGE(FEMALE)
SIGNAL	TIN	1123343-1	AVSS/CAVS/CAVUS 0.3-0.5mm ² AVSSH-f 0.3-0.5mm ²

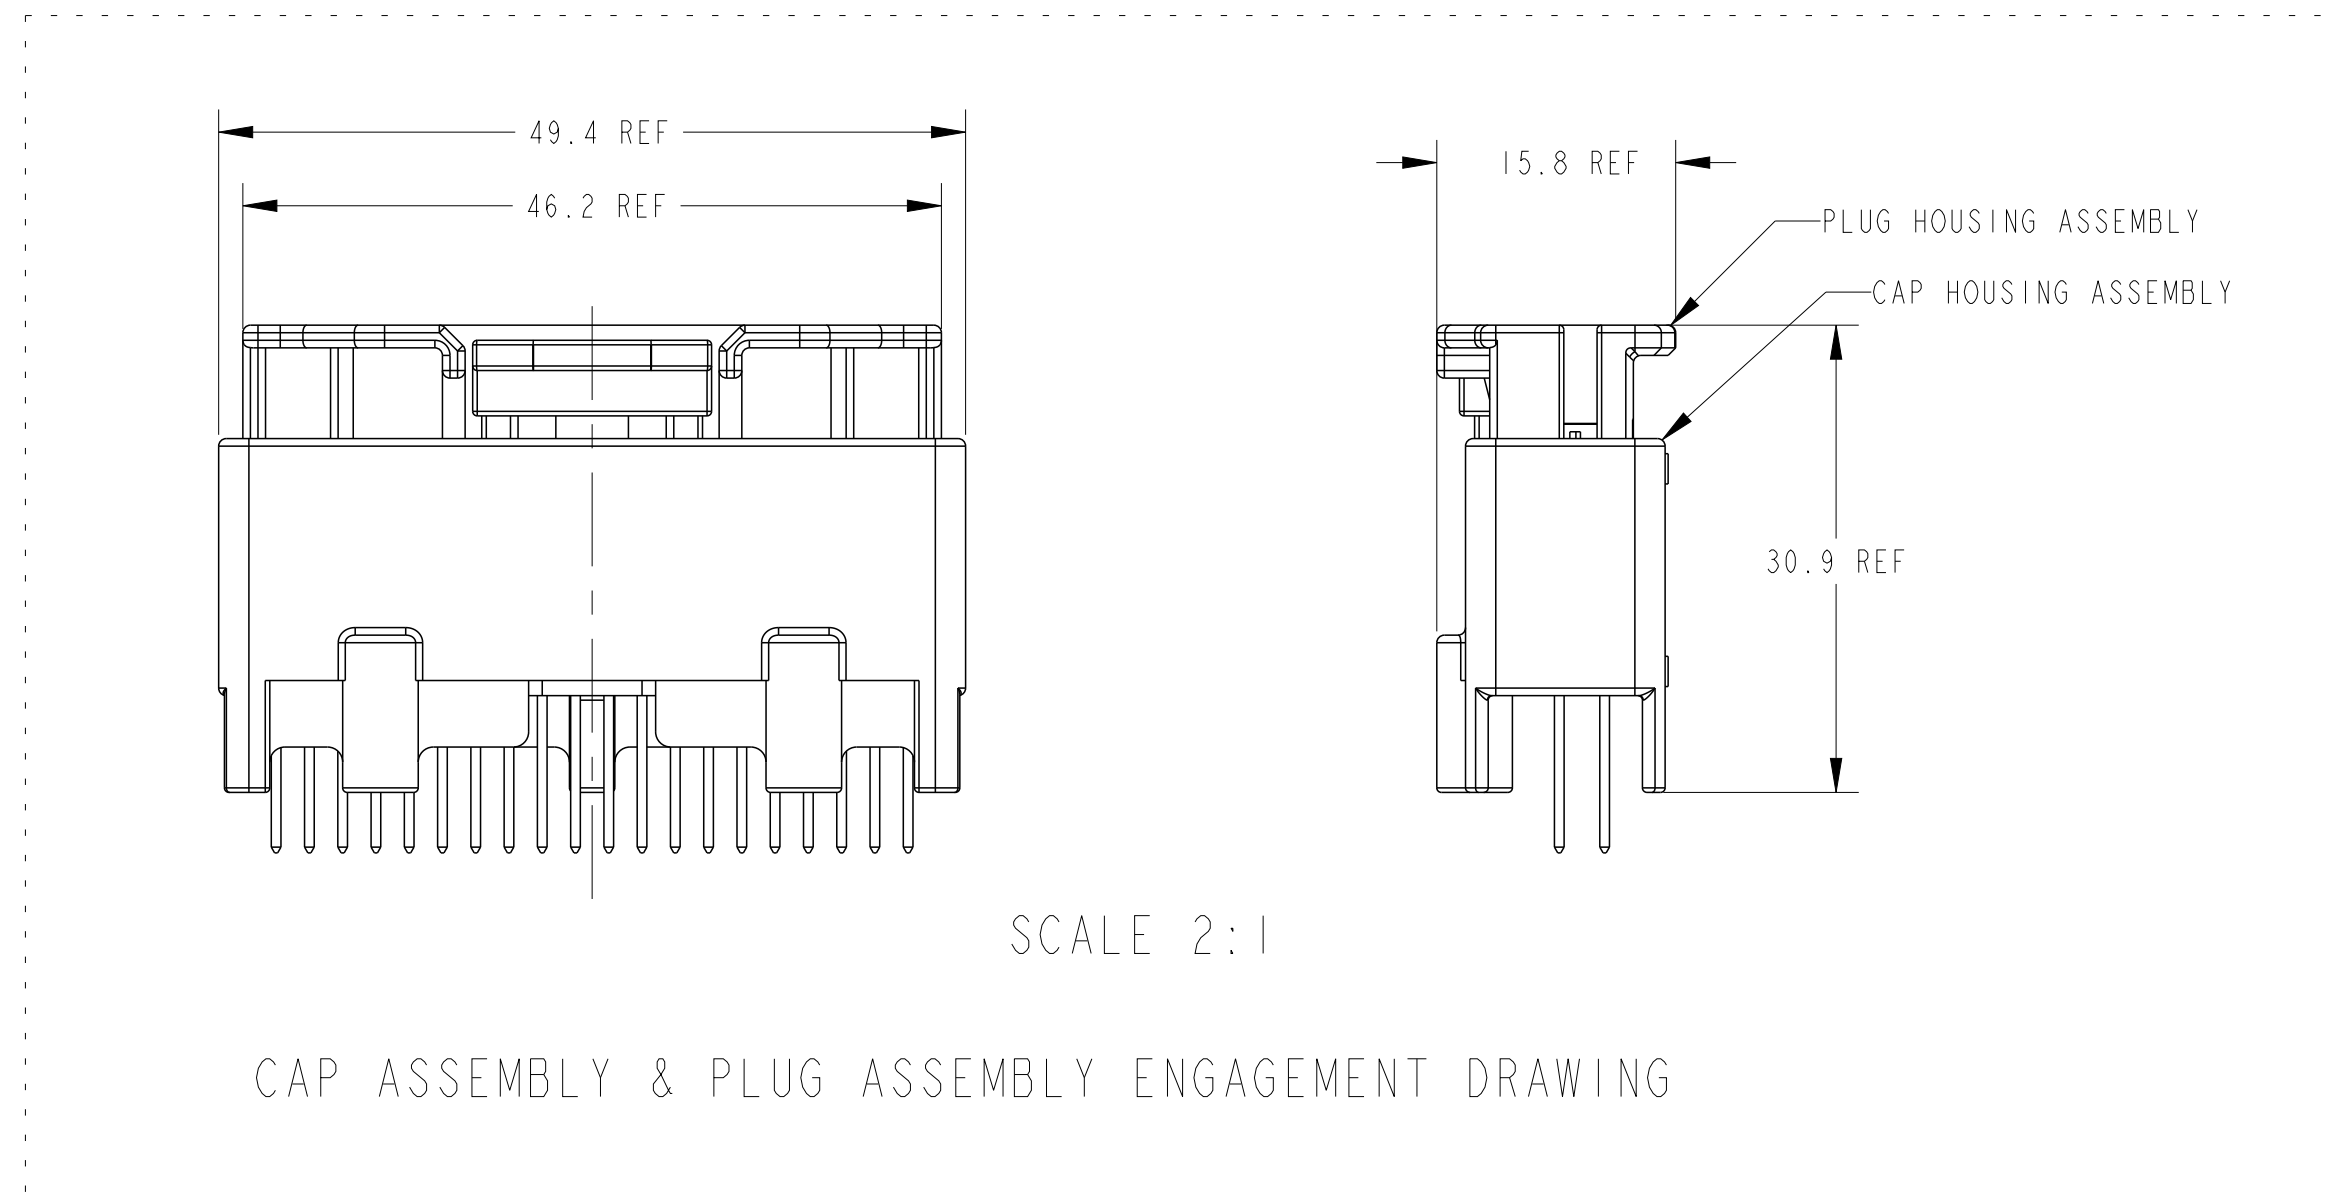

SCALE 2:1

CAP ASSEMBLY & PLUG ASSEMBLY ENGAGEMENT DRAWING

Ø2.4	PRE-TIN x 40		PBT GF30	NATURAL	2209908-1
V	SOLDERING SIDE	CONTACT SIDE	MATERIAL	COLOR	PART NUMBER
	CONTACT FINISH		HOUSING		
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN S.FAN 03JUL2013 CHK E.JIANG 09JUL2013 APVD J.YIN 09JUL2013		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3		NAME	
		PRODUCT SPEC		A2	
		108-5668			
		APPLICATION SPEC			
		114-5250			
MATERIAL		FINISH		SIZE	CAGE CODE
-		SEE TABLE		DRAWING NO	
-		-		00779	
		CUSTOMER DRAWING		C=2209908	
				RESTRICTED TO	
				-	
				SCALE 4:1	
				SHEET 1 OF 1	
				REV A2	