

13 12 11 10 9 8 7 6 5 4 3 2 1

MATERIALS AND FINISHES:

BODY ZINC ALLOY
PLATED NICKEL

HOUSING POLYESTER BUTYLENE TEREPHTHALATE
COLOR WHITE

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94 V-2)





SOLDER TAIL COPPER COVERED STEEL WIRE
PLATED TIN

BOARD LOCK CLIP PHOSPHOR BRONZE
PLATED TIN



WASHER PHOSPHOR BRONZE
PLATED NICKEL

NUT BRASS
PLATED NICKEL

PACKAGING BY TRAY

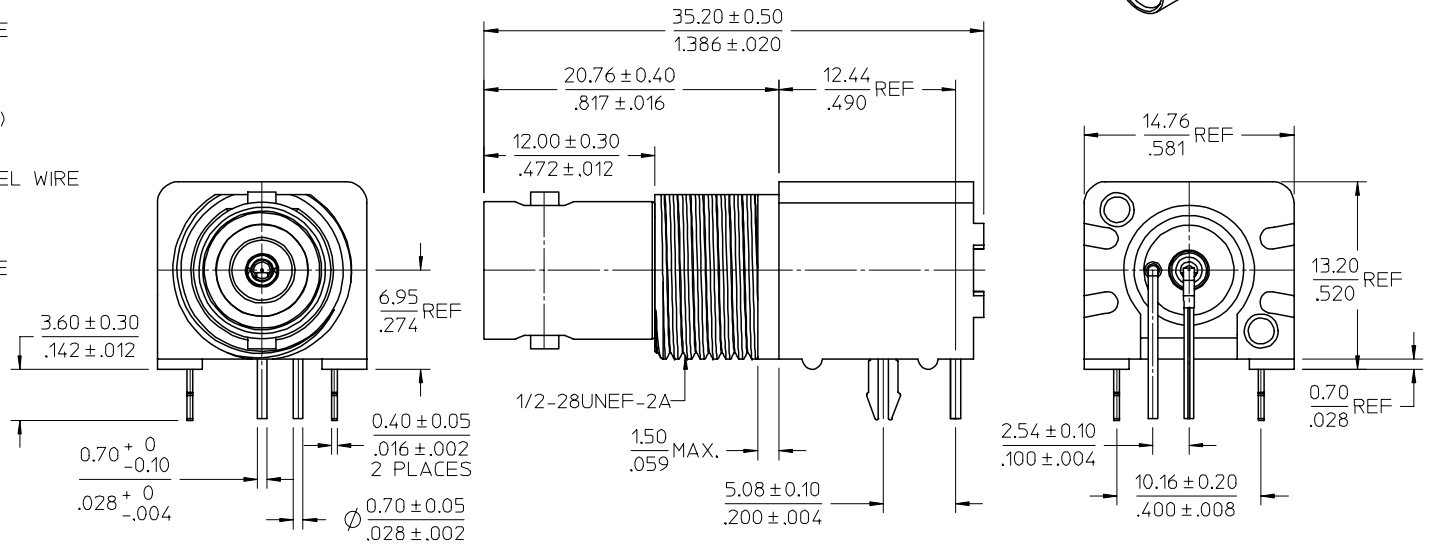

RECOMMENDED MOUNTING HOLE
RECOMMENDED MOUNTING
TORQUE : 5.0 IN-LBS MAX.
PANEL THICKNESS : 5.5 MM MAX.

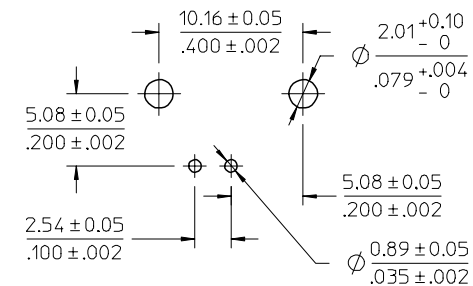

PCB HOLE CONFIGURATION

PS-73598-0050	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

NEW RELEASED EDR07-002 2007-0037 2006/08/09 DRAWN: JTSAO CHKD: 2006/08/10 APPR: MHIANG 2006/08/11	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE BNC JACK, R/A BLKHD RECEPTACLE, PCB 50 OHMS BNC-J/PCB	MATERIAL NO. 73101-0760	DOCUMENT NO. SD-73101-076	SHEET NO. 1 OF 1
A	B	C	D	E	F	G	H	I	J