


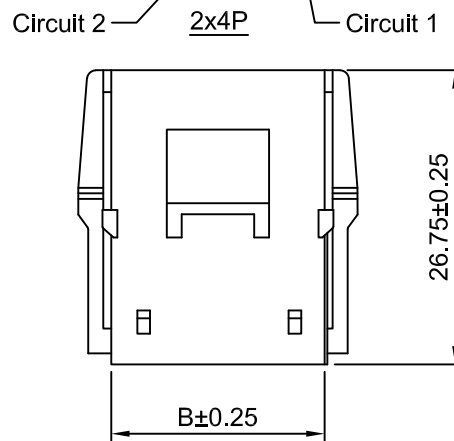
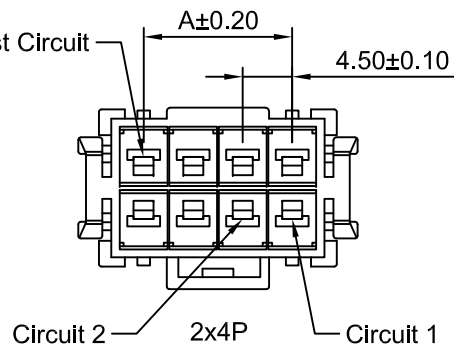
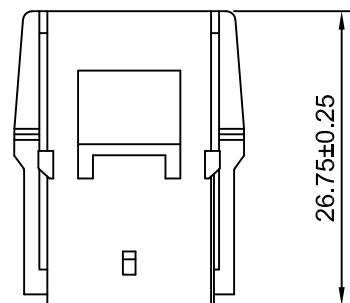
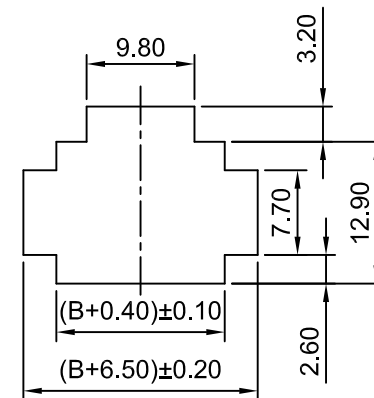
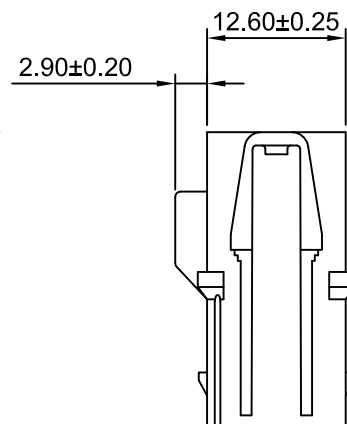


2x3P

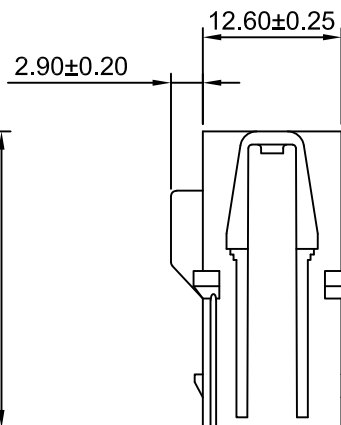

2x2P



Panel Hole Layout
Thickness:0.90~1.30

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4501HM-2x2P	4.50	10.30
C4501HM-2x3P	9.00	14.80
C4501HM-2x4P	13.50	19.30

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit	Scale	Sheet	4.50mm PITCH HOUSING	
mm	1.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO. C4501HM-2xXP	
A1	CHANGE THE DRAWING	2021.12.22		
A0	NEW RELEASE	2015.04.15		
REV	DESCRIPTION	DATE	REV A1	