





Part Number : [511460800](#)
Product Description : 1.25mm Pitch
PanelMate Wire-to-Board Receptacle Housing,
Ultra Low Profile, 8 Circuits, Natural
Series Number : 51146
Status : New Business Not Supported
Product Category : Connector Housings

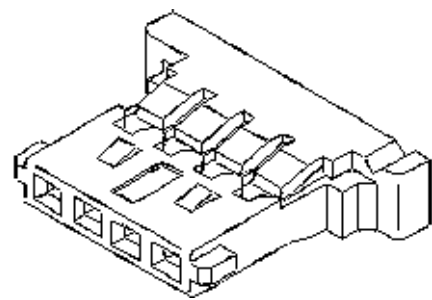

Documents & Resources

Product Environment Compliance

Compliance

| | |
|--------------------|--|
| GADSL/IMDS | Not Relevant |
| China RoHS |  |
| EU ELV | Not Relevant |
| Low-Halogen Status | Not Low-Halogen per IEC 61249-2-21 |
| REACH SVHC | Not Contained per D(2024)4144-DC (27 June 2024) |
| EU RoHS | Compliant per EU 2015/863 |

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

| | |
|--------------|---|
| Status | New Business Not Supported |
| Category | Connector Housings |
| Series | 51146 |
| Description | 1.25mm Pitch PanelMate Wire-to-Board Receptacle Housing, Ultra Low Profile, 8 Circuits, Natural |
| Application | Power, Wire-to-Board |
| Product Name | PanelMate |
| UPC | 800754237505 |

Agency

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

Physical

| | |
|-------------------------------|---------------|
| Circuits (maximum) | 8 |
| Color - Resin | Natural |
| Flammability | 94V-0 |
| Gender | Receptacle |
| Glow-Wire Capable | No |
| Net Weight | 72.000/mg |
| Number of Rows | 1 |
| Packaging Type | Bag |
| Panel Mount | No |
| Pitch - Mating Interface | 1.25mm |
| Temperature Range - Operating | -40° to +85°C |