



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	EI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

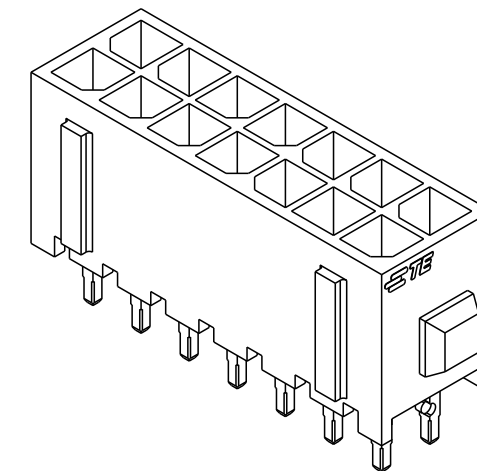

SECTION Z-Z

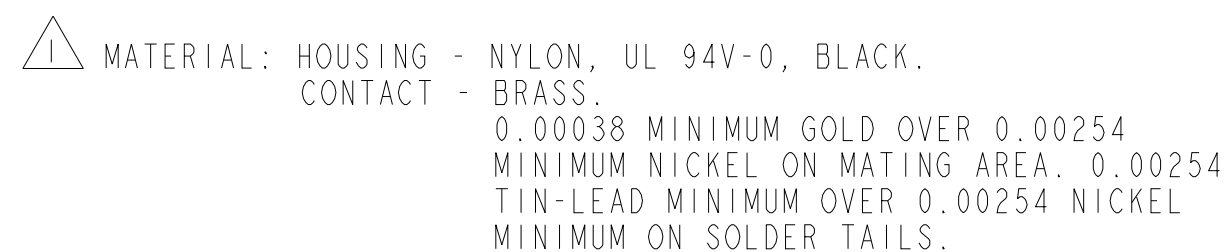

-  MAXIMUM INSERTION 20 LBS.
 RECOMMENDED BOARD THICKNESS 1.57.

4 MATERIAL: HOUSING - NYLON, UL 94V-0, BLACK.
CONTACT - BRASS.
0.00038 MINIMUM GOLD OVER 0.00254
MINIMUM NICKEL ON MATING AREA. 0.00254
MATTE TIN MINIMUM OVER 0.00254 NICKEL
MINIMUM ON SOLDER TAILS.

794631

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 16AUG99		 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK K. COBLE 16AUG99			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 16AUG99		NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 15 GOLD, DUAL ROW, MICRO MATE-N-LOK TM	
		PRODUCT SPEC -			
0 PLC ±- 1 PLC ±- 2 PLC ±0.20 [0.08] 3 PLC ±- 4 PLC ±- ANGLES ±-		APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO A2 00779 C-794631	
MATERIAL 		WEIGHT -		RESTRICTED TO -	
FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 1 REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-794631-4](#)