

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	30AUG2017	YC	CW

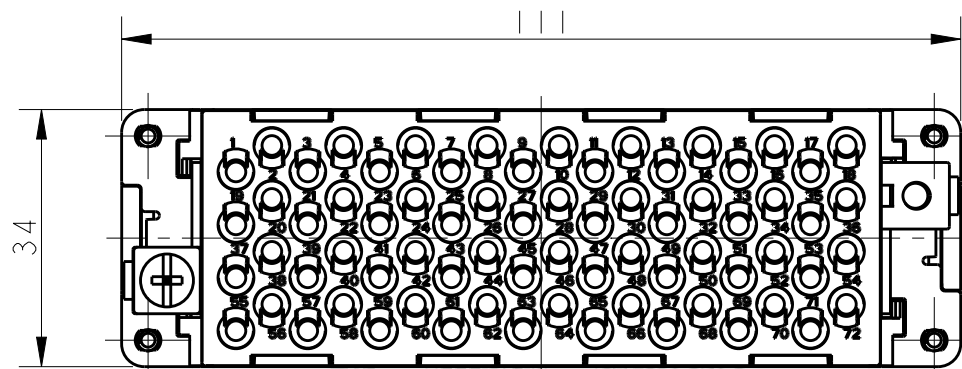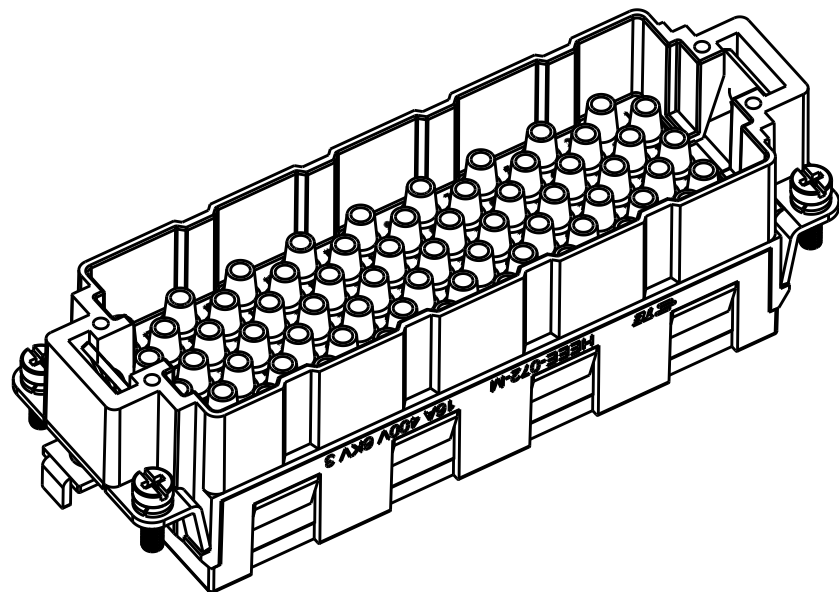

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2N.m
M4 螺丝, 推荐拧紧力矩1.2N.m

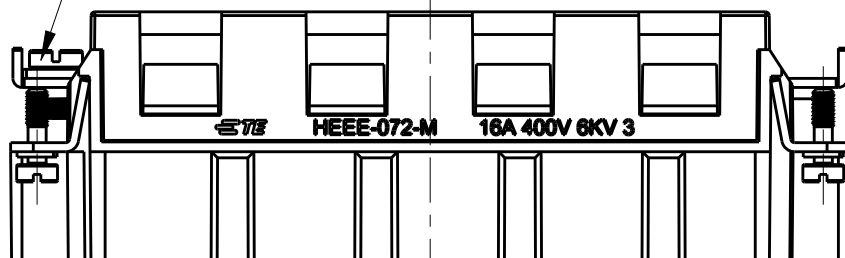

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5N.m
4X M3 螺丝, 推荐拧紧力矩0.5N.m

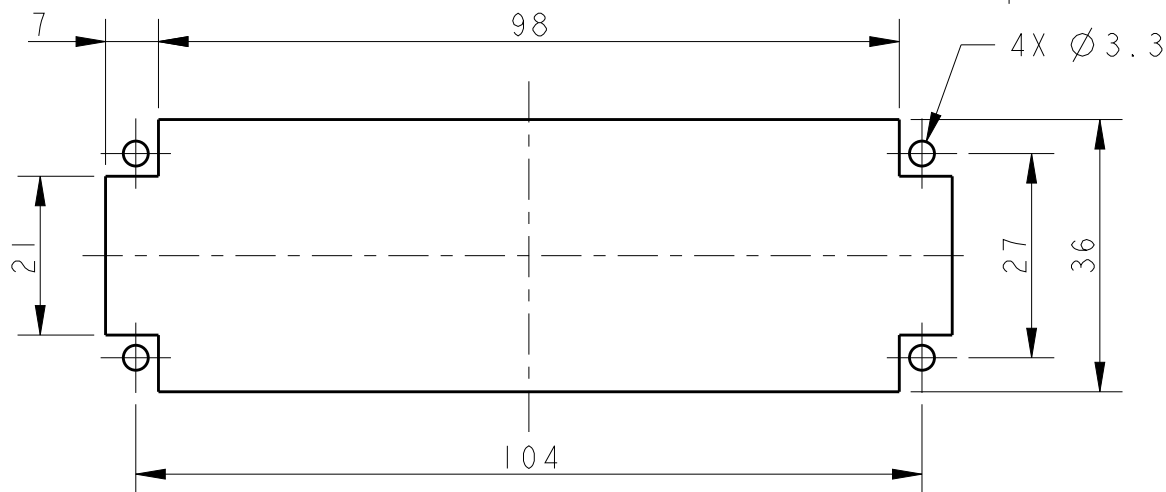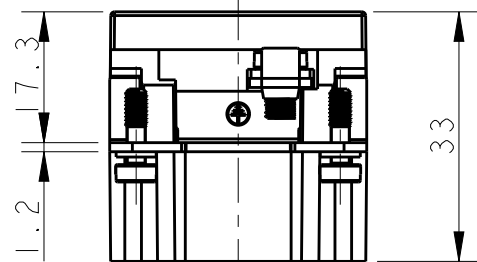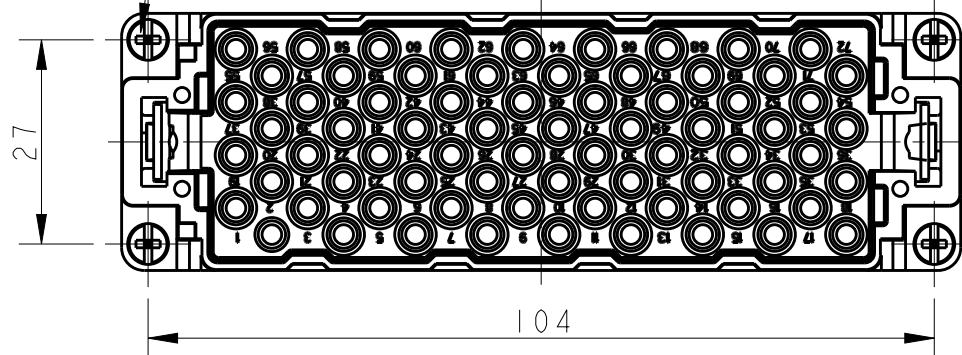

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件安装平面开孔图

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X10XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

T2050722101-007

HEEE-072-M

HEEE-072 MALE INSERT
HEEE-072 公插PART NUMBER
料号PART DESCRIPTION
产品描述

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 30AUG2017

YORK CHEN

CHK 30AUG2017

GINO YAO

APVD 30AUG2017

CHRIS WANG

PRODUCT SPEC

108-137068

APPLICATION SPEC

114-137068


WEIGHT

-

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±0
1 PLC	±0.1
2 PLC	±0.2
3 PLC	±0.3
4 PLC	±0.4
ANGLES	±0.5

MATERIAL

-

FINISH

-

DWN 30AUG2017

YORK CHEN

CHK 30AUG2017

GINO YAO

APVD 30AUG2017

CHRIS WANG

PRODUCT SPEC

108-137068

APPLICATION SPEC

114-137068

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME

HEEE-072-M

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C

T2050722101007

-

SCALE

1:1

SHEET

OF

REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2050722101-007](#)