



Ordering Information:




C2501HF-2P - **
1 2

1.Part No.

2.Color:

(blank):Red(Nylon 66 UL94V-2)

WH:White(Nylon 66 UL94V-0)

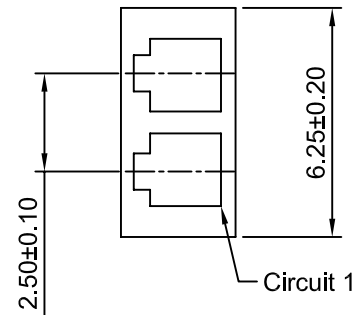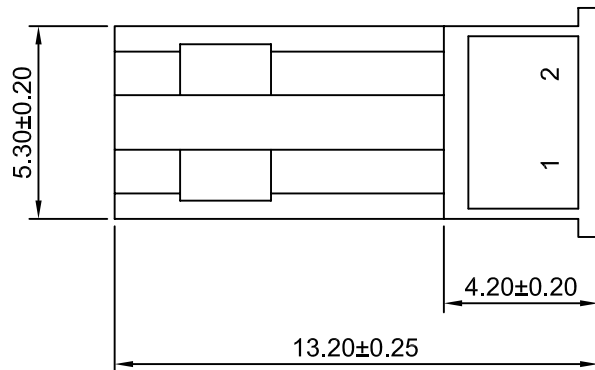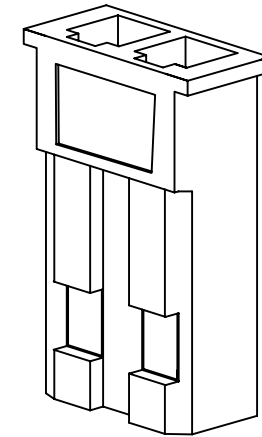

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Red)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
2.50mm PITCH
HOUSING

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10

General Tolerance	ANGLE±
x.x≤0.25	45°
x.xx≤0.20	45°
x.xxx≤0.15	45°

DRAW NO : **C2501HF-2P** REV A0