

PRODUCT NUMBER
10082202-YYX-XXLF

PLATING: _____ ROHS COMPATIBLE SEE NOTE 7

1 = 0.76µm GOLD OR 0.76µm GXT (PdNi WITH GOLD FLASH) ON CONTACT AREA 2µm MATTE TIN ON TAIL TOTAL NB OF POSITIONS 04 TO 72 PACKAGING NOTE 3.

4 = 2µm MATTE TIN ON CONTACT AREA AND TAIL

8 = 0.38µm GOLD ON CONTACT AREA 2µm MATTE TIN ON TAIL





PIN STYLE	DIM "B"	MATING SIDE
01	2.50	5.84
02	2.50	6.75
03	3.00	5.84
04	3.00	6.75
05	2.90	8.80

NOTES:

- HOUSING MAT'L : HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- PACKAGING :
 - = POLY BAGS
 - A = TAPE & REEL WITH CAP, AS AVAILABLE

- 9N MIN RETENTION IN EITHER DIRECTION
- TO DETERMINE DIMENSIONS :
 - N = NUMBER OF POSITIONS PER ROW
 - EXAMPLE : 8 POS N x 2.54 = 20.32mm
- UNDERPLATING : 1.27µm Ni MIN
- ROHS COMPATIBLE PRODUCT SPECIFICATIONS

- PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
- MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMP FOR 30 SECONDS IN A CONVECTION, INFRARED, OR VAPOR REFLOW OVEN
- LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
- LEGAL STATEMENT: SEE GS-47-0004

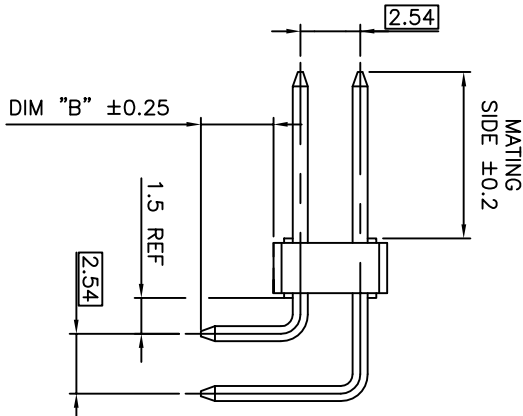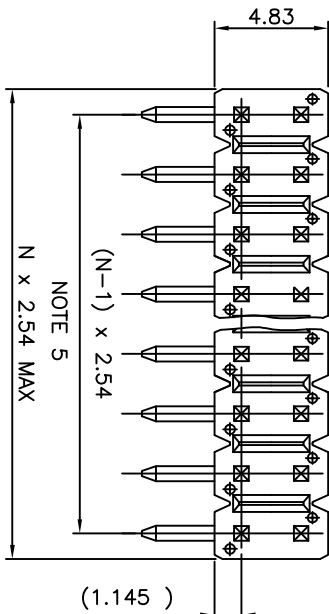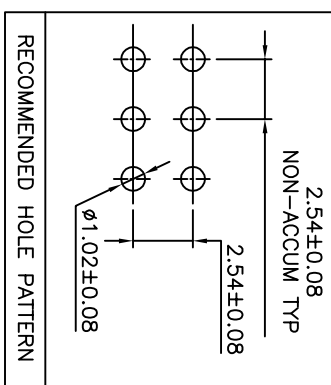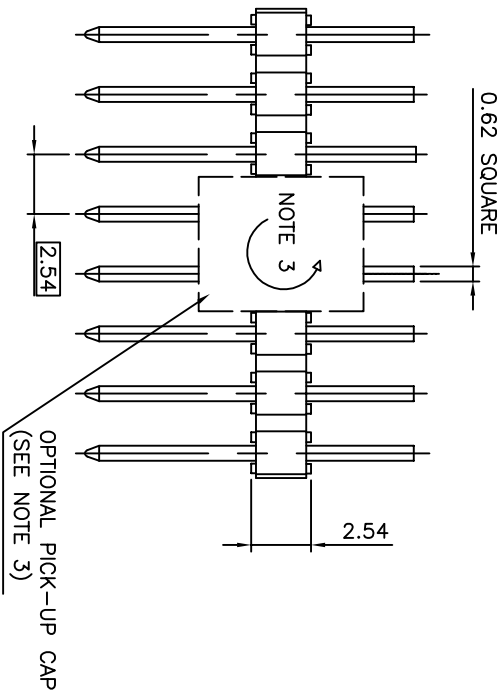

mat'l. code	surface	tolerance	projection	product family
SEE NOTES	ISO 1302	ISO 406	ISO 1101	BENGSSTIK
lfr	ecm no	dr	date	tolerances unless otherwise specified
A	F08-0104	LMU	08.01.15	X ±0.3
B	F08-0128	LMU	08.02.22	linear
C	F08-0072	JCO	08.07.23	XXX ±0.05
D	B-18990	LMU	14.10.06	dr
E	B-20031	AMA	15.01.20	engr
F	F-23188	AMA	16.02.01	chr
sheet	revision	sheet	sheet	sheet
index	sheet	sheet	sheet	sheet

UNSHR.HEADER
RA DR PIN IN PASTE

FCI
sheet 1 of 1
size A3
CUSTOMER Drawing