




Technical Data

22.01.2024

Heat shrinkable tubing adhesive lined - 1.2 m lengths
TA42 - thin wall, 4:1 shrink ratio

TA42-24/6

Article Number 318-42400

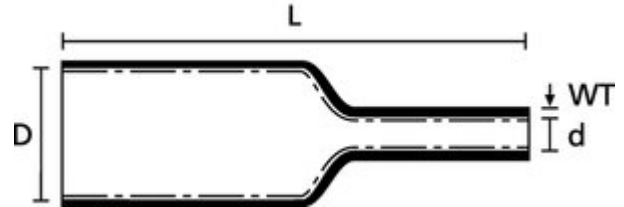

Material: Polyolefin, cross-linked (PO-X)
Colour: Black (BK)
Adhesive: Hot melt adhesive

Supplied Ø D min.: 24.0 mm
Recov. Ø d max.: 6.0 mm
Wall (WT): 2.20 mm
Shrink Ratio: 4:1
Min. Shrink Temperature - °C: +110 °C

Test Method

Flammability: UL 224 VW-1
Operating Temperature : -55 °C to +125 °C
Heat Shock Test: 4h/250°C
Behaviour at Heat Shock: not cracking, not dripping, not fluid

Dielectric Strength: 20 kV/mm
Tensile Strength: 15 MPa
Elongation at break: 350%
Water Absorption: 0.5 %
Specifications: ANSI/UL 224

ASTM D876
ASTM D638
ASTM D638



We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved