

Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications

AVX RF



PRODUCT OFFERING

Hi-Q®, high RF power, surface mount MLC capacitors from AVX Corporation are characterized with ultra-low ESR and dissipation factor at high frequencies. They are designed to handle high power and high voltage levels for applications in RF power amplifiers, inductive heating, high magnetic field environments (MRI coils), medical and industrial electronics.


HOW TO ORDER

AVX Style	Voltage	Temperature Coefficient	Capacitance Code	Capacitance Tolerance	Test Level	Termination	Packaging
HQCC	300V = 9	C0G = A	(2 significant digits + no. of zeros)	B = 0.1pF (<8.2pF)	A = Standard	SMD Termination (HQCC/HQCE)	1A = 7" Reel*
HQCE	500V = 7	P90 = M	Examples:	C = ±0.25pF (<8.2pF)		T = Plated Ni and Sn (RoHS Compliant)	6A = Waffle Pack
HQLC**	800V = U		4.7 pF = 4R7	D = ±0.50pF (<8.2pF)		J = 5% Min Pb	*HQCC & HQCE only
HQLE**	1000V = A		10 pF = 100	F = ±1% (≥10pF)		7 = Plated Ni and Au	
	1500V = S		100 pF = 101	G = ±2%		H = Cu/Sn (Non-Magnetic)	
	2500V = W		1,000 pF = 102	J = ±5%			
	3000V = H			K = ±10%			
	3600V = J			M = ±20%			
	5000V = K						
	7200V = M						

**Note: HQLC/HQLE are only available with leaded termination styles. All capacitance values by size/dielectric still apply.

DIMENSIONS

HQCC/HQCE



STYLE	HQCC	HQCE
(L) Length	5.84 +0.51 -0.25 (0.230 +0.020 -0.010)	9.65 +0.38 -0.25 (0.380 +0.015 -0.010)
(W) Width	6.35 ± 0.38 (0.250 ± 0.015)	9.65 ± 0.25 (0.380 ± 0.010)
(T) Thickness Max.	3.68 (0.145) max. for capacitance values ≤ 680pF 4.19 (0.165) max. for capacitance values > 680pF	4.32 (0.170) max.
(t) Overlap	1.02 (0.040) max.	1.02 (0.040) max.


mm (inches)

Not RoHS Compliant



For RoHS compliant products,
please select correct termination style.

HQLC/HQLE

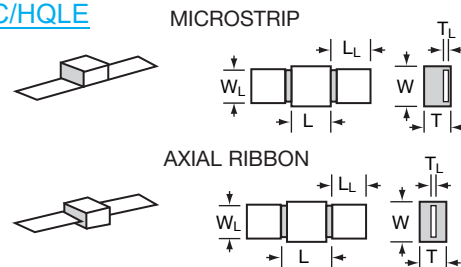

STYLE	HQLC	HQLE
(L) Length	6.22 ± 0.64 (0.245 ± 0.025)	9.65 +0.89 -0.25 (0.380 +0.035 -0.010)
(W) Width	6.35 ± 0.38 (0.250 ± 0.015)	9.65 ± 0.25 (0.380 ± 0.010)
(T) Thickness Max.	3.68 (0.145) max. for capacitance values ≤ 680pF 4.19 (0.165) max. for capacitance values > 680pF	4.32 (0.170) max.
(L _L) Lead Length	12.7 min. (0.500)	19.05 (0.750)
(W _L) Lead Width	6.10 ± 0.127 (0.240 ± 0.005)	8.89 ± 0.25 (0.350 ± 0.010)
(T _L) Lead Thickness	0.102 ± 0.025 (0.004 ± 0.001)	0.25 ± 0.13 (0.010 ± 0.005)
Lead Material	High Purity Silver Leads Leads are attached with High Temperature Solder	High Purity Silver Leads Leads are attached with High Temperature Solder

mm (inches)


AVX

Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



MOUNTING DIMENSIONS

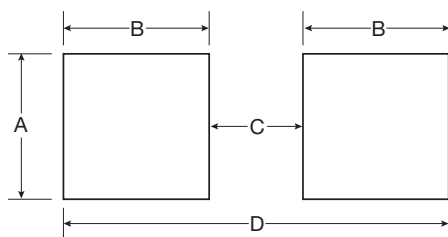

HQCC

mm (inches)

Mounting Orientation	Layout Type	A min.	B min.	C min.	D min.
Horizontal	Normal	7.112 (0.280)	1.270 (0.050)	5.080 (0.200)	7.620 (0.300)
	High Density	6.604 (0.260)	0.762 (0.030)	5.080 (0.200)	6.604 (0.260)
Vertical (<680pF)	Normal	3.810 (0.150)	1.270 (0.050)	5.080 (0.200)	7.620 (0.300)
	High Density	3.302 (0.130)	0.762 (0.030)	5.080 (0.200)	6.604 (0.260)
Vertical (>680pF)	Normal	4.699 (0.185)	1.270 (0.050)	5.080 (0.200)	7.620 (0.300)
	High Density	4.191 (0.165)	0.762 (0.030)	5.080 (0.200)	6.604 (0.260)

HQCE

mm (inches)

Mounting Orientation	Layout Type	A min.	B min.	C min.	D min.
Horizontal	Normal	10.287 (0.405)	1.270 (0.050)	8.255 (0.325)	10.795 (0.425)
	High Density	9.779 (0.385)	0.762 (0.030)	8.255 (0.325)	9.779 (0.385)
Vertical	Normal	4.699 (0.185)	1.270 (0.050)	8.255 (0.325)	10.795 (0.425)
	High Density	4.191 (0.165)	0.762 (0.030)	8.255 (0.325)	9.779 (0.385)

DIELECTRIC PERFORMANCE CHARACTERISTICS

Capacitance Range	1.0pF to 2,700pF (25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)
Capacitance Tolerances	±0.10pF, ±0.25pF, ±0.50pF, ±1%, ±2%, ±5%, ±10%, ±20%
Dissipation Factor 25°C	0.1% Max (+25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	C0G: 0 ± 30 ppm/°C (-55°C to +125°C), P90: 90 ± 30 ppm/°C (-55°C to +125°C)
Insulation Resistance	100K MΩ min. @ +25°C and 500VDC 10K MΩ min. @ +125°C and 500VDC
Dielectric Strength	250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds. 150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds. 120% of WVDC for capacitors rated above 1250 volts DC or less for 5 seconds.

Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



HQCC/HQLC CAPACITANCE VALUES (A DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC
1R0	1.0	B, C, D	2500	8R2	8.2	B, C, D	2500	680	68	F, G, J K, M	2500	471	470	F, G, J K, M	1500
1R2	1.2			100	10	820		82	561			560	1000		
1R5	1.5			120	12	101		100	681			680			
1R8	1.8			150	15	121		120	821			820			
2R2	2.2			180	18	151		150	102			1000			
2R7	2.7			220	22	181		180	122			1200			
3R3	3.3			270	27	221		220	152			1500	500		
3R9	3.9			330	33	271		270	182			1800	300		
4R7	4.7			390	39	331		330	1500		222	2200			
5R6	5.6			470	47	391		390			272	2700			
6R8	6.8			560	56										

HQCC/HQLC CAPACITANCE VALUES (M DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC	
			Standard	Extended				Standard	Extended				Standard	Extended
1R0	1.0	B, C, D	2500	3600	100	10	F, G, J K, M	2500	3600	161	160	F, G, J K, M	2500	3000
1R1	1.1				110	11				181	180			
1R2	1.2				120	12				201	200			
1R3	1.3				130	13				221	220			
1R4	1.4				150	15				241	240			
1R5	1.5				160	16				271	270			
1R6	1.6				180	18				301	300		1500	2000
1R7	1.7				200	20				331	330			
1R8	1.8				220	22				331	330			
1R9	1.9				240	24				361	360			
2R0	2.0				270	27				391	390			
2R1	2.1				300	30				431	430			
2R2	2.2				330	33				471	470		1000	1500
2R4	2.4				360	36				511	510			
2R5	2.5				390	39				561	560			
3R0	3.0				430	43				621	620			
3R3	3.3				470	47				681	680			
3R6	3.6				510	51				751	750			
3R9	3.9	560	56	821	820	500	800							
4R3	4.3	620	62	911	910									
4R7	4.7	680	68	102	1000									
5R1	5.1	750	75	112	1100									
5R6	5.6	820	82	122	1200	300	500							
6R2	6.2	910	91	152	1500									
6R8	6.8	101	100	182	1800									
7R5	7.5	111	110	222	2200									
8R2	8.2	121	120	242	2400									
9R1	9.1	131	130	272	2700									
		151	150											

HQCE/HQLE CAPACITANCE VALUES (A DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC	
			Standard	Extended				Standard	Extended				Standard	Extended
1R0	1.0	C, D	3600	7200	150	15	G, J, K, M	3600	7200	221	220	G, J, K, M	3600	NA
1R2	1.2				180	18				271	270			
1R5	1.5				220	22				331	330			
1R8	1.8				270	27				391	390			
2R2	2.2				330	33				471	470			
2R7	2.7				390	39				561	560			
3R3	3.3				470	47				681	680			
3R9	3.9				560	56				821	820			
4R7	4.7				680	68				102	1000			
5R6	5.6	820	82	122	1200									
6R8	6.8	101	100	152	1500									
8R2	8.2	121	120	182	1800									
100	10	G, J, K, M			151	150		5000		222	2200			
120	12				181	180								

HQCE/HQLE CAPACITANCE VALUES (M DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC	
			Standard	Extended				Standard	Extended				Standard	Extended
1R0	1.0	B, C, D	3600	7200	180	18	F, G, J, K, M	3600	7200	331	330	F, G, J, K, M	3600	NA
1R2	1.2				220	22				391	390			
1R5	1.5				270	27				471	470			
1R8	1.8				330	33				561	560		2500	
2R2	2.2				390	39				681	680			
2R7	2.7				470	47				821	820			
3R3	3.3				560	56				102	1000		1000	
3R9	3.9				680	68				122	1200			
4R7	4.7				820	82				152	1500			
5R6	5.6				101	100				182	1800			
6R8	6.8	121	120	222	2200	500								
8R2	8.2	151	150	272	2700									
100	10	181	180	332	3300									
120	12	F, G, J, K, M			472	4700	G, J K, M							
150	15				221	220			512	5100				
					271	270								







Hi-Q® High RF Power MLC Surface Mount Capacitors



For 600V to 7200V Applications



HQCC PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

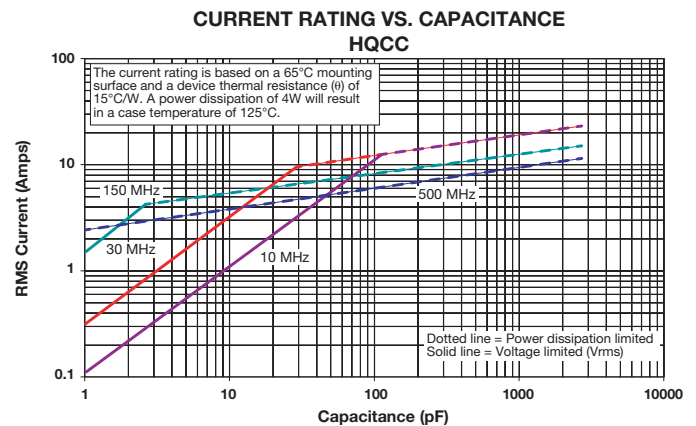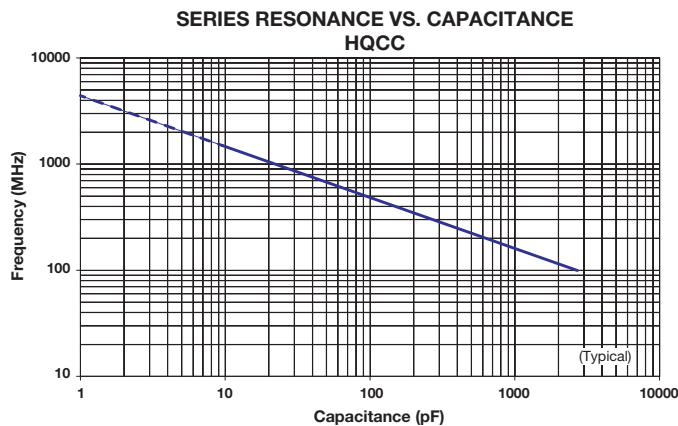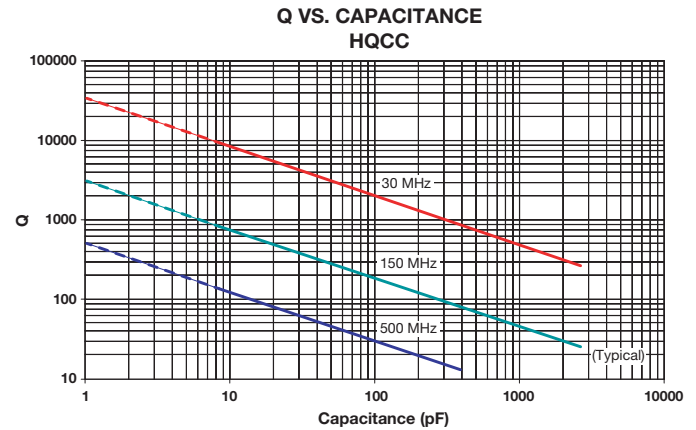
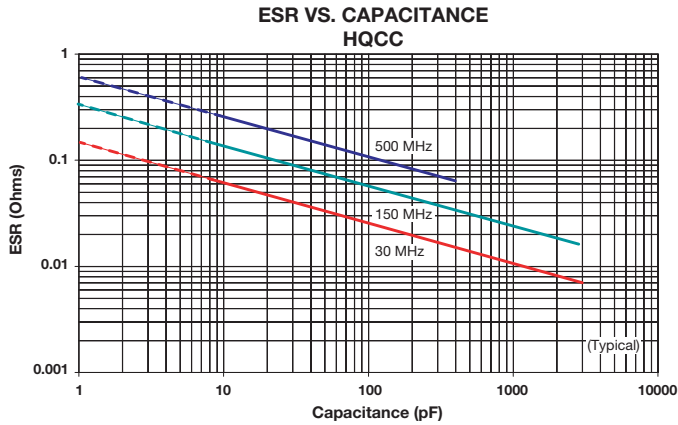


HQCC PERFORMANCE CHARACTERISTICS (M DIELECTRIC)



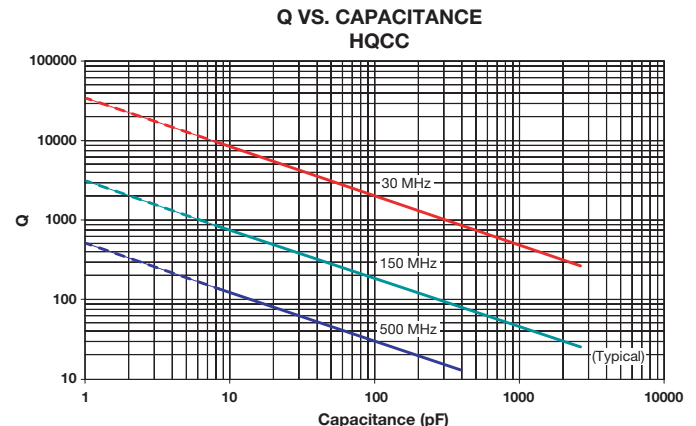
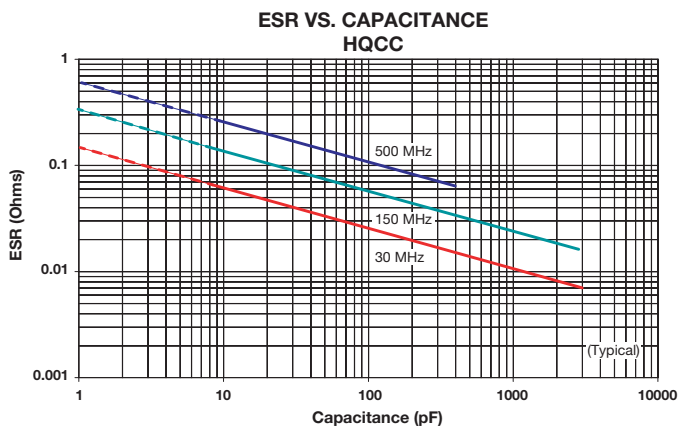


Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



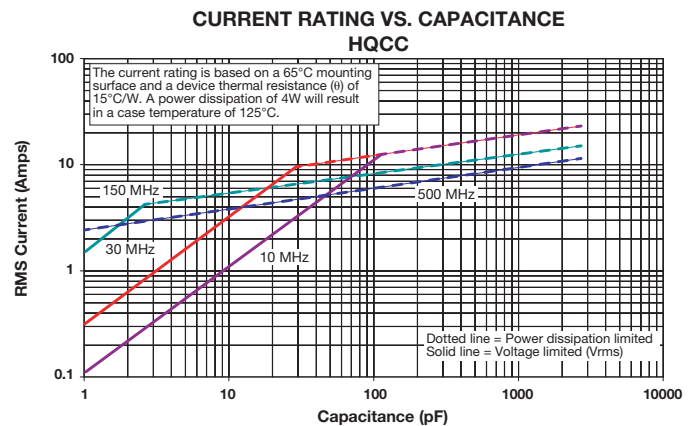
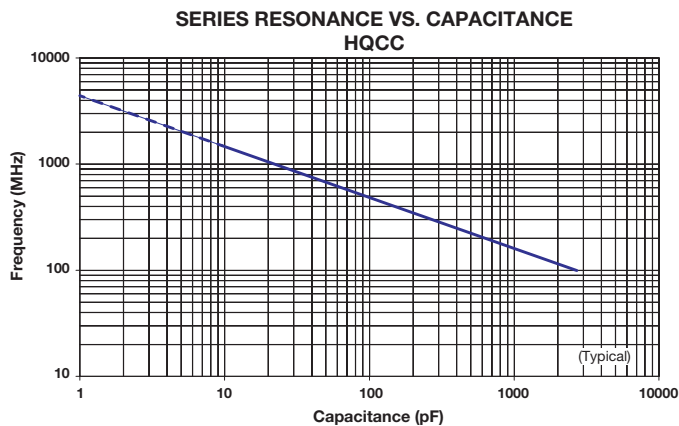


HQCE PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

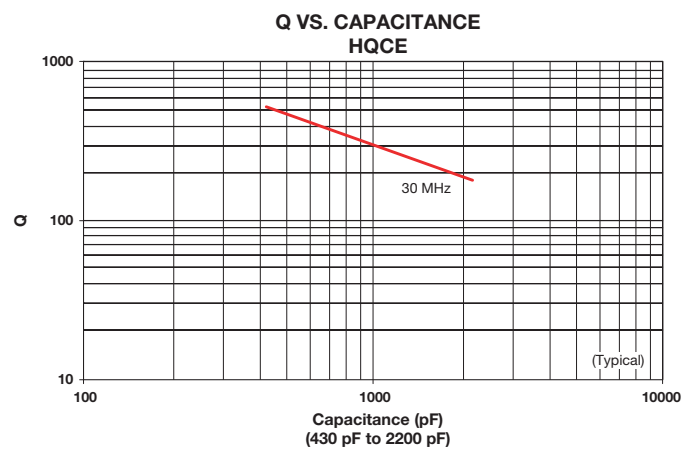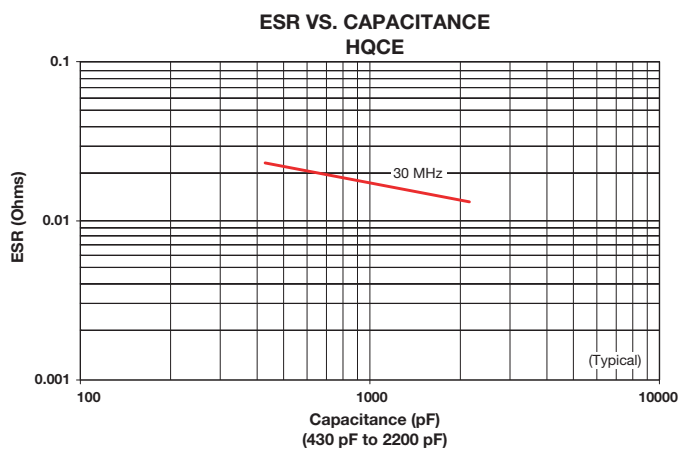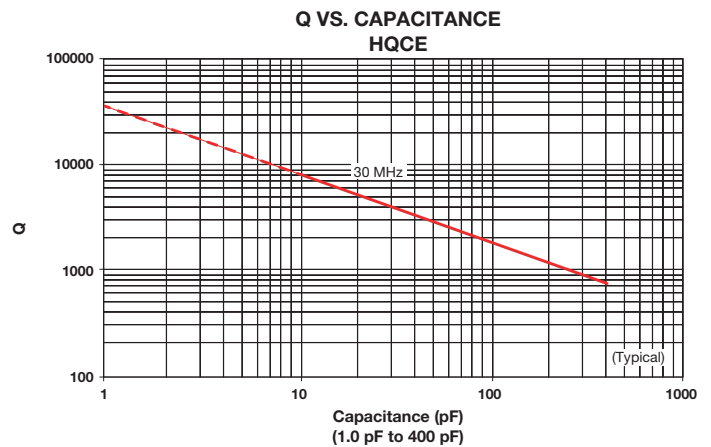
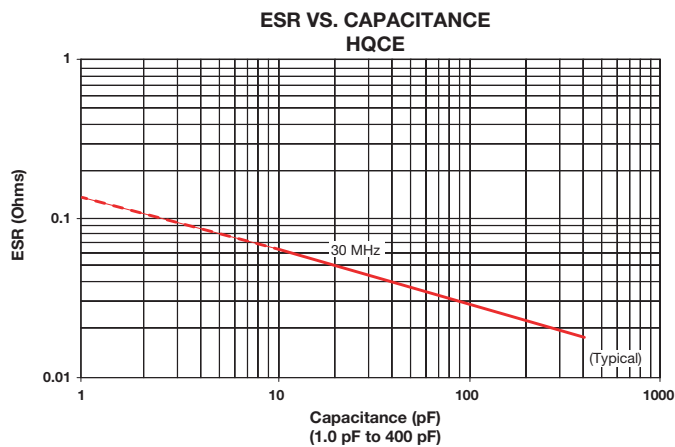


Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications

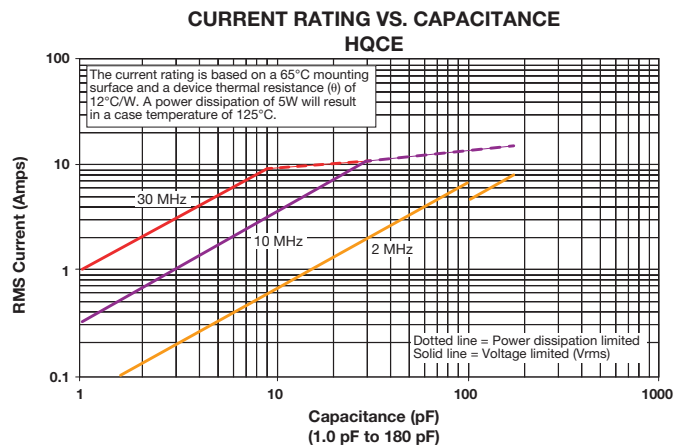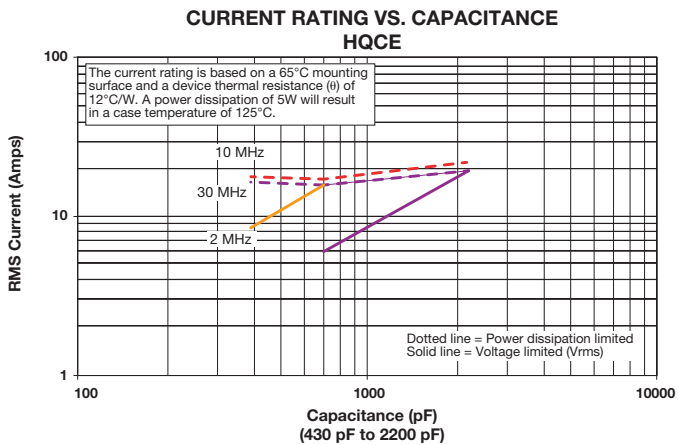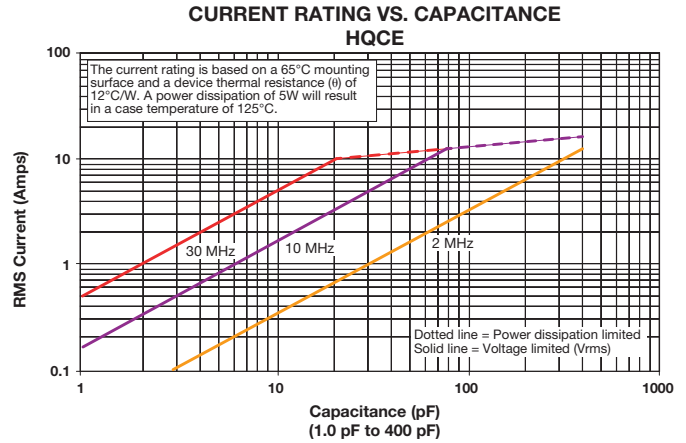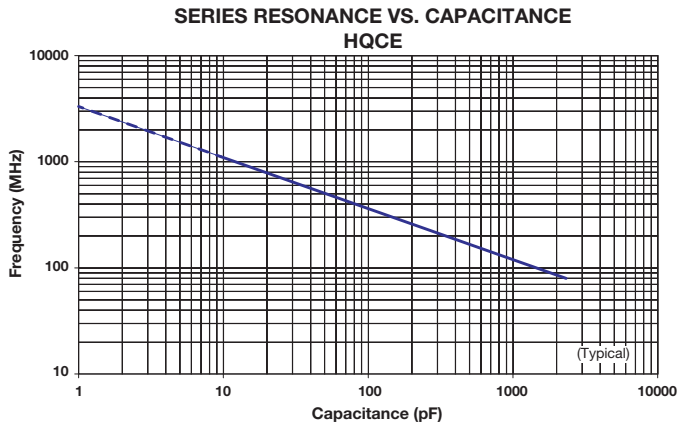

HQCE PERFORMANCE CHARACTERISTICS (M DIELECTRIC)

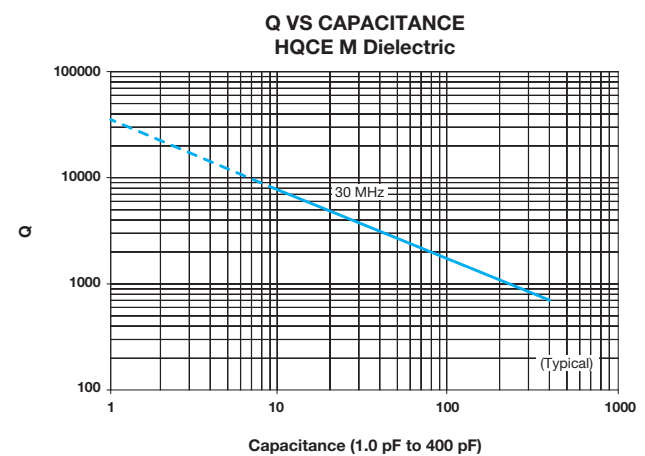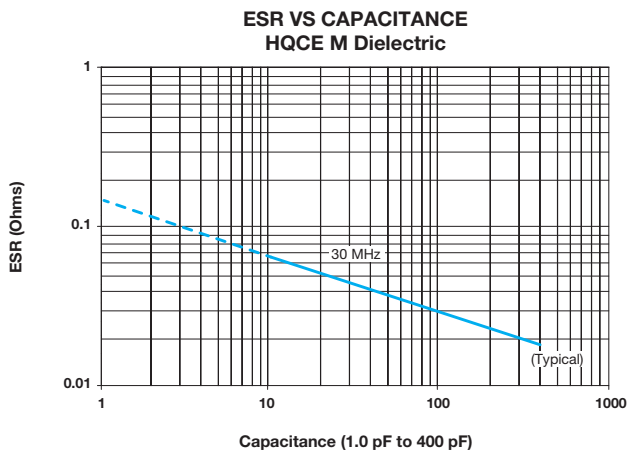

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[HQCEMA680FAT9A](#) [HQCEMA680FAT3A](#) [HQCEKA151JAT9A](#) [HQLCHA6R8CAM](#) [HQLCGA471GAM](#)
[HQCCHA3R3DAT9A](#) [HQLCSA102GAM](#) [HQCEMA470JAT9A](#) [HQLEKA111JAM](#) [HQLEAA332GAM](#)
[HQCEMA101JAT3A](#) [HQLEMA270JAM](#) [HQLCHA220DAM](#) [HQCEMA750FAT3A](#) [HQCEMA430FAT3A](#)
[HQCEMA270FAT3A](#) [HQLCCA222GAM](#) [HQLEAA392GAM](#) [HQLCHA150DAM](#) [HQLEMA101KAA](#) [HQCCHA200GA19A](#)
[HQCCHA180GA11A](#) [HQCCHA820KA11A](#) [HQCCHA131GA11A](#) [HQCCHA200GA11A](#) [HQCCHA330GAT9A](#)
[HQCCHA101GA11A](#) [HQCCHA120GAT9A](#) [HQCCHA121GAT9A](#) [HQCCHA150GA11A](#) [HQCCHA151JA19A](#)
[HQCCHA220GAT1A](#) [HQCCHA220GAT9A](#) [HQCCHA221GAT9A](#) [HQCCHA271GAT9A](#) [HQCCHA330GA11A](#)
[HQCCHA390GAT9A](#) [HQCCHA4R7CA19A](#) [HQCCHA560GAT9A](#) [HQCCHA680GAT9A](#) [HQCCHA6R8CAT1A](#)
[HQCCSA102KAT1A](#) [HQCCSA821GAT9A](#) [HQCCWA331GAT9A](#) [HQCCWA391GAT9A](#) [HQCECA682KAT3A](#)
[HQCEGA122JAT9A](#) [HQCEGA182KAT3A](#) [HQCEGA182KAT9A](#) [HQCEHA561JAT9A](#) [HQCEHA681JA19A](#)
[HQCEHA681JAT9A](#) [HQCEJA221JAT9A](#) [HQCEJA391JAT9A](#) [HQCEWA821JAT9A](#) [HQLCHA470KAM](#)
[HQLCHA560KAM](#) [HQLCHA820KAM](#) [HQCCSA122FAT1A](#) [HQCEMA180JAT6A](#) [HQCEMA101JAT6A](#)
[HQCEMA220JAT9A](#) [HQCEMA270JAT9A](#) [HQCEMA330JAT9A](#) [HQLEGA122GAM](#) [HQLEHA511GAM](#)
[HQCC7M152GAH6A](#) [HQCC7M182GAH6A](#) [HQCC9M222GAH6A](#) [HQCC9M272GAH6A](#) [HQCCAM102GAH6A](#)
[HQCCAM122GAH6A](#) [HQCCAM561GAH6A](#) [HQCCAM681GAH6A](#) [HQCCAM821GAH6A](#) [HQCCSM361GAH6A](#)
[HQCCSM471GAH6A](#) [HQCCWM100GAH6A](#) [HQCCWM101GAH6A](#) [HQCCWM120GAH6A](#) [HQCCWM121GAH6A](#)
[HQCCWM150GAH6A](#) [HQCCWM151GAH6A](#) [HQCCWM180GAH6A](#) [HQCCWM181GAH6A](#) [HQCCWM200GAH6A](#)
[HQCCWM221GAH6A](#) [HQCCWM240GAH6A](#) [HQCCWM271GAH6A](#) [HQCCWM2R0BAH6A](#) [HQCCWM2R4BAH6A](#)
[HQCCWM300GAH6A](#) [HQCCWM330GAH6A](#) [HQCCWM3R3BAH6A](#) [HQCCWM3R9BAH6A](#) [HQCCWM430GAH6A](#)
[HQCCWM470GAH6A](#) [HQCCWM4R7BAH6A](#) [HQCCWM510GAH6A](#) [HQCCWM560GAH6A](#)