
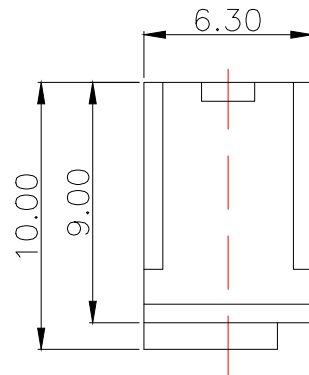
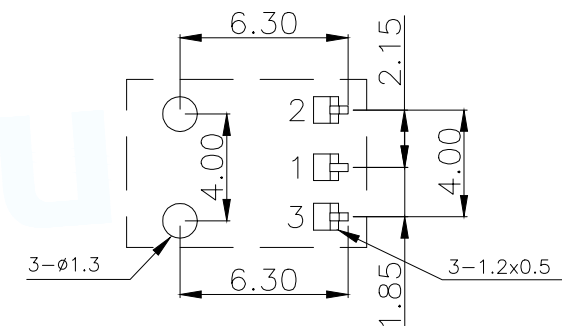
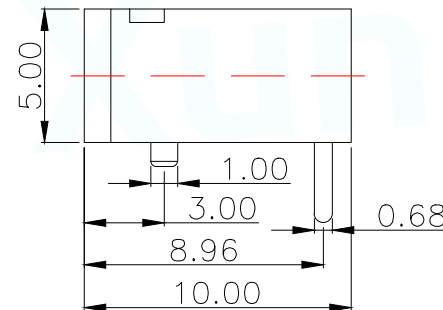
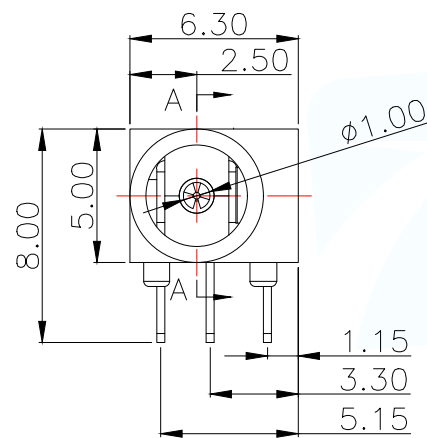



A-A

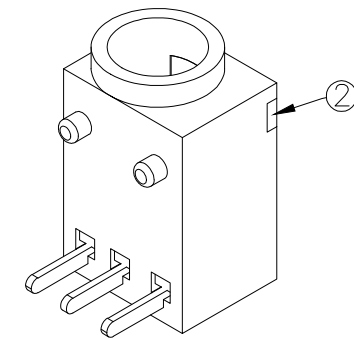

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance

Rated electrical load	DC 12V 2A
Contact resistance	≤30mΩ
Insulation resistance	≥100MΩ
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

6	弹片	1	H62	镀银
5	插片	1	H62	镀银
4	平片	1	H62	镀银
3	中心针	1	H62	铜锡
2	盖板	1	PPA	黑
1	底座	1	PPA	黑
序号	名称	数量	材料	备注
MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: DC SOCKET	
DECIMALS:			PAR	DC-003A-B100
ANGLES:			DWN	
X.X±0.30			CHKD	
X.XX±0.25			APVD	
X.XXX±0.15			SCALE:A	UNIT:MM
CUSTOMER COPY			SIZE:A4	SHEET:1F1
				REV:A