



Removable terminal 3-pole, screw terminals up to maximal 2 x 1.5 mm² or 1 x 2.5 mm², For SIRIUS devices in industrial standard mounting rail enclosure

product brand name		SIRIUS			
product category		Removable terminals			
product designation		Terminal for control circuit/3-pole			
design of the product		Screw terminal/up to 2 x 1.5 mm² or 1 x 2.5 mm²			
General technical data					
protection class IP		IP20			
type of connectable conductor cross-sections					
● solid					
● finely stranded with core end processing					
● at AWG cables solid					
width		7.5 mm			
General Product Approval	Declaration of Conformity		Test Certificates	other	Railway



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1131-1BA00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1131-1BA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1131-1BA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1131-1BA00&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1131-1BA00/manual>

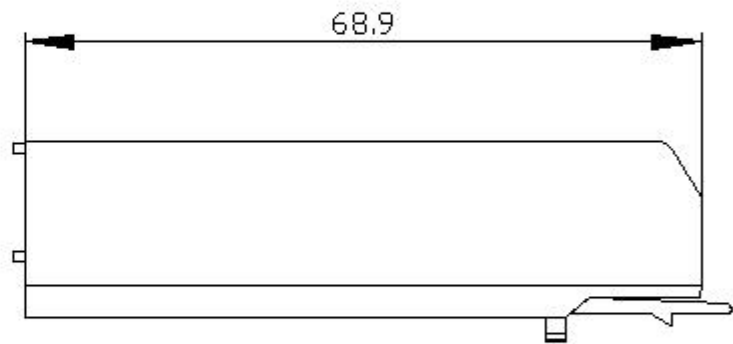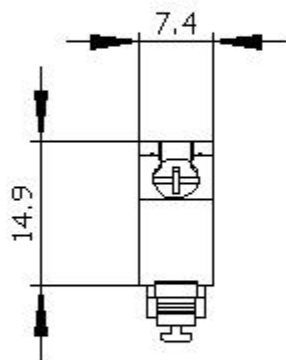

last modified:

11/5/2020 