

SYM	ECN No.	MODIFICATION	DATE	ISSUED

Note:

1.Material:

- 1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:


- 2.1,Current rating:3A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.


3.Finish:

- 3.1,Contact: Plated Golg in Mating Area:
Tin On Solder Talls
Shell: Nickel Plating

4.Environmental:

- 4.1,Temperature range: -55°C~85°C

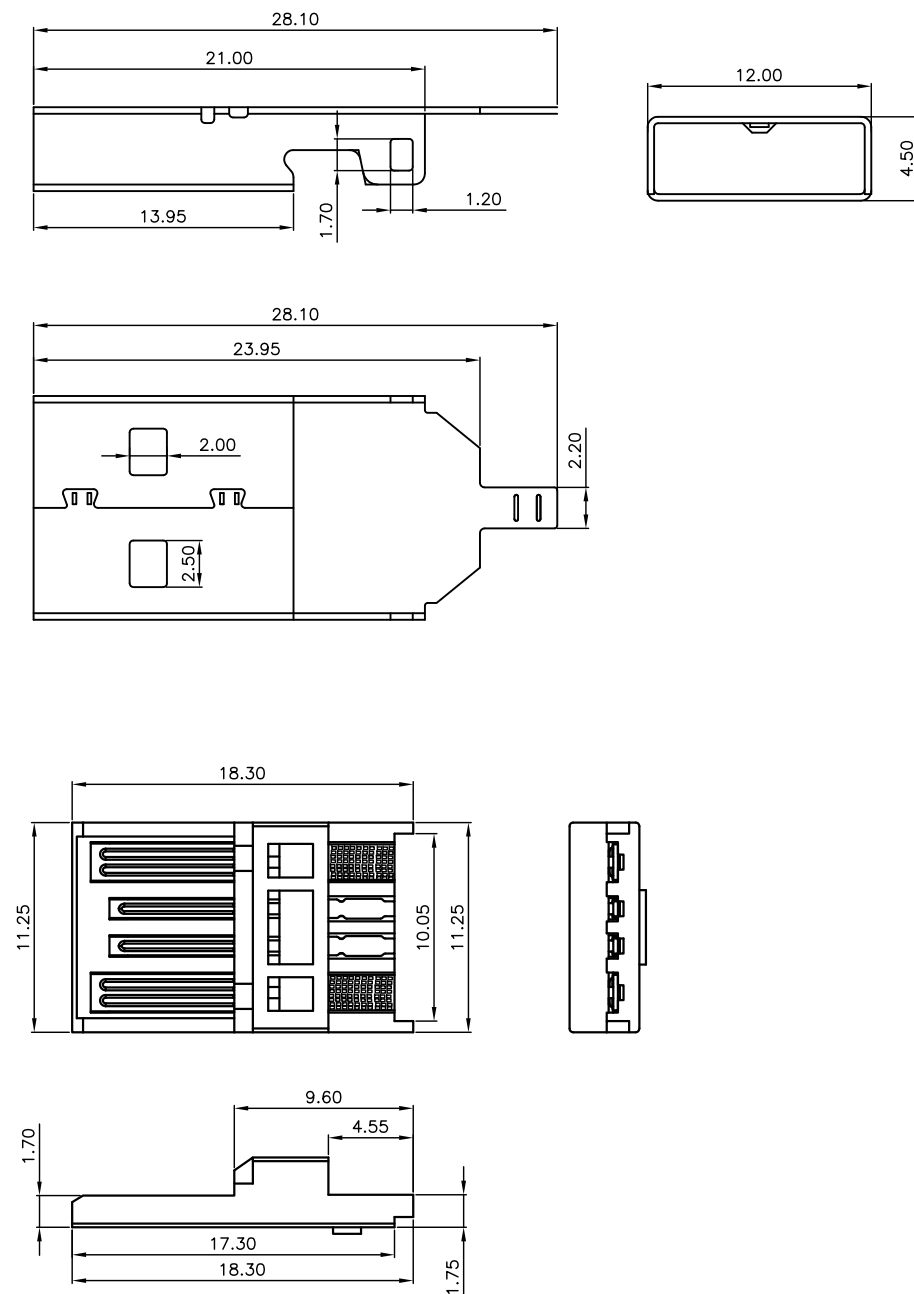

DRAWN		 深圳市精拓金电子有限公司					
CHECKED		TITLE AM大电流三件式铁壳 PBT黑色OD4.0/5A		PART NO. 917-701A102DM0400			
APPROVED				DRAWING NO. __			
 3rd ANGLE PROJECTION	UNIT	TOLERANCE .XXX±.10, .XX±.15, .X±.25, ANG±1°		SCALE	SHEET	SIZE	REV.
	mm			1:1	1 OF 1	A4	X1