2007703-1 ACTIVE

IMPACT

TE Internal #: 2007703-1

90 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 10 Column, PCB Mount Receptacle, IMPACT, High Speed

Backplane Connectors

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Number of Positions: 90

Row-to-Row Spacing: 1.35 mm [.053 in]

Mating Alignment: With

Mating Alignment Type: Keyed

Number of Rows: 9

Features

Product Type Features

Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Receptacle
Shroud Style	Unshrouded
Configuration Features	
Number of Ground Positions	30
Number of Pairs	30
Stackable	No
Number of Signal Positions	60
Number of Positions	90
Number of Rows	9
Number of Columns	10
PCB Mount Orientation	Right Angle
Guide Location	Left
Electrical Characteristics	
Impedance	100 Ω

30 VAC

Operating Voltage



Signal Characteristics

Signal Characteristics	
Number of Differential Pairs per Column	3
Data Rate	20 – 25 Gb/s
Body Features	
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	1.27 μm[50 μin]
Contact Layout	Inline
Contact Type	Socket
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.762 μm[30 μin]
Contact Mating Area Plating Material	Gold
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.75 A
Termination Features	
Termination Post & Tail Length	1.2 mm[.047 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
PCB Mount Alignment Type	Locating Posts
Guide Hardware	With
Mating Retention	Without
PCB Mount Retention	With

Housing Features

Mating Alignment

Mating Alignment Type

Connector Mounting Type

PCB Mount Retention Type

Number of Shrouded Sides	0
Housing Material	LCP - GF (Liquid Crystal Polymer)

Action/Compliant Tail & Screw

With

Keyed

Board Mount



Centerline (Pitch)	1.9 mm[.075 in]
Dimensions	
Connector Length	19 mm[1.047 in]
Connector Height	13.3 mm[.524 in]
Connector Width	24.2 mm[.953 in]
PCB Thickness (Recommended)	1 mm
PCB Hole Diameter	.39 mm[.015 in]
Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Compatible With Approved Standards Products	CSA Certified, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tube, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

Product Compliance Disclaimer

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | IMPACT

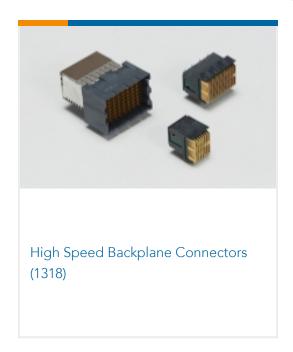

Customers Also Bought




















TE Part #1-2340321-4
ASSY STRADDLE MOUNT 168P 076
SLIVER 2.0

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2007703-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2007703-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2007703-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

7-1773458-1_IMPACT_BACKPLANE_CONNECTOR_SYSTEM_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English