


**THREE CONDUCTOR CABLE, RADIATION-CROSSLINKED, POLYALKENE INSULATED, SHIELDED
AND JACKETED, 600 VOLT, 150°C**

The complete requirements for procuring the wire described herein shall consist of this document.

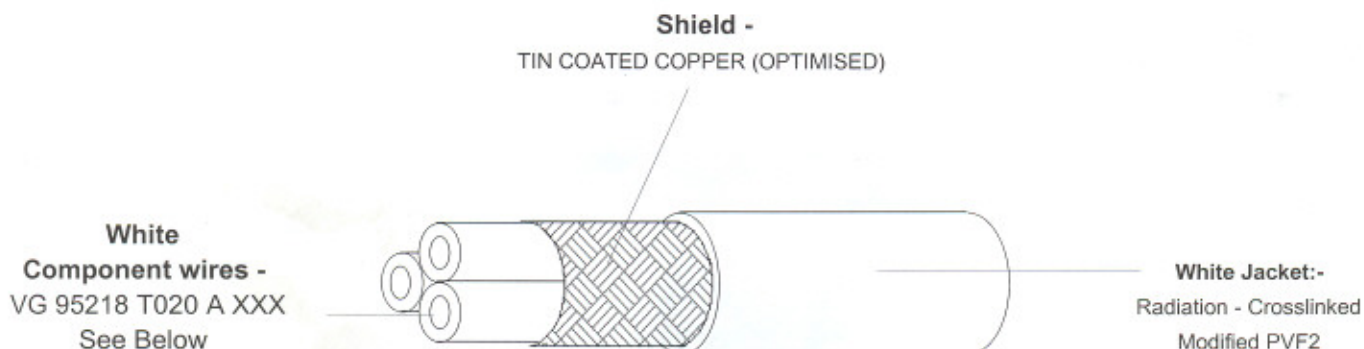

Part Number	Nominal Conductor Cross Sectional Area (mm ²)	Component Wire Description	Maximum Resistance @ 20°C (ohms/km)	Shield Size (mm)	Jacket Thickness (mm)		Overall Diameter (mm)			Maximum Weight (kg/km)
					Min	Nom	Min	Nom	Max	
VG 95218 T023 F006	0.25	VG 95218 T020 A016	87.70	0.13	0.15	0.200	3.02	3.15	3.28	21.40
VG 95218 T023 F004	0.40	VG 95218 T020 A001	54.20	0.13	0.15	0.200	3.43	3.54	3.68	28.00
VG 95218 T023 F005	0.60	VG 95218 T020 A003	34.20	0.13	0.15	0.200	3.86	3.98	4.14	37.20
VG 95218 T023 F014	1.00	VG 95218 T020 A005	21.40	0.13	0.18	0.228	4.42	4.63	4.67	51.30
VG 95218 T023 F015	1.20	VG 95218 T020 A006	16.70	0.13	0.18	0.228	4.80	5.02	5.08	61.10

PERFORMANCE REQUIREMENTS :

Shall be tested to the issue in effect of WSD 955 and shall meet all the requirements the issue in effect of VG 95 218 T023 (Type F)

DESIGN	PROD. MAN.	TECHNICAL	QA	MANUFACTURE
<i>[Signature]</i> 30/7/99	<i>[Signature]</i> 30.7.99	<i>[Signature]</i> 28.7.99	<i>[Signature]</i> 28.7.99	<i>[Signature]</i> 27/7/99

Raychem Limited
Faraday Road
Dorcan
SWINDON
SN3 5HH
Tel: (01793) 528171
Telex: 449409

Registration Number: 674709 London, England
Registered Office: Rolls House
7 Rolls Buildings, Fetter Lane
LONDON
EC4A 1NH

This drawing and the information set forth hereon are the property of Raychem Ltd. and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Raychem Ltd. is prohibited.

This specification sheet takes precedence over documents referenced herein. As Raychem Ltd. reserve the right to make changes in construction without notice please contact Raychem Ltd. to ensure that this document is the latest issue.