
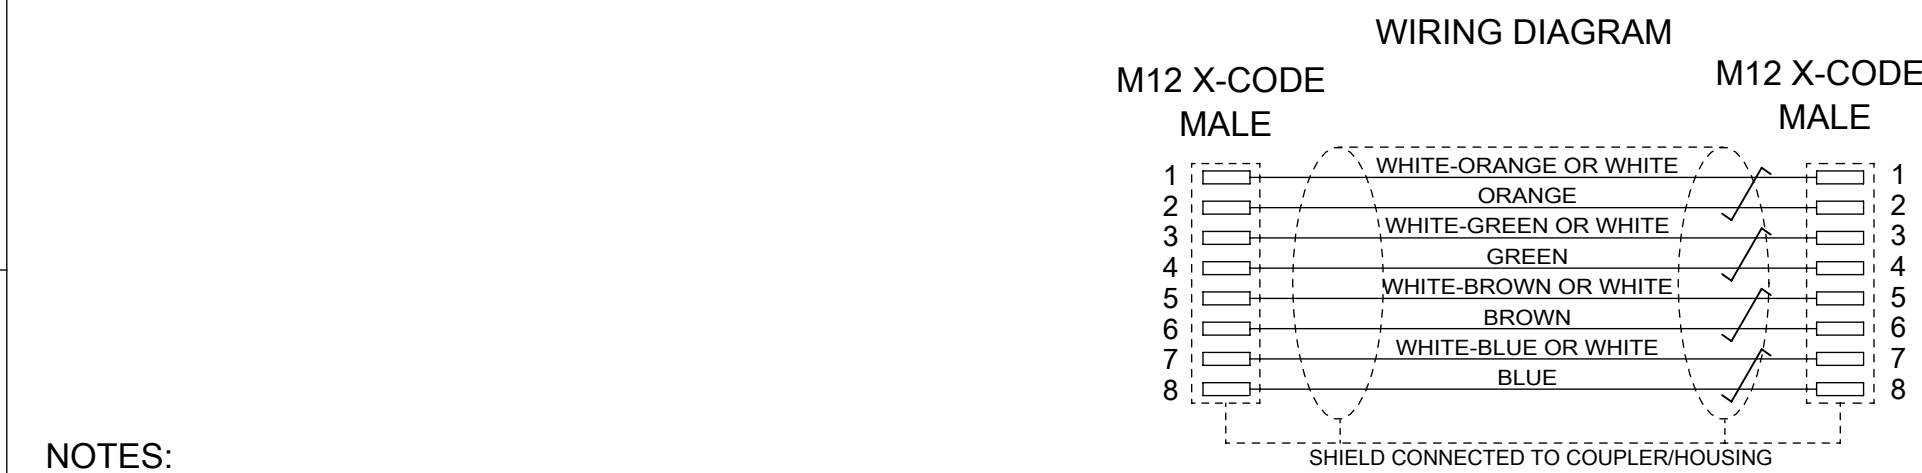



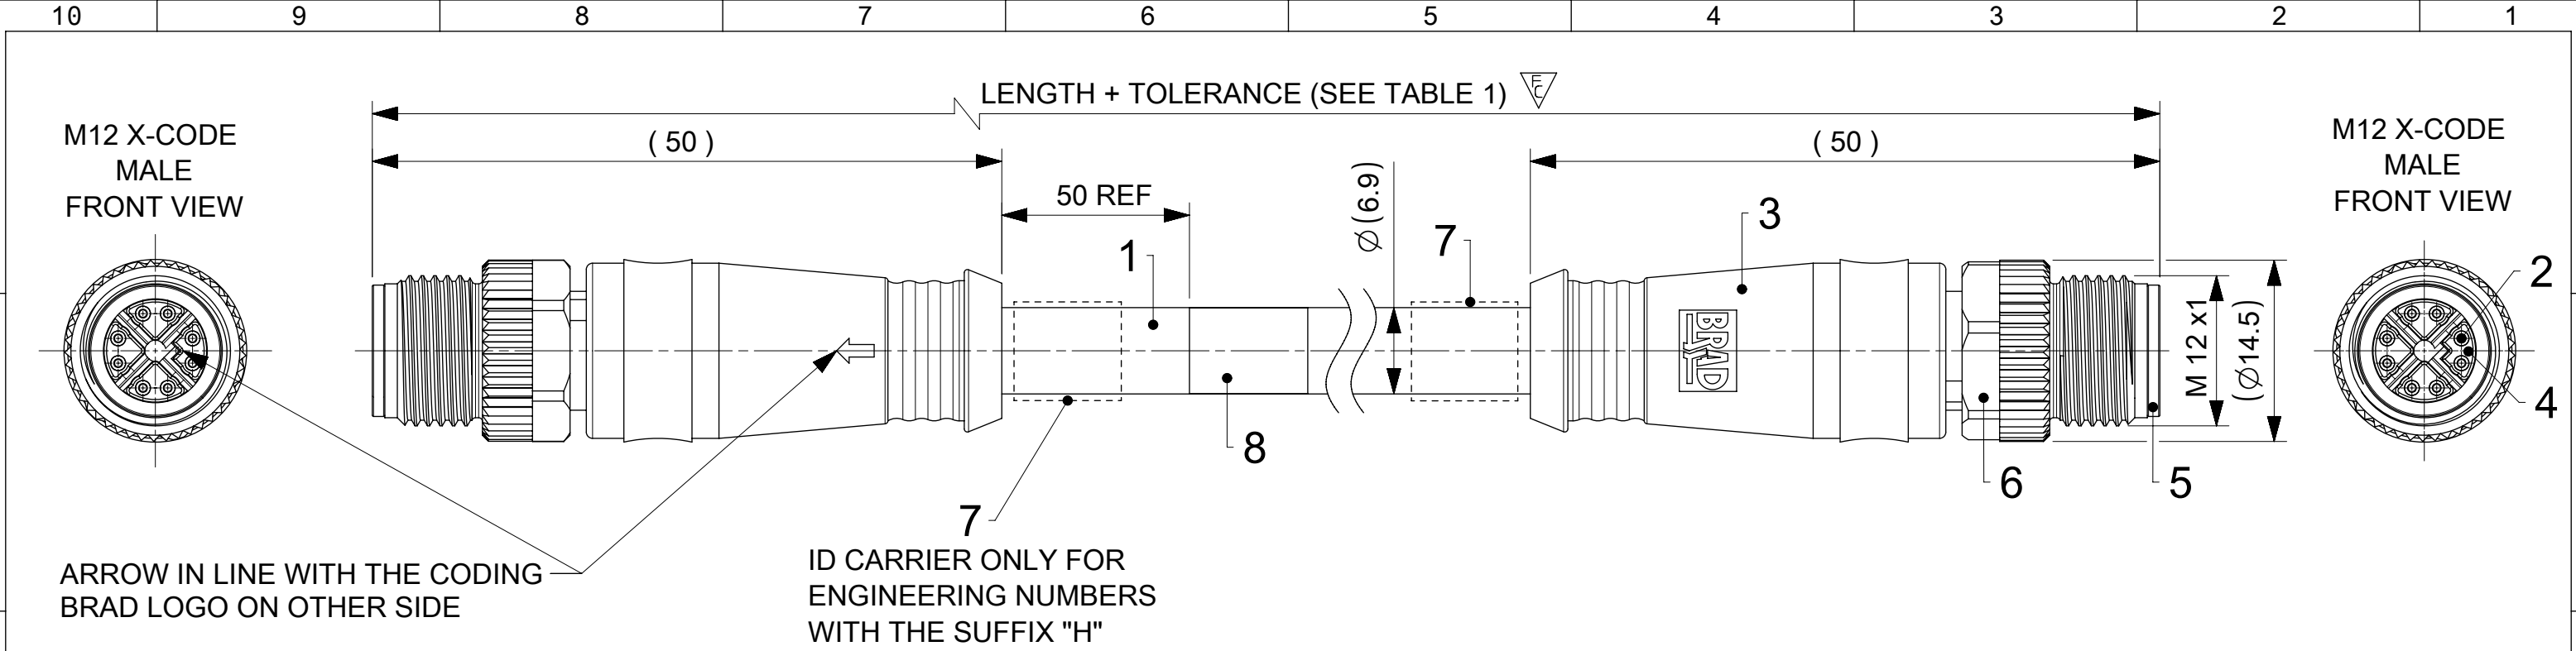


NOTES:
VOLTAGE RATING: 48 V
CURRENT RATING: 0.5 A
TEMPERATURE RATING:
STATIC: -40 °C TO 80 °C
DYNAMIC: -20 °C TO 80 °C
IP RATING: IP 67 (IN MATED AND LOCKED CONDITION)
TRANSMISSION CHARACTERISTICS ACCORDING TO ISO/IEC 11801 CLASS EA CHANNEL,
WITH INSERTION LOSS BEING IGNORED FOR CABLE LENGTHS ≤ 1 m OR ≥ 65 m
POWER TRANSMISSION TEST ACCORDING IEEE802.3bt UP TO 65m LENGTH
PACKAGING: CORDSETS ARE PACKED IN A POLYBAG

BILL OF MATERIAL

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	1	CABLE	PUR	GREEN
2	16	CONTACT 6 MALE	BRASS	Au OVER Ni
3	-	MOLDING MATERIAL	TPU	BLACK
4	2	INSERT M12 CAT6A MALE 8P	PA6	BLACK
5	2	SHELL M12 CAT6A	ZINC DIE-CAST	Ni PLATED
6	2	NUT M12 MALE	BRASS	Ni PLATED
7	2	I/D CARRIER	PVC	TRANSPARENT
8	1	LABEL 2.0X1.75	VINYL	YELLOW

DOCUMENT STATUS	P1	RELEASE DATE	2023/08/29	13:52:05
-----------------	----	--------------	------------	----------

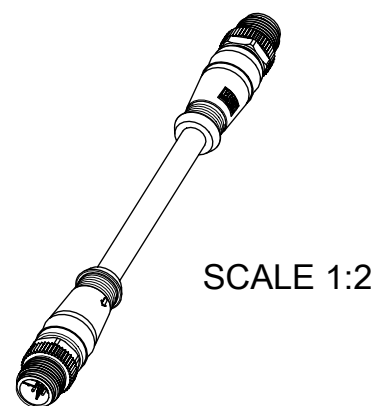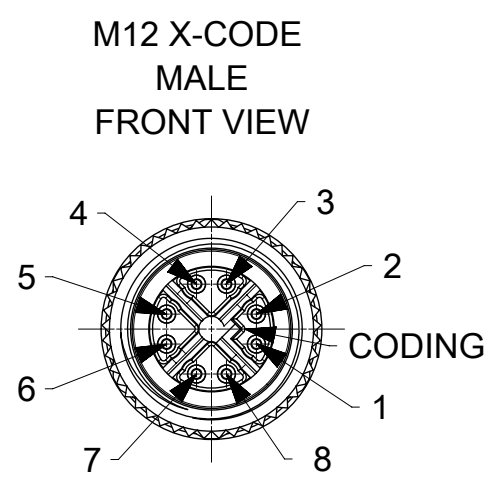

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			
	DIMENSION UNITS	SCALE				
$\nabla A = 0$	mm	2:1				
$\nabla E = 1$	GENERAL TOLERANCES (UNLESS SPECIFIED)					
$\nabla F = 0$	ANGULAR TOL	$\pm 1.0^\circ$				
DIVISIONAL SYMBOLS	4 PLACES	$\pm$	EC NO: 760691	2023/08/21	molex	
	3 PLACES	$\pm$	DRWN: MBLOESER	2023/08/29		
	2 PLACES	± 0.05	CHK'D: RSILLER	2023/08/29	CSE M12 CAT6A 8P XC MA STR PUR XM DE	
	1 PLACE	± 0.3	APPR: RSILLER	2023/08/29	PRODUCT CUSTOMER DRAWING	
	0 PLACES	± 0.5	INITIAL REVISION:			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DRWN: FGAIK	2017/06/19	DOCUMENT NUMBER	DOC TYPE
			APPR: BBRAUCH	2017/06/21	1203410300	PSD
			THIRD ANGLE PROJECTION	DRAWING	SERIES	DOC PART
			A3-SIZE	120341	MATERIAL NUMBER	REVISION
					SEE TABLE 1	000
					GENERAL MARKET	A10
						1 OF 2

[illegible]