
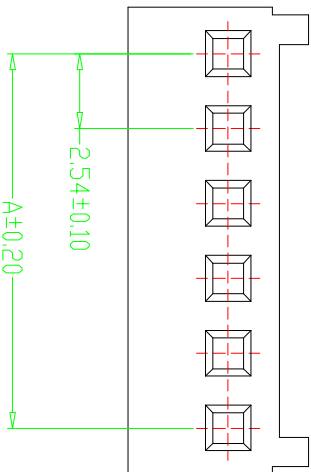


SPECIFICATIONS

- 1、Current Rating: 4A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Nylon66, UL94V-0

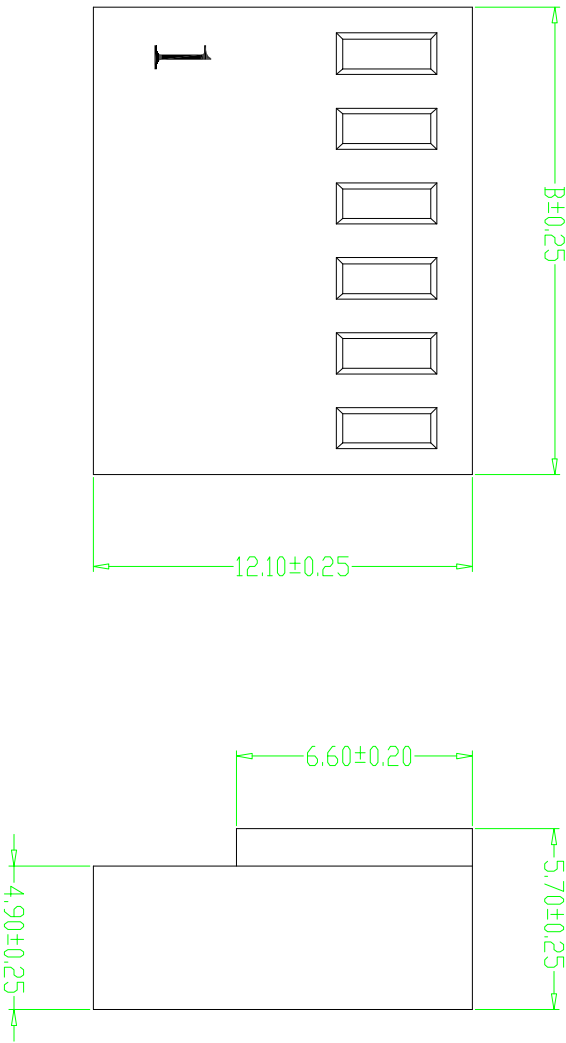

编 号	尺寸 (mm)	
	A	B
A2542-02Y	2.54	5.68
A2542-03Y	5.08	8.22
A2542-04Y	7.62	10.76
A2542-05Y	10.16	13.30
A2542-06Y	12.70	15.84
A2542-07Y	15.24	18.38
A2542-08Y	17.78	20.92
A2542-09Y	20.32	23.46
A2542-10Y	22.86	26.00
A2542-11Y	25.40	28.54
A2542-12Y	27.94	31.08
A2542-20Y	48.26	51.40

单位	UNIT	mm	泰华电子有限公司 TaiHua Electronics Co., Ltd		
比例	SCALE				
$x \pm 0.5$	$x \pm$	核准:	版本:	A0	产品名称
$x \pm 0.30$	$x \pm$	APPROVED BY	页次:	1/1	2510孔座
$.xx \pm 0.20$	$.xx \pm$	审核:	日期:		产品料号
$.xxx \pm 0.005, xxx \pm$	$.xxx \pm$	CHECKED BY	制图:	封文卿	TH-A2542-NY
		DRAWN BY	2022.8.1	客户料号	
				Client No	