
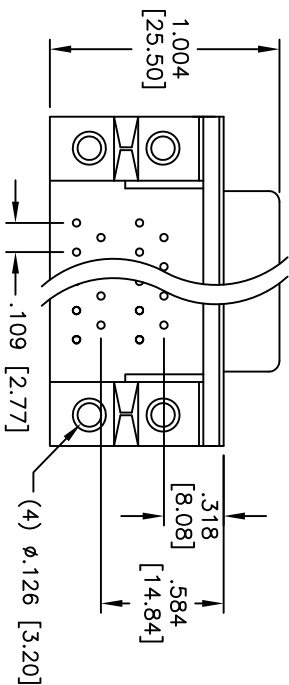


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/05	

APPROVED: _____

DATE: _____ TITLE: _____

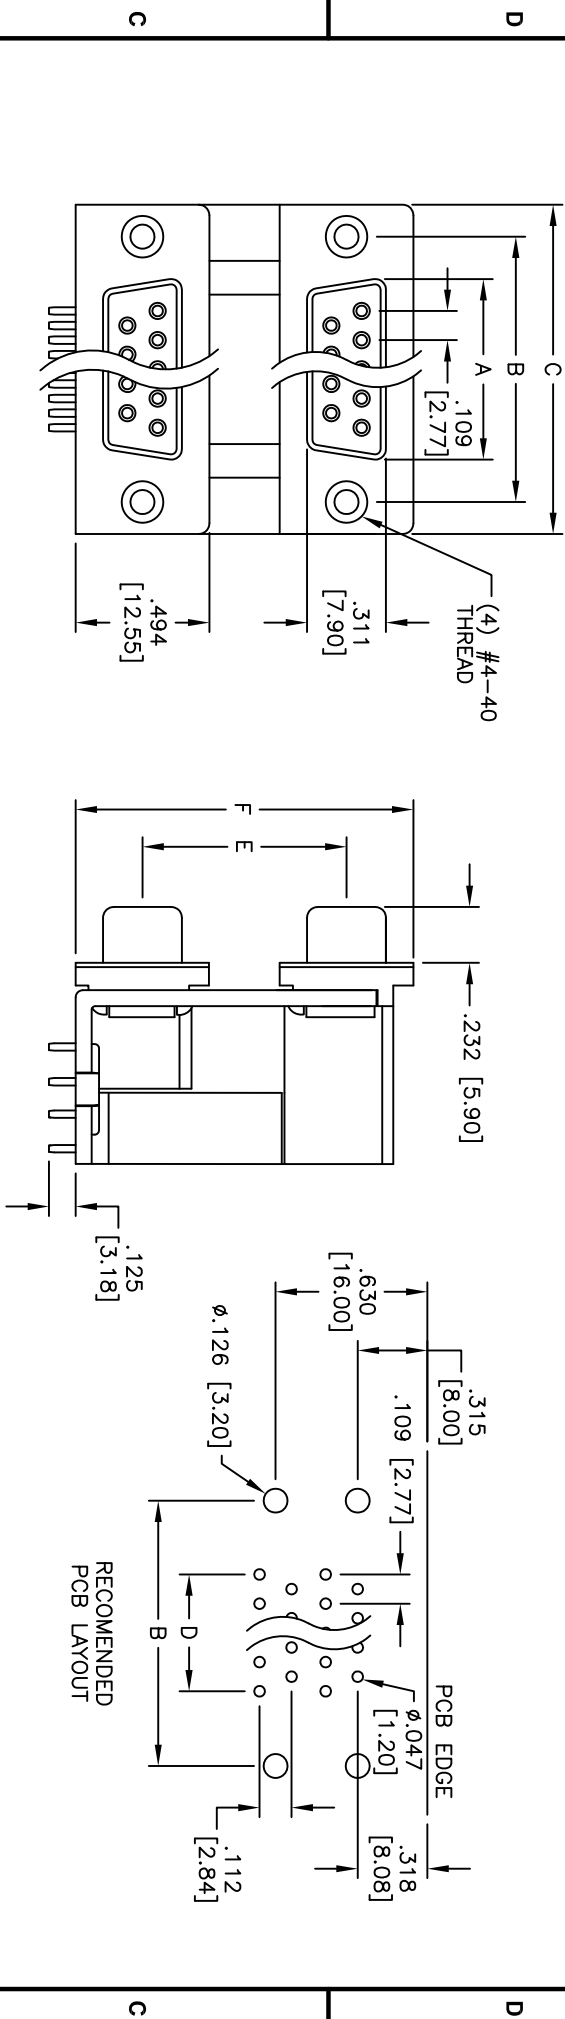

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Zinc plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 5 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

	PORT SPACING	PLUG DIMENSIONS			
		E	F		
A1	.900 [22.86]	.900 [22.86]	1.394 [35.41]		
B1	.750 [19.05]	.750 [19.05]	1.244 [31.60]		
C1	.625 [15.88]	.625 [15.88]	1.119 [28.43]		

POSITIONS	DIMENSIONS			
	A	B	C	D
9	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.436 [11.08]
15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	.763 [19.39]
25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.309 [33.24]
37	2.160 [54.84]	2.500 [63.50]	2.729 [69.32]	1.963 [49.86]

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES .X ± .10 .XX ± .020 .XXX ± .015		DUAL PORT D-SUB, FEMALE / FEMALE	
HOLE ØX ± .10 ØXX ± .015 ØXXX ± .010		.126 [3.20] THROUGH HOLES	
APPROVALS		DATE	
DRAWN SS		6/10/05	
CHECKED		SIZE	
APPROVED		X PART NO. DPD-XX-00-X1	
REF:		SCALE: NTS	
		SHEET 1 OF 1	