



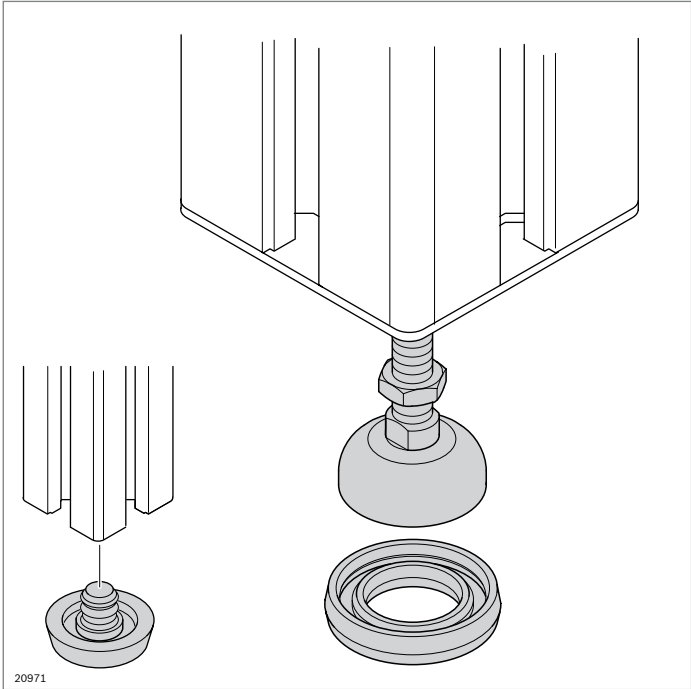


Leveling foot, foot, damping ring




- Leveling foot**
 - For compensating irregularities in the floor up to 5°
 - Fully assembled spindle and base plate
 - Profile finishing: thread in central hole
- Damping ring**
 - The electrically insulating damping ring prevents the transfer of vibrations and allows a defined conduction of voltages via a set of grounding components (p. 17-2)

Optional accessories:
bearing ring (p. 6-16), for when cover caps with a hole are used



Leveling foot	M	D (mm)	L (mm)	No.
	M6	20	41	20 3 842 518 743

Material: steel/plastic



Leveling foot	F (N)	M	D (mm)	L (mm)	V (mm)	ESD	No.
	5000	M8	30	65	15		20 3 842 502 257
	8000	M12	30	72	14		20 3 842 529 025

Material: steel; galvanized