

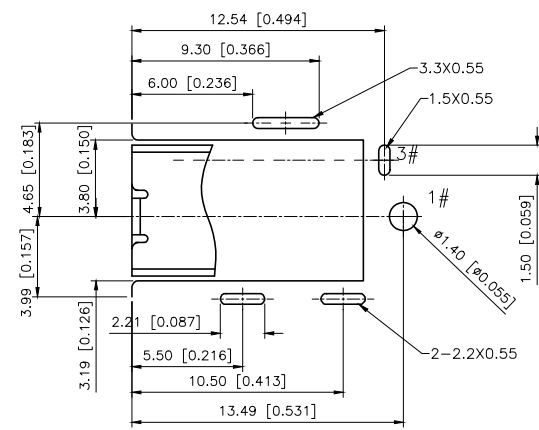

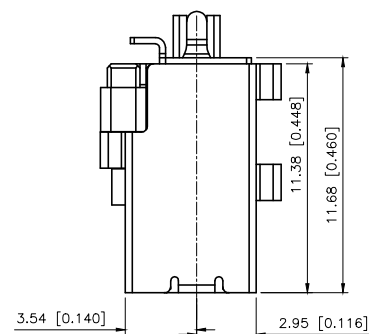
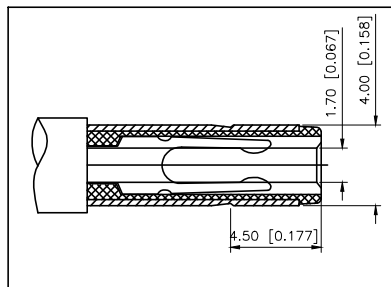


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

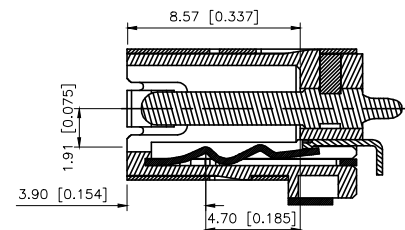


P.C.B LAYOUT




- SPECIFICATION
- 1.Rating : DC 20V 7A;
 - 2.Contact resistance: 30mΩ;
 - 3.Insulation resistance: ≥100MΩ (DC250V);
 - 4.Withstand voltage;500VAC
 - 5.Insertion and extraction force:5-30N;
 - 6.life test:5000 cycles.
 - 7.PLUG插入后上下左右4个方向无瞬断现象。

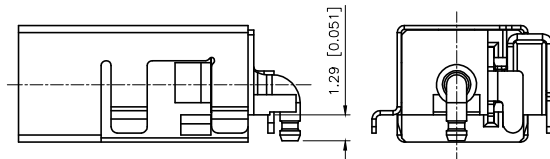


SECTION A-A



Terminal 3	Phosphor Bronze	TIN
Terminal 2	Phosphor Bronze	TIN
Terminal 1	Phosphor Bronze	TIN
Center pin	Brass	TIN
Coat	SUS	
Plastic	PA9T	
PAPT NAMF	MATERIAL	PLATING

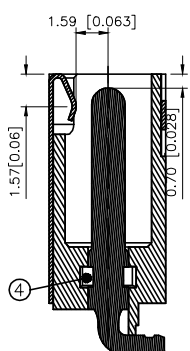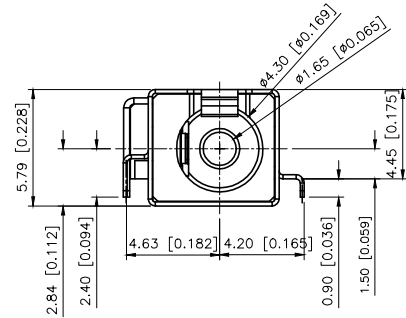

SECTION B-B

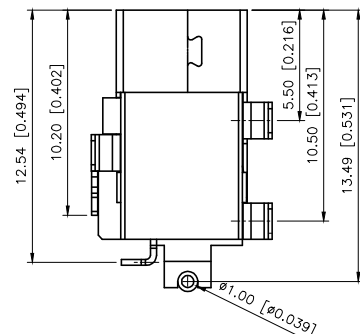

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	DC POWER JACK
APPROVED		SIZE: A4	PART NO.:
			DC-C024E-7A-1.65
			DWG NO.: