



LED cover for position switch Metal 3SE51 2 LEDs, yellow/green, 24 V DC
Color turquoise

product designation

cover with LED 24 V DC, for wide enclosures for position switch, metal, turquoise

General technical data	
degree of pollution	class 3
protection class IP	IP66/IP67
shock resistance	
• acc. to IEC 60068-2-27	30g / 11 ms
vibration resistance acc. to IEC 60068-2-6	0.35 mm/5g
length of the sensor	78 mm
width of the sensor	56 mm
design of the interface for safety-related communication	without
Enclosure	
design of the housing	block, wide
coating of the enclosure	cathodic immersion coating
Drive Head	
design of the actuating element	Other, without, cover
Communication/ Protocol	
design of the interface	without
Ambient conditions	
explosion protection category for dust	none
Supply voltage	
type of voltage of the supply voltage of the optional LED display	DC
supply voltage	
• of LED	24 V
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw fixing
Certificates/ approvals	
General Product Approval	Functional Safety/Safety of Machinery



[Type Examination Certificate](#)

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------

[Miscellaneous](#)



[Type Test
Certificates/Test
Report](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5120-1AA00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5120-1AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5120-1AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5120-1AA00&lang=en

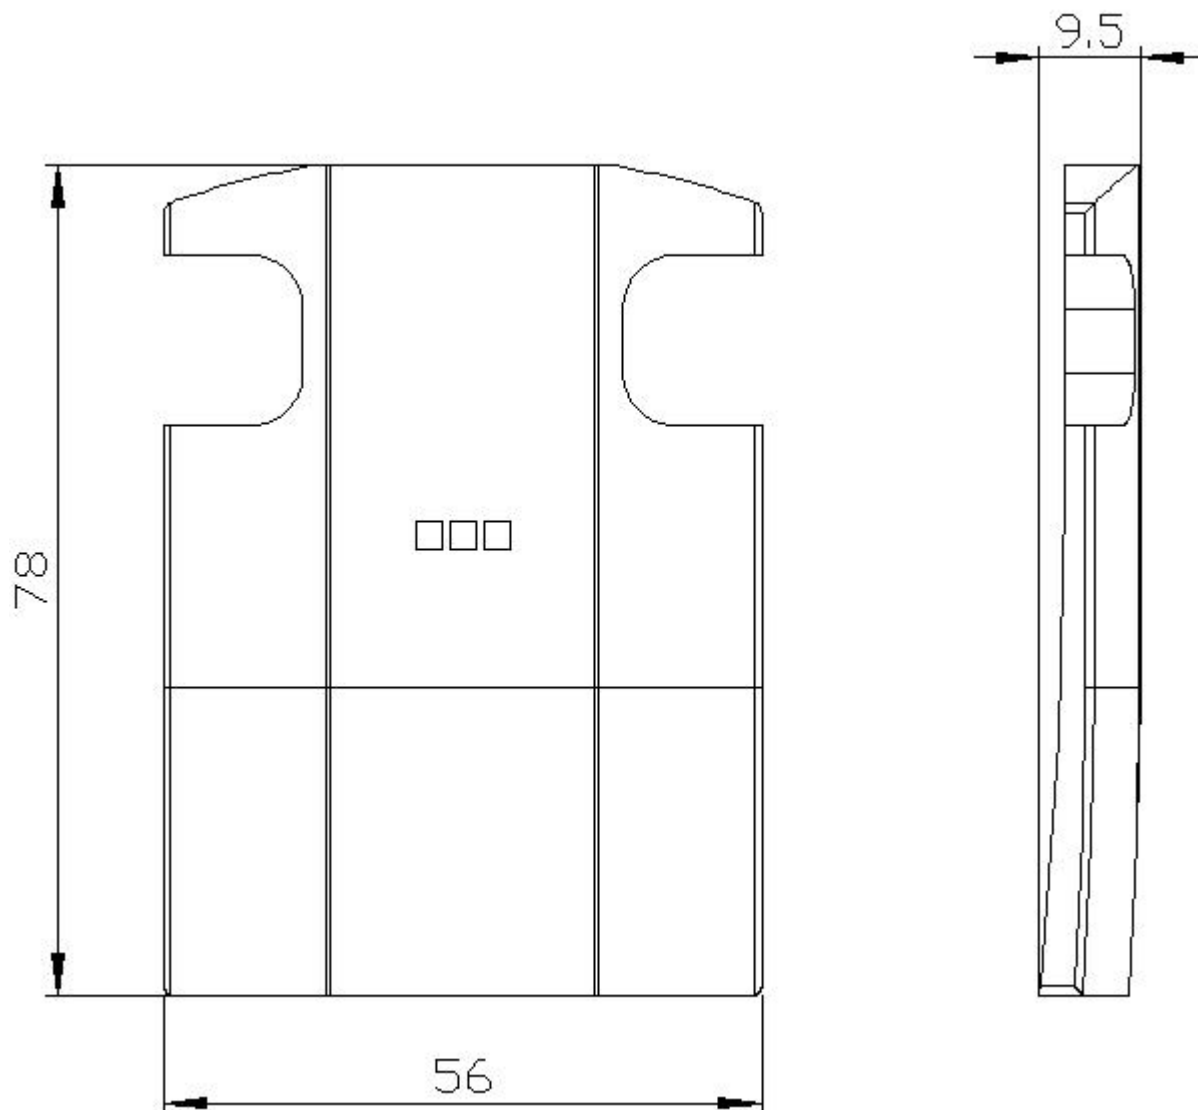

last modified:

8/31/2020 