


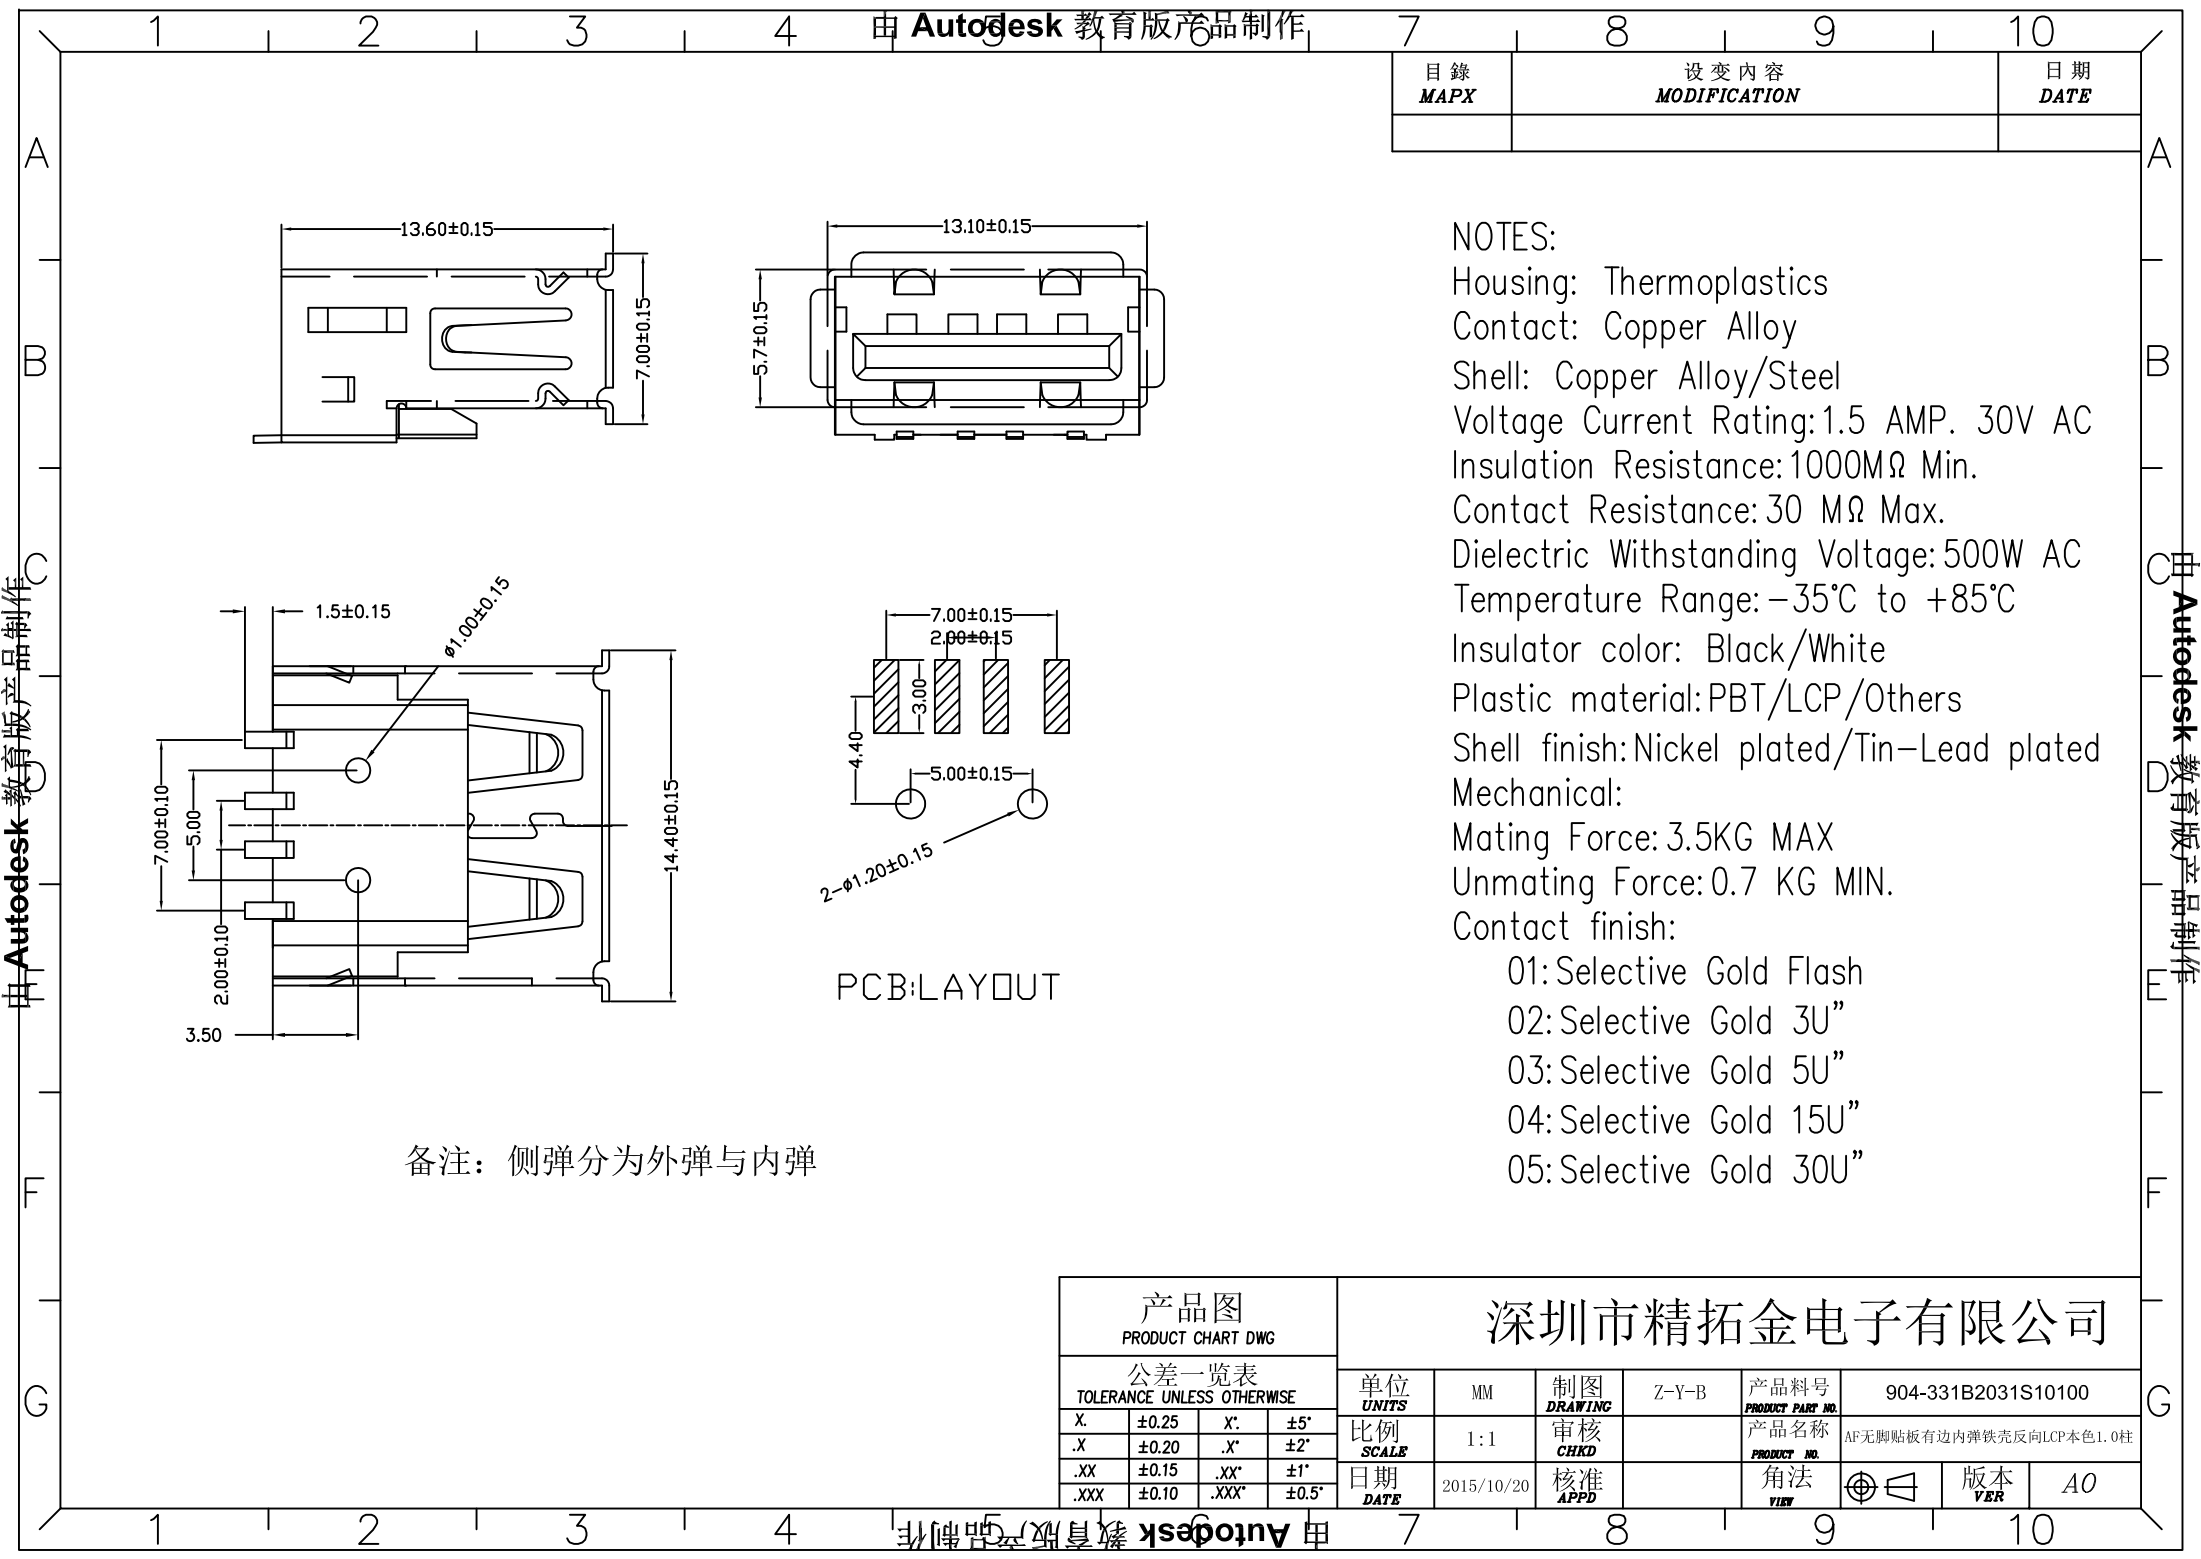

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 30 M Ω Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35 $^{\circ}$ C to +85 $^{\circ}$ C

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	904-331B2031S10100
X.	± 0.25	X'.	$\pm 5^{\circ}$	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF无脚贴板有边内弹铁壳反向LCP本色1.0柱
.X	± 0.20	.X'	$\pm 2^{\circ}$						
.XX	± 0.15	.XX'	$\pm 1^{\circ}$	日期 DATE	2015/10/20	核准 APPD		角法 VIEW	
.XXX	± 0.10	.XXX'	$\pm 0.5^{\circ}$					版本 VER	A0