

#### NOTES:

##### 1. MATERIAL:


HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 PC PINS: STEEL, NICKEL PLATED  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 CONTACTS: SPRING STEEL, NICKEL PLATED.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000


ROHS 2 COMPLIANT

#### MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD  
 BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT.  
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/24/06	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL NOTES	T.B.	B.S.	
4/05/13	B	UPDATED TO "ROHS 2 COMPLIANT" UPDATED DIVIDING RIBS	T.B.	B.S.	
06/14/13	C	UPDATED TITLE	T.B.	B.S.	
07/07/17	D	DIM. 38.0 WAS 37.0 DIM. 2.48 WAS 2.82 DIM. 11.10 WAS 12.32	T.B.	B.S.	
0722/17	E	DIM. 0.50 WAS 0.51, DIM. 0.85 WAS 1.02	T.B.	B.S.	

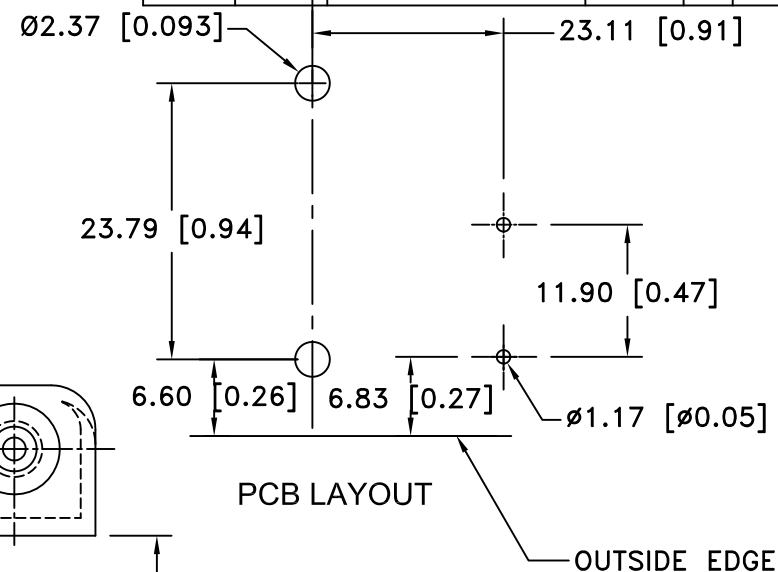

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)			Scale Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title THREE "AAA" CELL HOLDER WITH PC PINS		
Angular ± 3°	Date 07/22/17	Drawing Number BC3AAAPC	