


| Date | SYM | REVISION | RECORD | AUTH | DR. | CK. |
|------|-----|----------|--------|------|-----|-----|
|      |     |          |        |      |     |     |
|      |     |          |        |      |     |     |
|      |     |          |        |      |     |     |
|      |     |          |        |      |     |     |
|      |     |          |        |      |     |     |

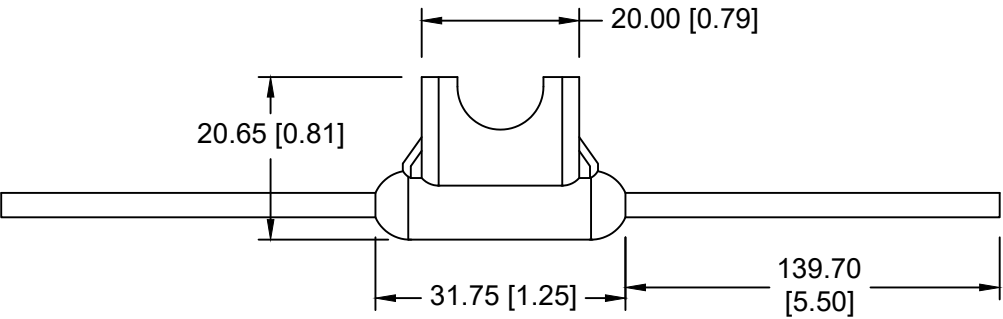

NOTES:

1. MATERIAL:  
HOUSING : NYLON 66 ,UL94V-2, FILE NO. E41938
  2. WIRE: RED WIRE, 16 AWG, UL 1015, 600V, 105°C,  
FLAME RATED VW-1, UL FILE NO. E193578 OR ENGINEERING  
APPROVED EQUIVALENT
  3. RATED CURRENT: 30A
  4. ACCEPTS ATM/ASP FUSES
  5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
  6. CONTACT RESISTANCE: 5mΩ AT 1A DC
  7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS 2 COMPLIANT

|                                |                                                                                                                                                            |                          |                  |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|
| Tolerance<br>(Except as noted) | <div><div><div></div><div></div><div></div></div><div>MPD</div></div> Memory Protection Devices, Inc<br>200 Broad Hollow Road, Farmingdale, New York 11735 |                          |                  |
| decimal<br>±.5 (.020)          |                                                                                                                                                            | Scale                    | Drawn By B.S.    |
|                                |                                                                                                                                                            |                          | Approved By T.B. |
| Fractional<br>± .8 (.030)      | Title<br>INLINE FUSE HOLDER                                                                                                                                |                          |                  |
| Angular<br>± 3°                | Date<br>11/24/17                                                                                                                                           | Drawing Number<br>BF356S |                  |