

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/31/17	F	DIM. 27.20 WAS 26.50 DIM. 36.00 WAS 35.60 DIM. 69.10 WAS 68.70 DIM. 150.0 WAS 152.40 DIM. 5.0 WAS 3.18 ADDED MOUNTING HOLES	T.B.	B.S.	
04/07/17	G	ADDED BOTTOM VIEW	T.B.	B.S.	
04/14/17	H	DIM. 23.75 WAS 20.45	T.B.	B.S.	

# NOTES:

## 1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C





RIVETS: BRASS, NICKLE PLATED.

SPRING: SPRING STEEL, NICKLE PLATED.

WIRES: 26 AWG, UL1007,CSA, TR-64, 300V, 80°C

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
EIA-540J000

ROHS 2 COMPLIANT.

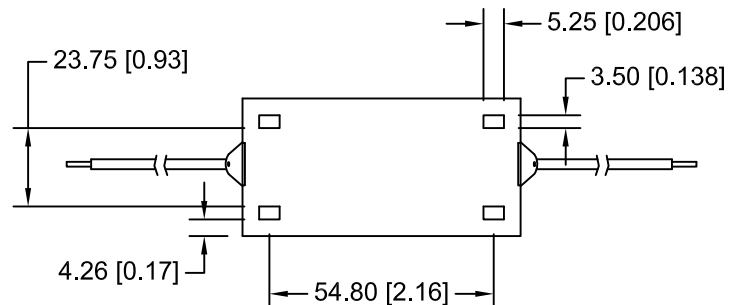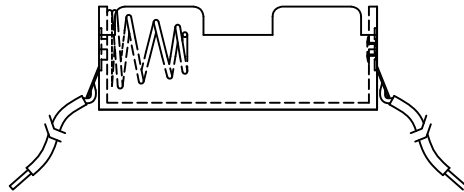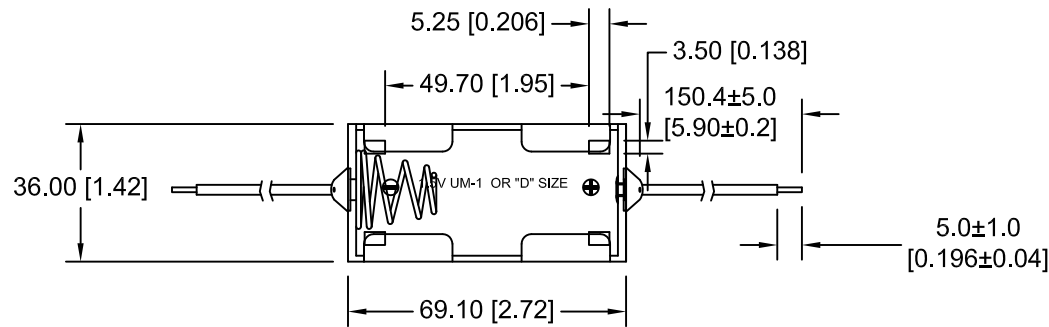

Tolerance (Except as noted)	<div> <div> <div></div> <div>MPD</div> </div> <div> <div>Memory Protection Devices, Inc</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div> </div> </div>		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title ONE "D" CELL HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 04/14/17	Drawing Number BHDW	