


## 27 Relampable Indicator Lights and Sockets

All Dimensions Are In Inches (mm)

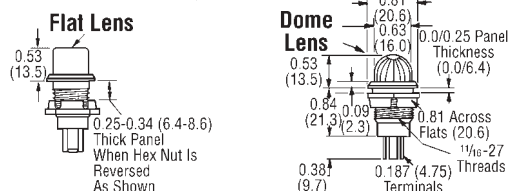

**Ordered Separately:** Relampable incandescent indicator light, 1/16" diameter mounting hole. **Select:** 1) T-2 telephone slide base lamp, page 1531 fig. 16; 2) Choice of 2 sockets below; 3) Lens, choose dome or flat.

### Sockets

**Features:** Mounting: Supplied with polyester hex nut. **Body:** Black polyester. **Terminals:** Nickel-plated brass.

| Stock No. | Mfr.'s Type | Bezel                    | EACH |       |       |         |         |
|-----------|-------------|--------------------------|------|-------|-------|---------|---------|
|           |             |                          | 1-24 | 25-49 | 50-99 | 100-499 | 500-999 |
| 679-7761  | 2802*       | Black                    | 2.29 | 2.09  | 1.98  | 1.87    | 1.53    |
| 679-7762  | 2803†       | Polished Stainless Steel | 2.59 | 2.35  | 2.23  | 2.11    | 1.73    |

\*With flat lens. †With dome lens.


### Lens



| Lens Color | Dome Lens |             | Flat Lens |             | EACH |       |       |         |         |
|------------|-----------|-------------|-----------|-------------|------|-------|-------|---------|---------|
|            | Stock No. | Mfr.'s Type | Stock No. | Mfr.'s Type | 1-24 | 25-49 | 50-99 | 100-499 | 500-999 |
| Red        | 679-7763  | 2811        | 679-0215  | 2851        | .50  | .46   | .43   | .41     | .33     |
| Clear      | 679-0200  | 2812        | 679-0220  | 2852        | .50  | .46   | .43   | .41     | .33     |
| Amber      | 679-7765  | 2813        | 679-0225  | 2853        | .50  | .46   | .43   | .41     | .33     |
| White      | 679-0205  | 2814        | 679-0230  | 2854        | .50  | .46   | .43   | .41     | .33     |
| Green      | 679-9815  | 2815        | 679-0235  | 2855        | .50  | .46   | .43   | .41     | .33     |
| Blue       | 679-0005  | 2816        | 679-0240  | 2856        | .50  | .46   | .43   | .41     | .33     |
| Yellow     | 679-0210  | 2817        | —         | —           | .50  | .46   | .43   | .41     | .33     |

## Miniature Relampable Indicator Lights

The Chicago Miniature Lamp Miniature Indicator Lights are versatile, industry standard, front panel indicators capable of accepting a variety of T-2 and T-3 1/4 miniature bayonet based incandescent and neon lamps. Available in the deluxe 5200 Series and the very cost efficient 5100 Series. These indicator lights accept a variety of different lens styles and colors, and are excellent for providing a large, bright, easily noticed status indicator. The lamp is not included with this indicator light; please order the required lamp separately.

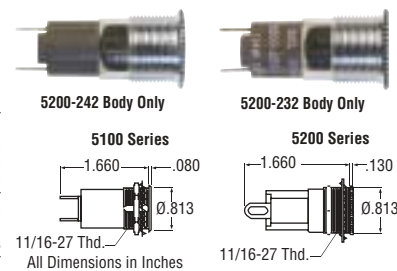

### 5100 Series

**Mounting Hole:** 0.688 **Mounting Centers:** 0.969 **Maximum Panel Thickness:** 0.406. **Housing/Lens Material:** Glass-filled polyester. **Bezel:** Stainless steel. **Hex Nut:** Zinc plated steel. **Lockwasher:** Chromate treated steel. **Lenses:** High temperature lexan. **Approvals:** UL Listed, CSA Certified (except Q.C. terminal versions) **Electrical Rating:** Up to 250 volts, up to 3 watts (contact factory for specific product rating).

| Stock No. | Mfr.'s Type | Max. Volts | Max. Amps | Terminals   | EACH |       |       |         |         |
|-----------|-------------|------------|-----------|-------------|------|-------|-------|---------|---------|
|           |             |            |           |             | 1-24 | 25-49 | 50-99 | 100-499 | 500-999 |
| 749-0599  | 5100-822    | 120        | 0.170     | Solder Lugs | 3.27 | 2.98  | 2.82  | 2.67    | 2.06    |
| 749-0598  | 5100-824    | 120        | 0.170     | 0.250" Q.C. | 3.04 | 2.77  | 2.62  | 2.48    | 1.91    |
| 749-9909  | 5100-823    | 120        | 0.170     | Screw Lugs  | 6.79 | 6.18  | 5.85  | 5.54    | 4.27    |


### 5200 Series

|          |           |     |       |             |       |       |      |      |      |
|----------|-----------|-----|-------|-------------|-------|-------|------|------|------|
| 749-0565 | 5200-222  | 120 | 0.170 | Solder Lugs | 9.61  | 8.74  | 8.28 | 7.83 | 6.41 |
| 749-0575 | 5200-232* | 125 | 1.800 | Solder Lugs | 8.78  | 7.98  | 7.56 | 7.16 | 5.85 |
| 749-0585 | 5200-242* | 250 | 1.800 | Solder Lugs | 11.09 | 10.08 | 9.55 | 9.04 | 7.39 |

\*Supplied with built-in integral resistor for use with based neon lamp.

### Polycarbonate Lenses

Use only transparent, or fluted lens with neon lamps, ordered separately above. Specify color choice when ordering. Replace X in stock number with following color code — 1=Amber, 3=Clear, 4=Green, 5=Red, 6=White, 7=Yellow.



| Stock No. | Mfr.'s Type | Fig. | Colors Available | EACH |       |       |         |         |
|-----------|-------------|------|------------------|------|-------|-------|---------|---------|
|           |             |      |                  | 1-24 | 25-49 | 50-99 | 100-499 | 500-999 |
| 749-020X  | 25P-306     | 1    | R, A, G, C       | .50  | .46   | .43   | .41     | .33     |
| 749-004X  | 25P-307     | 1    | R, Y, G, W       | .50  | .46   | .43   | .41     | .33     |
| 749-006X  | 25P-326     | 2    | R, A, G, C       | .50  | .46   | .43   | .41     | .33     |
| 749-007X  | 25P-606     | 3    | R, A, G, C       | .50  | .46   | .43   | .41     | .33     |
| 749-008X  | 25P-607     | 3    | R, Y, G, W       | .48  | .43   | .41   | .39     | .32     |
| 749-065X  | 25P-626     | 4    | R, A, G, C       | .50  | .46   | .43   | .41     | .33     |

# can't find it? look online!

With over 400,000 parts available online, we have everything in here and a whole lot more!

**Part Search. Part Found.**



**alliedelec.com**