

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, Screw locking mechanism, No. of pos. : 16, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, cable diameter range: 4 mm ... 6 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243784

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Crimping connection: vibration- and temperature-resistant assembly

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1619732 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AB31 |
| Product key | ABRAEA |
| GTIN | 4046356821858 |
| Weight per piece (including packing) | 92.8 g |
| Weight per piece (excluding packing) | 86.217 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Technical data

Notes

| | |
|--------------------|--|
| Order information: | Order 6 x Ø 1 mm crimp contacts separately |
|--------------------|--|

Product properties

| | |
|--------------|---------------------------------|
| Product type | Circular connector (cable-side) |
|--------------|---------------------------------|

Connector

Connection 1

| | |
|-------------|--------|
| Head design | Socket |
|-------------|--------|

Insulating body

| | |
|------------------------------------|---|
| Note | Order information: Order 6 x Ø 1 mm crimp contacts separately |
| Coding | N |
| Insulation body material | PA 6.6 |
| Connection method | Crimp connection |
| Contact switching type | Socket |
| Application | Signal |
| Number of positions | 16 |
| Direction of rotation | Standard |
| Connection profile | 16 |
| Contact diameter | 1 mm |
| Litz wire cross-section | 0.08 mm ² |
| Litz wire cross-section | 1 mm ² |
| Nominal current per signal contact | 8 A |
| Rated voltage Signal contact | 48 V AC |
| Rated surge voltage | 1.5 kV |
| Overvoltage category | III |
| Degree of pollution | 3 |

Housing

| | |
|-----------------------------------|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking | Screw locking mechanism |
| Pg screw connection | none |
| Degree of protection (plugged in) | IP67 |
| Thread type | M23 |

Seal

| | |
|-------------------------|---------------|
| External cable diameter | 4 mm ... 6 mm |
| Seal material | NBR |

Environmental and real-life conditions

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Ambient conditions

| | |
|--|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Ambient temperature (storage/transport) | 15 °C ... 25 °C |
| Permissible humidity (storage/transport) | 50 % ... 65 % |

CA-16S1N8A8006 - Cable connector


1619732

<https://www.phoenixcontact.com/us/products/1619732>



Drawings

Dimensional drawing

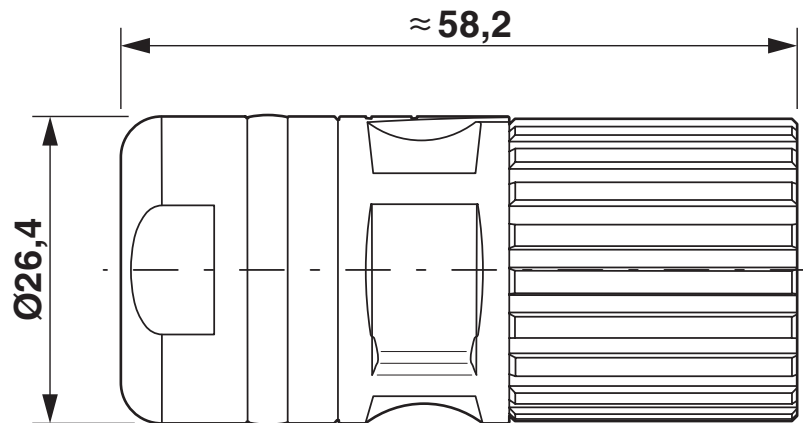

Technical drawings can be found under Downloads

CA-16S1N8A8006 - Cable connector





1619732

<https://www.phoenixcontact.com/us/products/1619732>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619732>

| | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  cUL Recognized Approval ID: E335019-20141210 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 3 A | 20 - 20 | - |

| | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|  UL Recognized Approval ID: E335019-20141210 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 5 A | 20 - 20 | - |

| | | | | |
|-------------------------|--|--|--|--|
| cULus Recognized | | | | |
|-------------------------|--|--|--|--|

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | d4d86b9f-df82-4ddf-9234-fca11a28be2d |

CA-16S1N8A8006 - Cable connector



1619732

<https://www.phoenixcontact.com/us/products/1619732>

Accessories

RC-11S2000 - Crimp contact

1596772

<https://www.phoenixcontact.com/us/products/1596772>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm² ... 0.22 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

RC-12S2000 - Crimp contact

1599600

<https://www.phoenixcontact.com/us/products/1599600>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm² ... 0.56 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

CA-16S1N8A8006 - Cable connector

1619732

<https://www.phoenixcontact.com/us/products/1619732>



RC-1KS2000 - Crimp contact

1602998

<https://www.phoenixcontact.com/us/products/1602998>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.5 mm² ... 1 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241572

CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

CA-16S1N8A8006 - Cable connector

1619732

<https://www.phoenixcontact.com/us/products/1619732>



SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>

Hook wrench, series: RC, UC, RF, SF



CA-16S1N8A8006 - Cable connector



1619732


<https://www.phoenixcontact.com/us/products/1619732>

RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color coding, color: green




RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color coding, color: orange



CA-16S1N8A8006 - Cable connector

1619732

<https://www.phoenixcontact.com/us/products/1619732>



RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color coding, color: black



RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

CA-16S1N8A8006 - Cable connector

1619732

<https://www.phoenixcontact.com/us/products/1619732>



RC-22S2000 - Crimp contact

1603327

<https://www.phoenixcontact.com/us/products/1603327>



Crimp contact, Socket, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.22 mm² ... 0.56 mm², Single contact, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

RC-22S2400 - Crimp contact

1603332

<https://www.phoenixcontact.com/us/products/1603332>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.22 mm² ... 0.56 mm², Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

CA-16S1N8A8006 - Cable connector

1619732

<https://www.phoenixcontact.com/us/products/1619732>



RC-22S2300 - Crimp contact

1603330

<https://www.phoenixcontact.com/us/products/1603330>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: 0.22 mm² ... 0.56 mm², Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/us/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com