


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.01.16	

Specifications(规格):

- 1.Voltage rating (额定电压):500V AC/DC
- 2.Current rating(额定电流):1A AC/DC
- 3.Withstanding voltage(耐压值):≥1000V AC/minute
- 4.Insulation resistance(绝缘电阻):1000MΩ Min
- 5.Contact resistance(绝缘电阻):20mΩ Max
- 6.After environmental testing(环境测试后):30mΩ Max
7. Temperature range(使用温度):-40℃-+105℃







PART NO.:

X9127 W V S-XX A3-9T SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No
- ② Category:W-Aafer
- ③ Welding Board Angle:V-Straight 180°
- ④ Welding Way:S-SMT
- ⑤ Row No-Pin: XX-04P~26P
- ⑥ Special No:A3-Without Ear and boss,with tail and Single Concave
- ⑦ Material:9T-PA9T UL94V-0
- ⑧ Plating:SN-Bright Tin Plated
- ⑨ Color:RE-Red ; RD-Purplish red


X9127WVS-XXA3-9TSNRE	PA6T UL 94V-0	RED	BRASS	TIN/GOLD 1u"
PART NO.	MATERIAL	COLOR	MATERIAL(TERMINAL)	FINISH(TERMINAL)

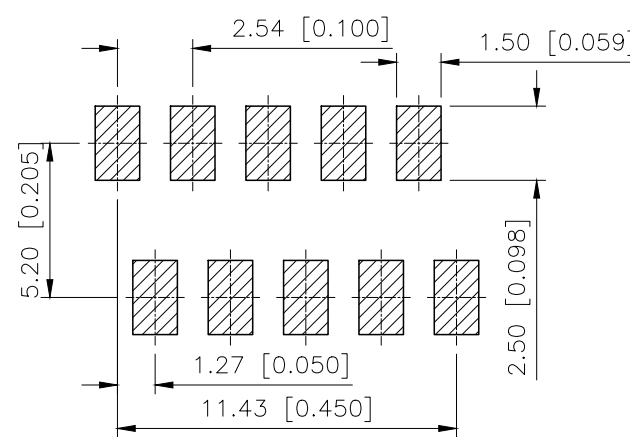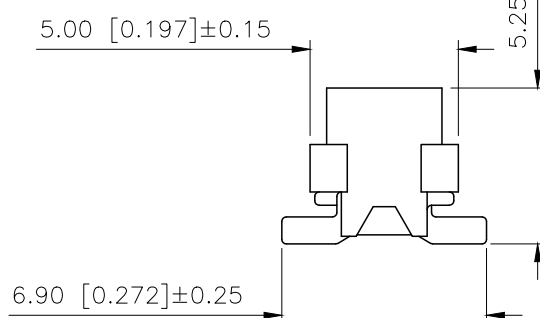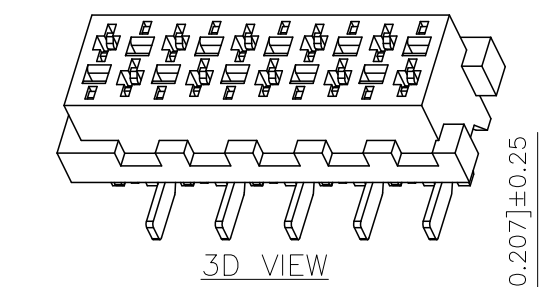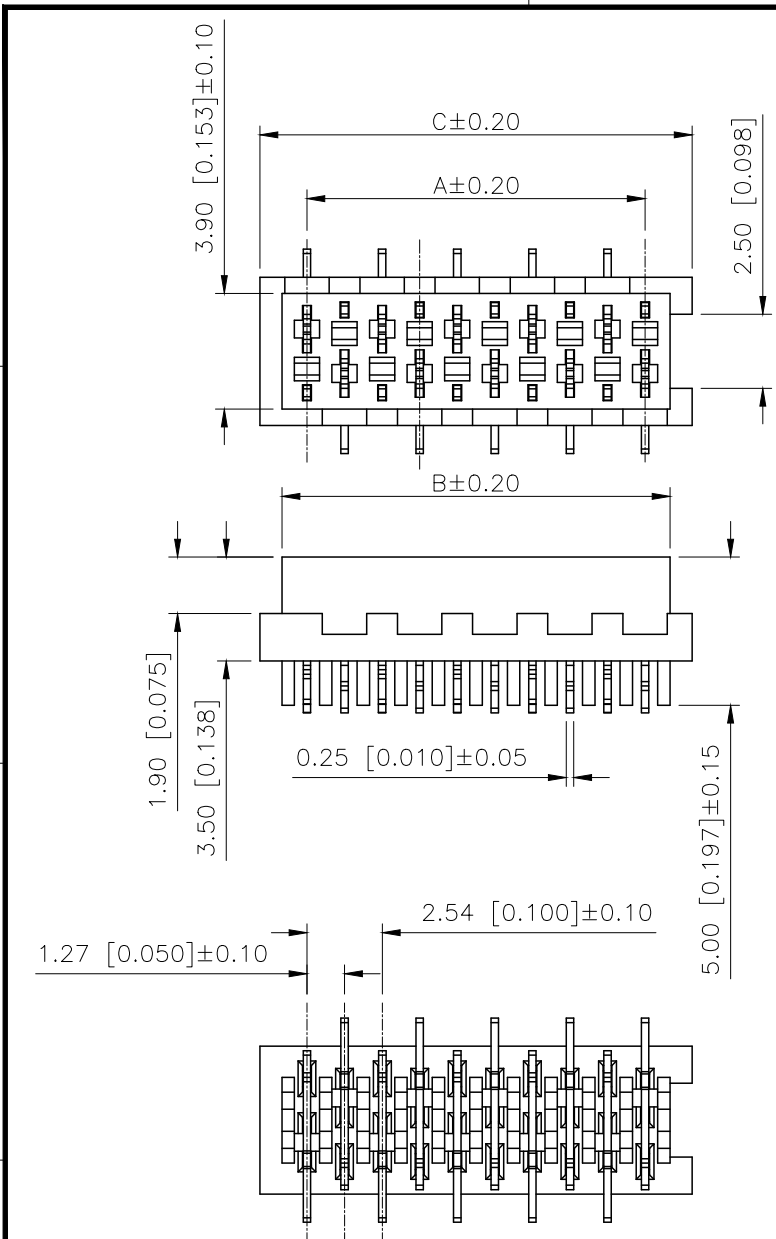

Recommended P.C.B

NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C	NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C
4	3.81	5.50	6.99	16	19.05	20.74	22.23
6	6.35	8.04	9.53	18	21.59	23.28	24.77
8	8.89	10.58	12.07	20	24.13	25.82	27.31
10	11.43	13.12	14.61	22	26.67	28.36	29.85
12	13.97	15.66	17.15	24	29.21	30.90	32.39
14	16.51	18.20	19.69	26	31.75	33.44	34.93

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

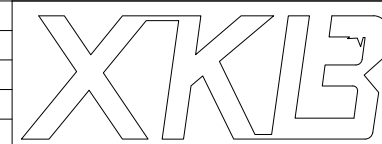

DESIGN	桑 葚	VIEW:		MODEL TYPE:	1.27mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X9127WVS-XXA3-9TSNRE
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0