

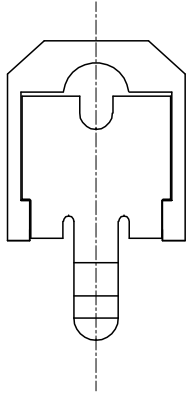
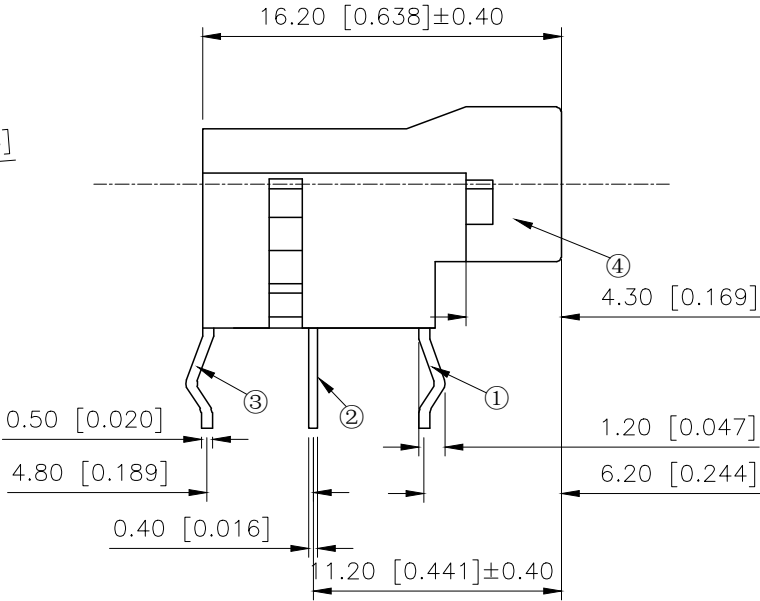
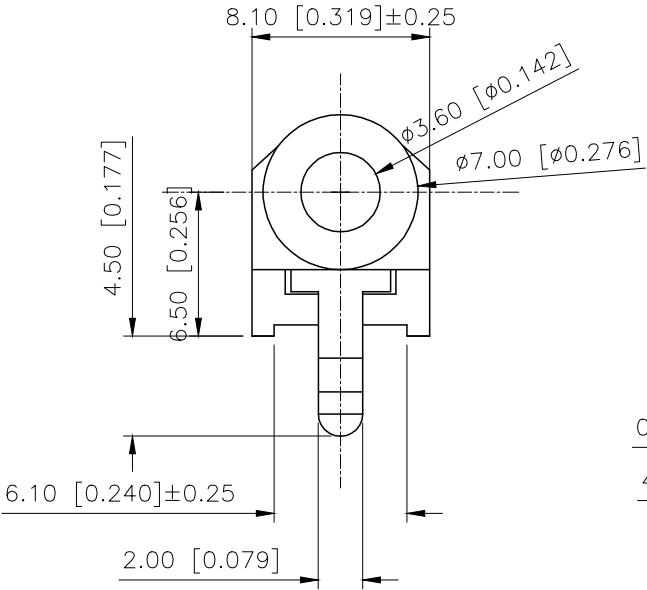


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		参照实物修正图纸, 图面升级整理图面	2024.9.11	阿树

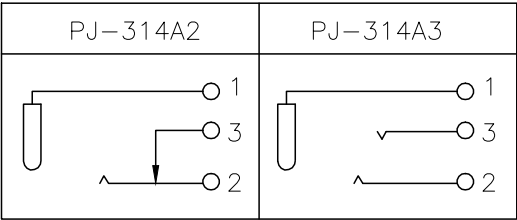

SPECIFICATIONS:
Rating: 16V DC 300mA
Contact resistance: ≤30mΩ
Insulation resistance: ≥50MΩ DC 500V
Withstanding voltage: AC 500V
R.M.A.FOR 1MINUTE
Life test: 5000 CYCLES
Temperature range: -25~+85℃

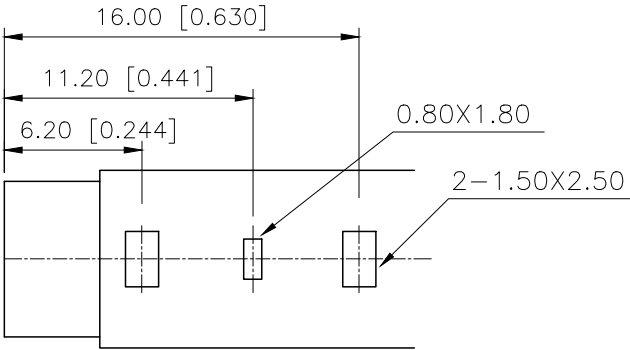

CIRCUIT DIAGRAM

4	Housing	1	PA	Black	tin
3	3# Terminal	1	Brass	T=0.50	tin
2	2# Terminal	1	Phosphor Bronze	T=0.25	tin
1	1# Terminal	1	Brass	T=0.50	tin
NO	PRART NAME	QTY	MATERIAL	SPECIFICATIONS	PLATING

PCB LAYOUT TOP VIEW

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-314AX
APPROVED		SIZE: A4	DWG NO.: