


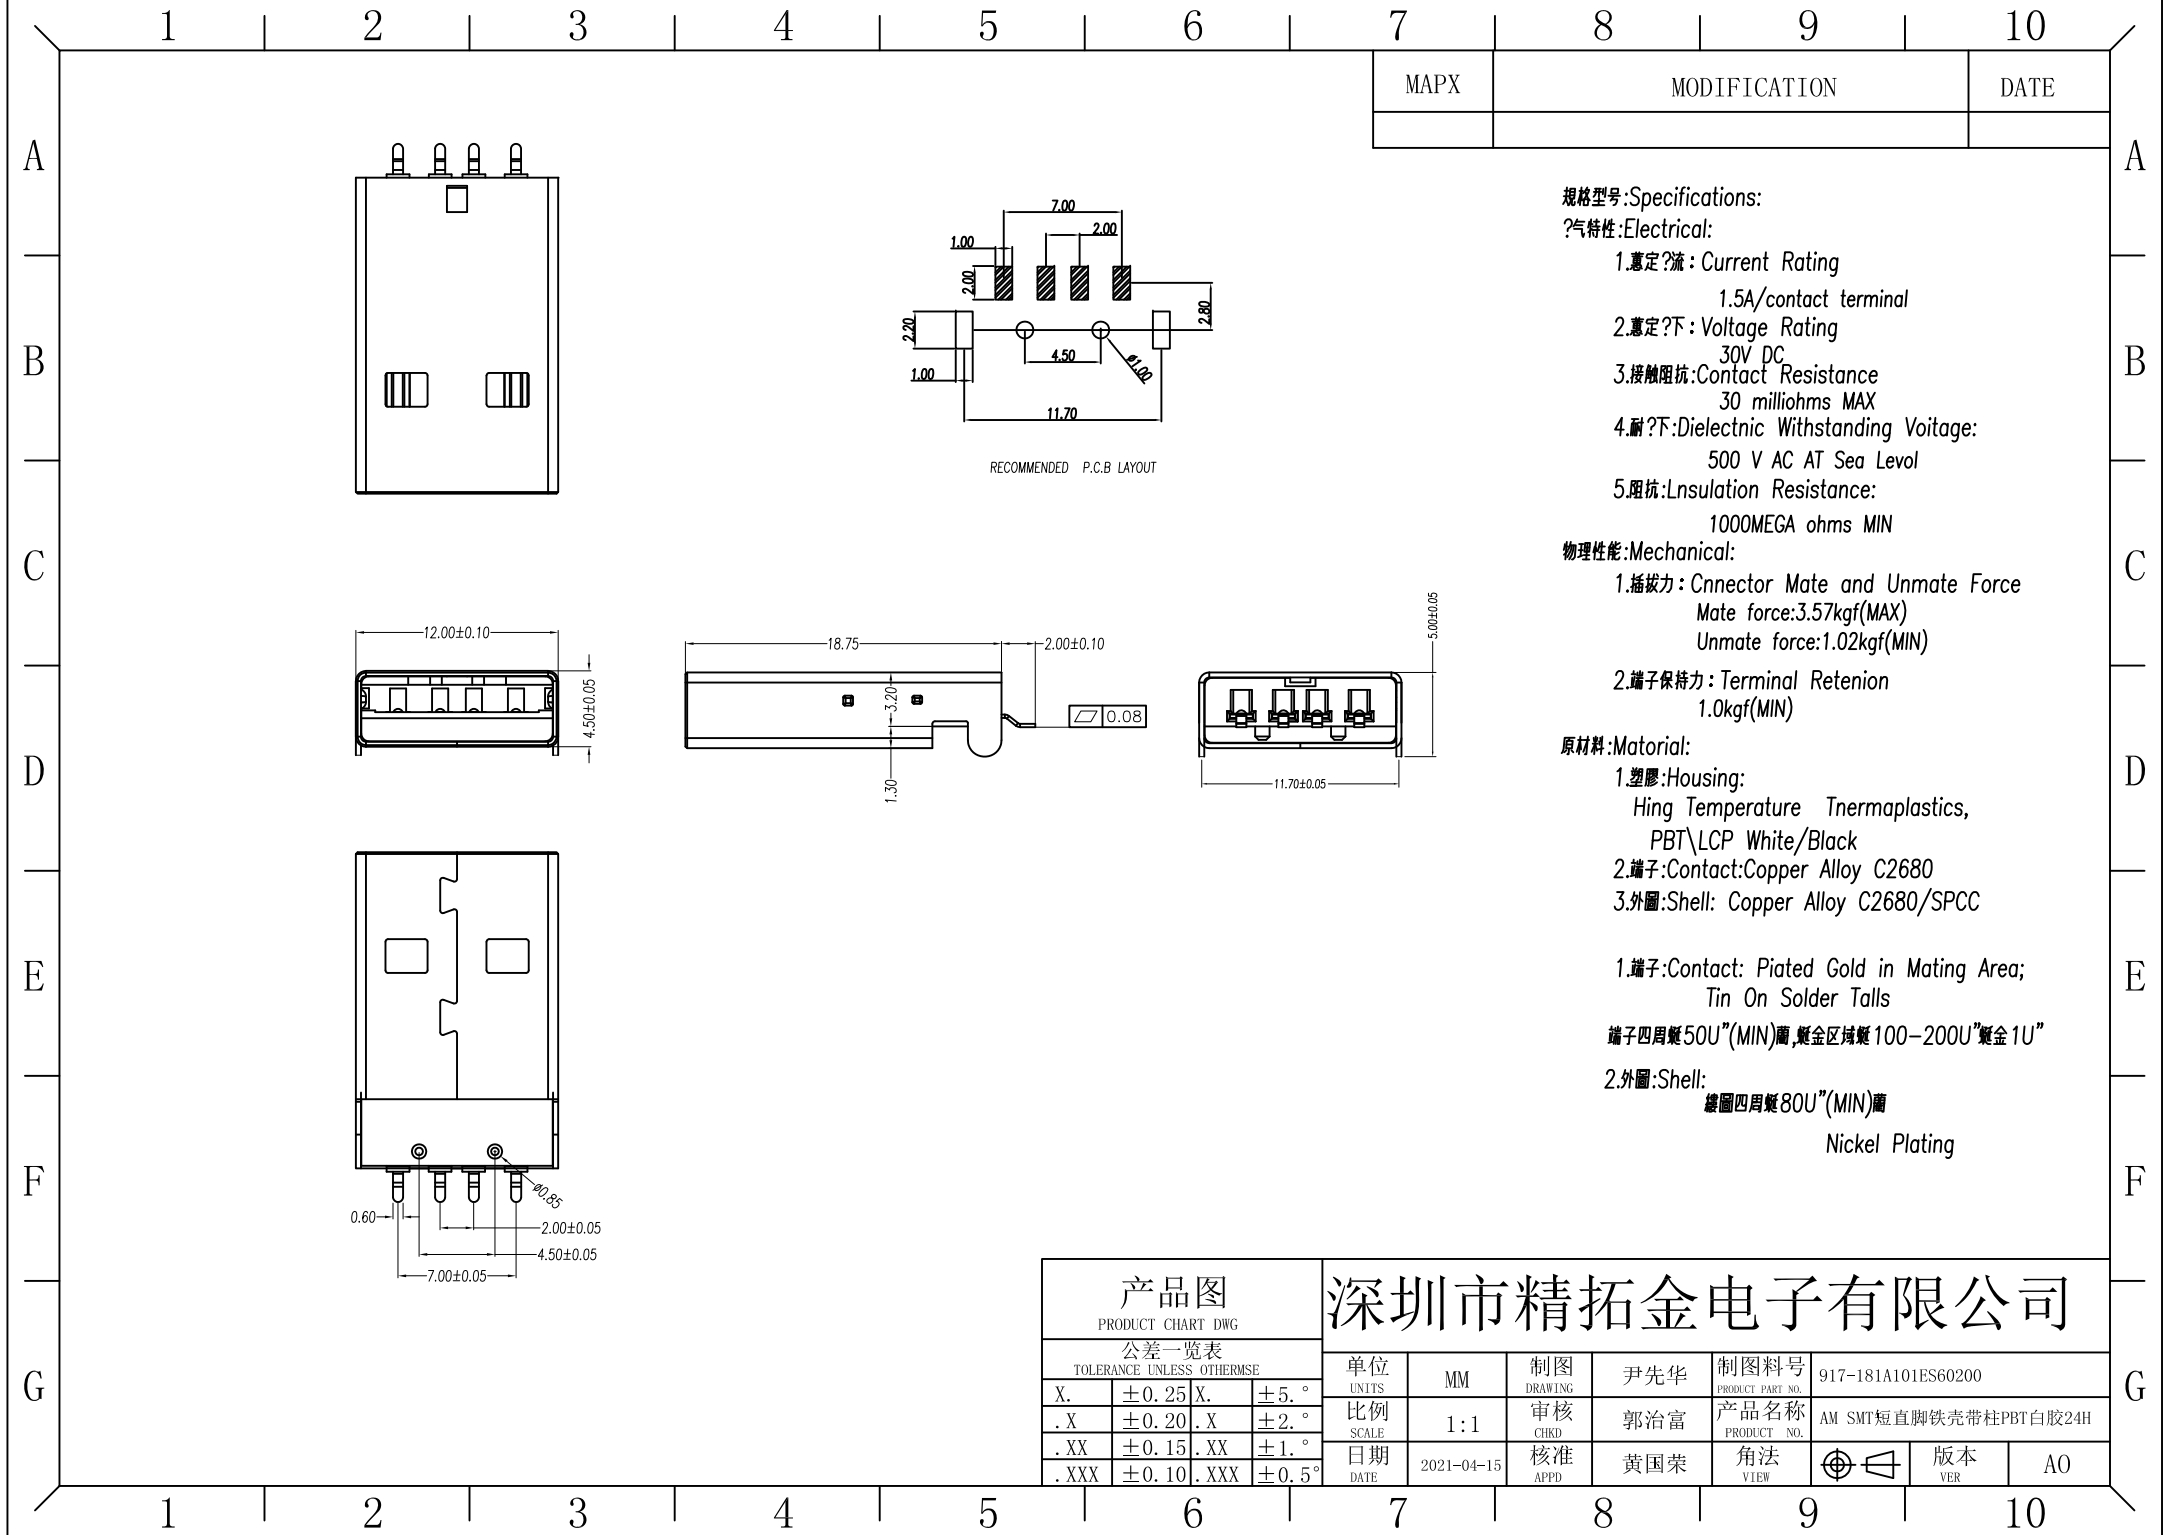

MAPX	MODIFICATION	DATE

- 规格型号:Specifications:
?气特性:Electrical:
- 1.惠定?流: Current Rating
1.5A/contact terminal
 - 2.惠定?下: Voltage Rating
30V DC
 - 3.接触阻抗:Contact Resistance
30 milliohms MAX
 - 4.耐?下:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
 - 5.阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
- 物理性能:Mechanical:
- 1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
 - 2.端子保持力: Terminal Retenion
1.0kgf(MIN)
- 原材料:Material:
- 1.塑膠:Housing:
Hing Temperature Thernmaplastics,
PBT\LCP White/Black
 - 2.端子:Contact:Copper Alloy C2680
 - 3.外圖:Shell: Copper Alloy C2680/SPCC
- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 端子四周鍍50U”(MIN)圖,鍍金区域鍍100-200U”鍍金1U”
- 2.外圖:Shell:
鍍圖四周鍍80U”(MIN)圖
Nickel Plating

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	917-181A101ES60200		
X.	±0.25	X.	±5.°	比例 SCALE	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AM SMT短直脚铁壳带柱PBT白胶24H	
.X	±0.20	.X	±2.°	日期 DATE	核准 APPD	黄国荣	角法 VIEW	版本 VER	AO
.XX	±0.15	.XX	±1.°						
.XXX	±0.10	.XXX	±0.5°						