


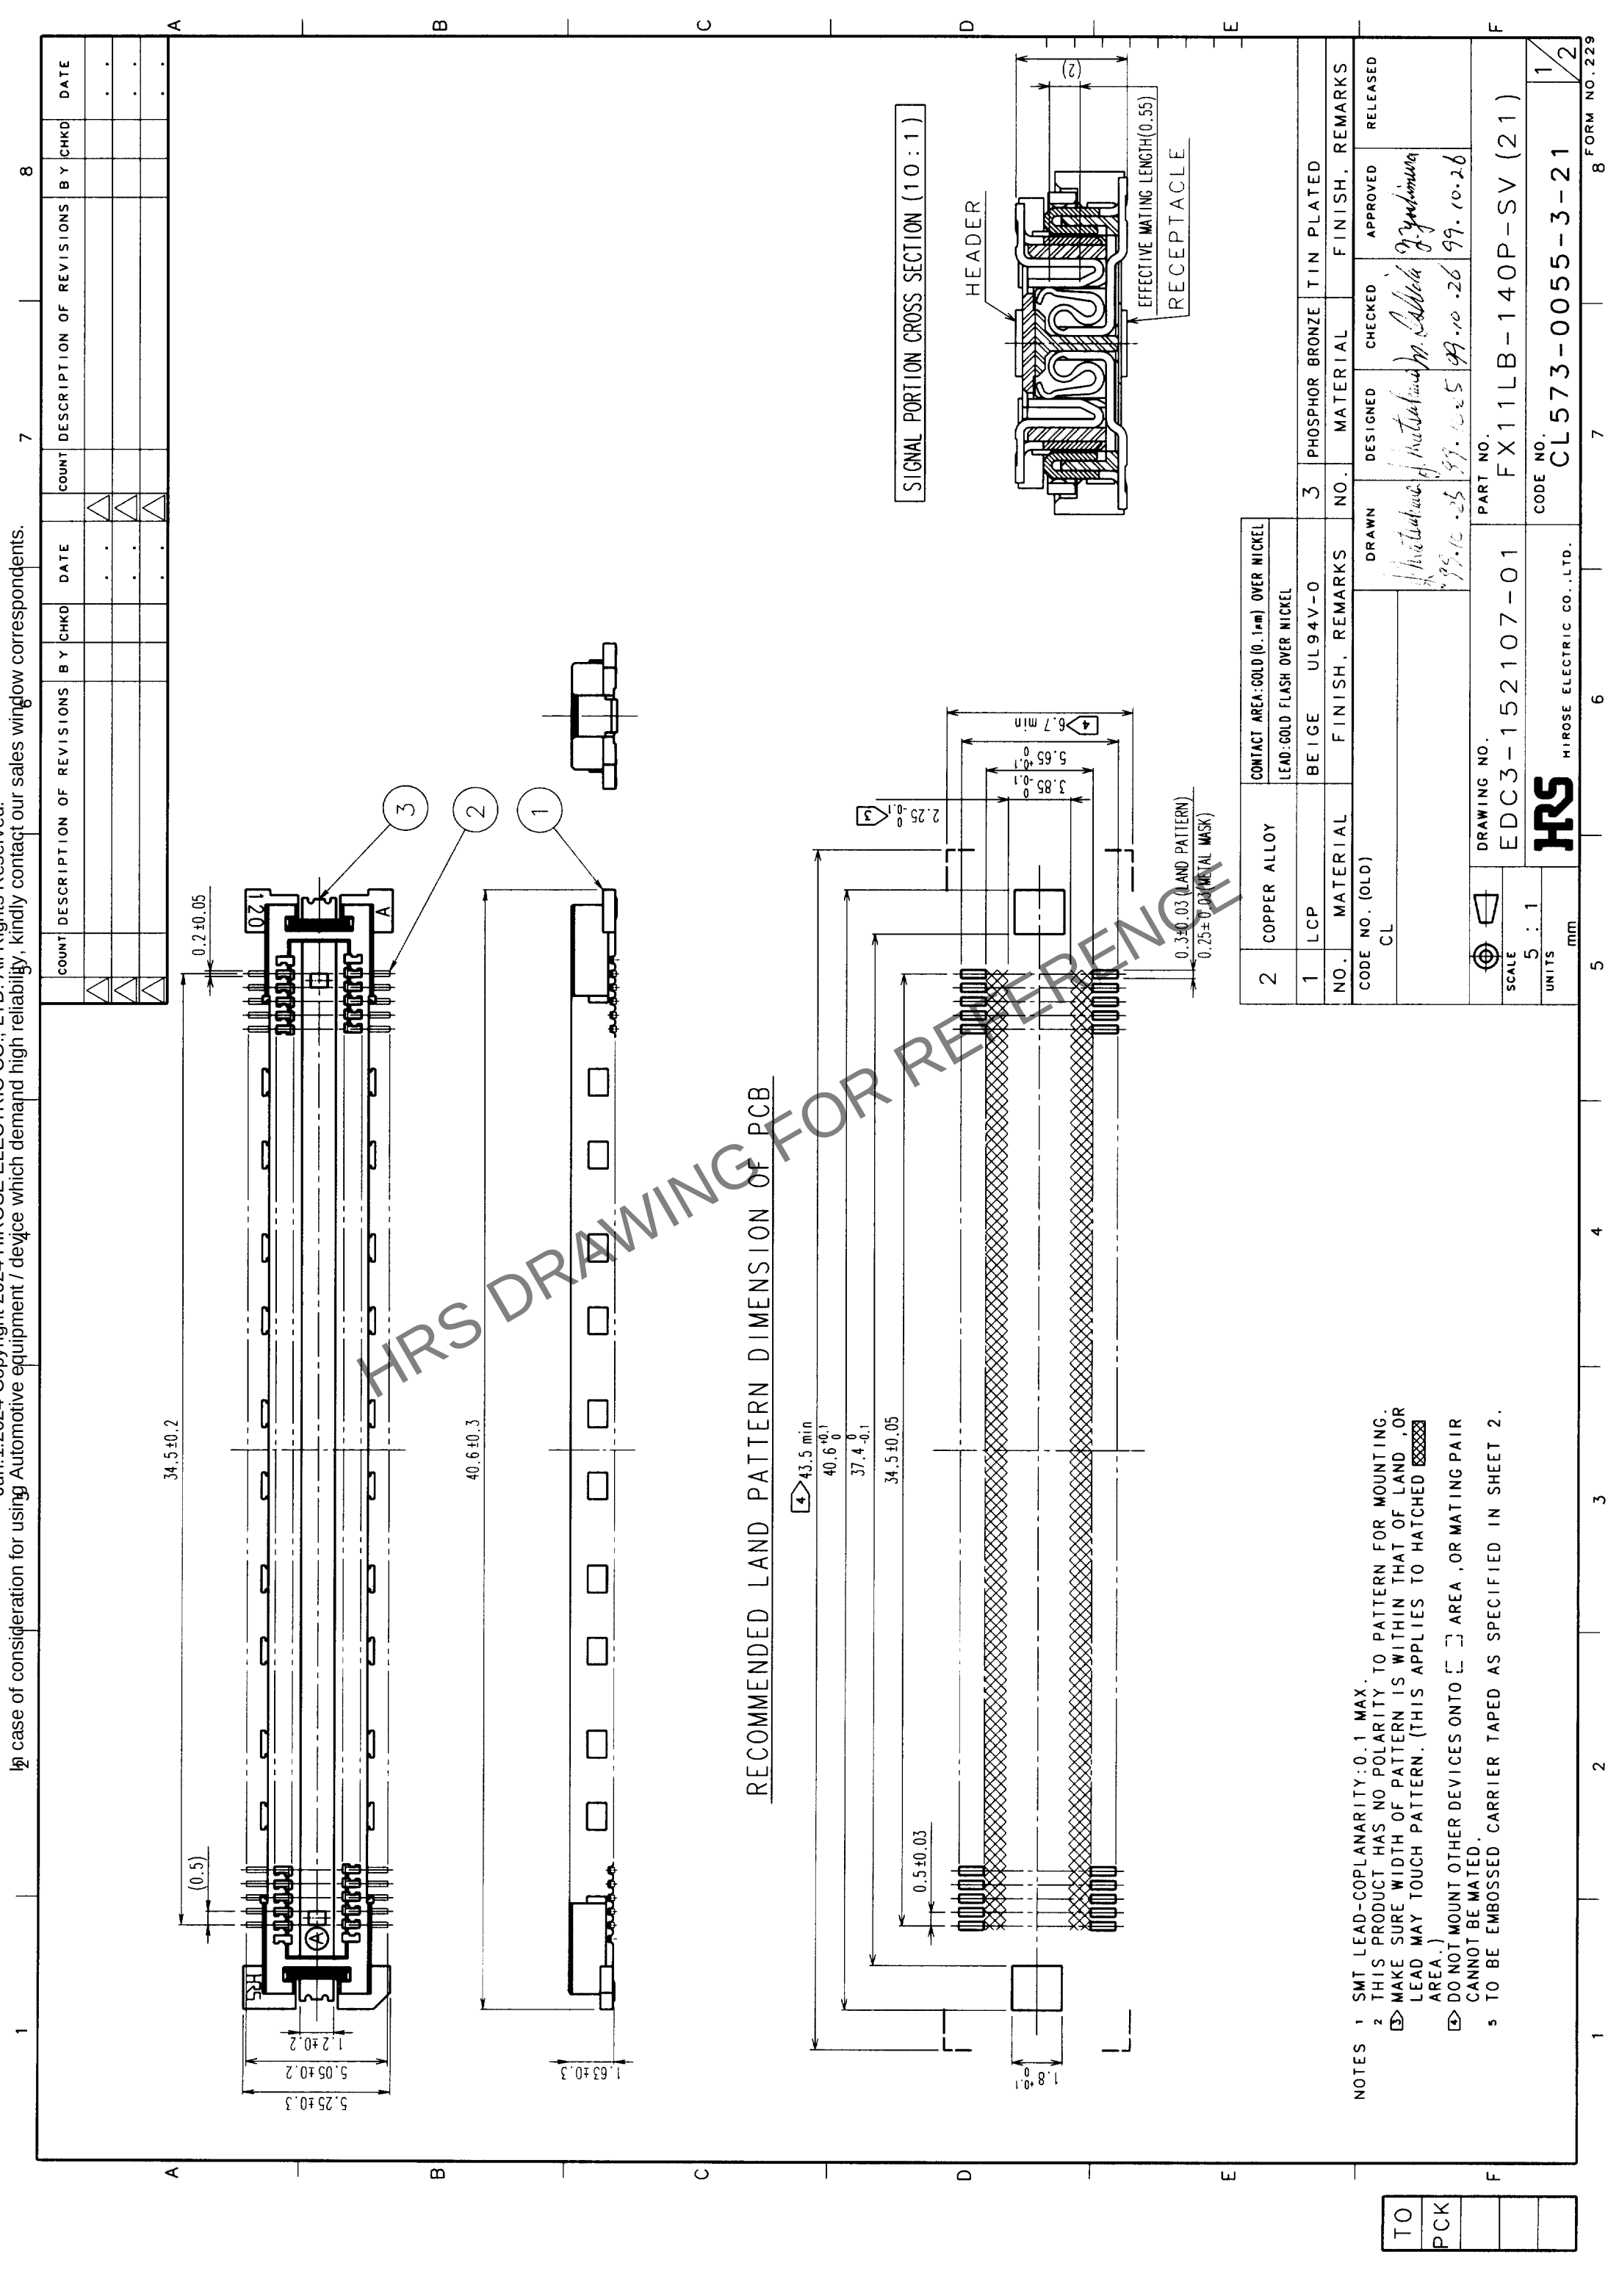

1 2 3 4 5 6 7 8

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales winglow correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

A B C D E F

RECOMMENDED LAND PATTERN DIMENSION OF PCB

SIGNAL PORTION CROSS SECTION (10:1)

HEADER

EFFECTIVE MATING LENGTH(0.55)

RECEPTACLE

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	BEIGE UL94V-0
3	PHOSPHOR BRONZE	TIN PLATED
FINISH	REMARKS	
DESIGNED	CHECKED	APPROVED
RELEASED		
DRAWING NO.	EDC3-152107-01	PART NO.
SCALE	5:1	
UNITS	mm	
CODE NO.	CL573-0055-3-21	

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

TO
PCK

