




Connectors > D-Shaped Connectors > D-Sub Connectors > Crimp D-Sub Connectors

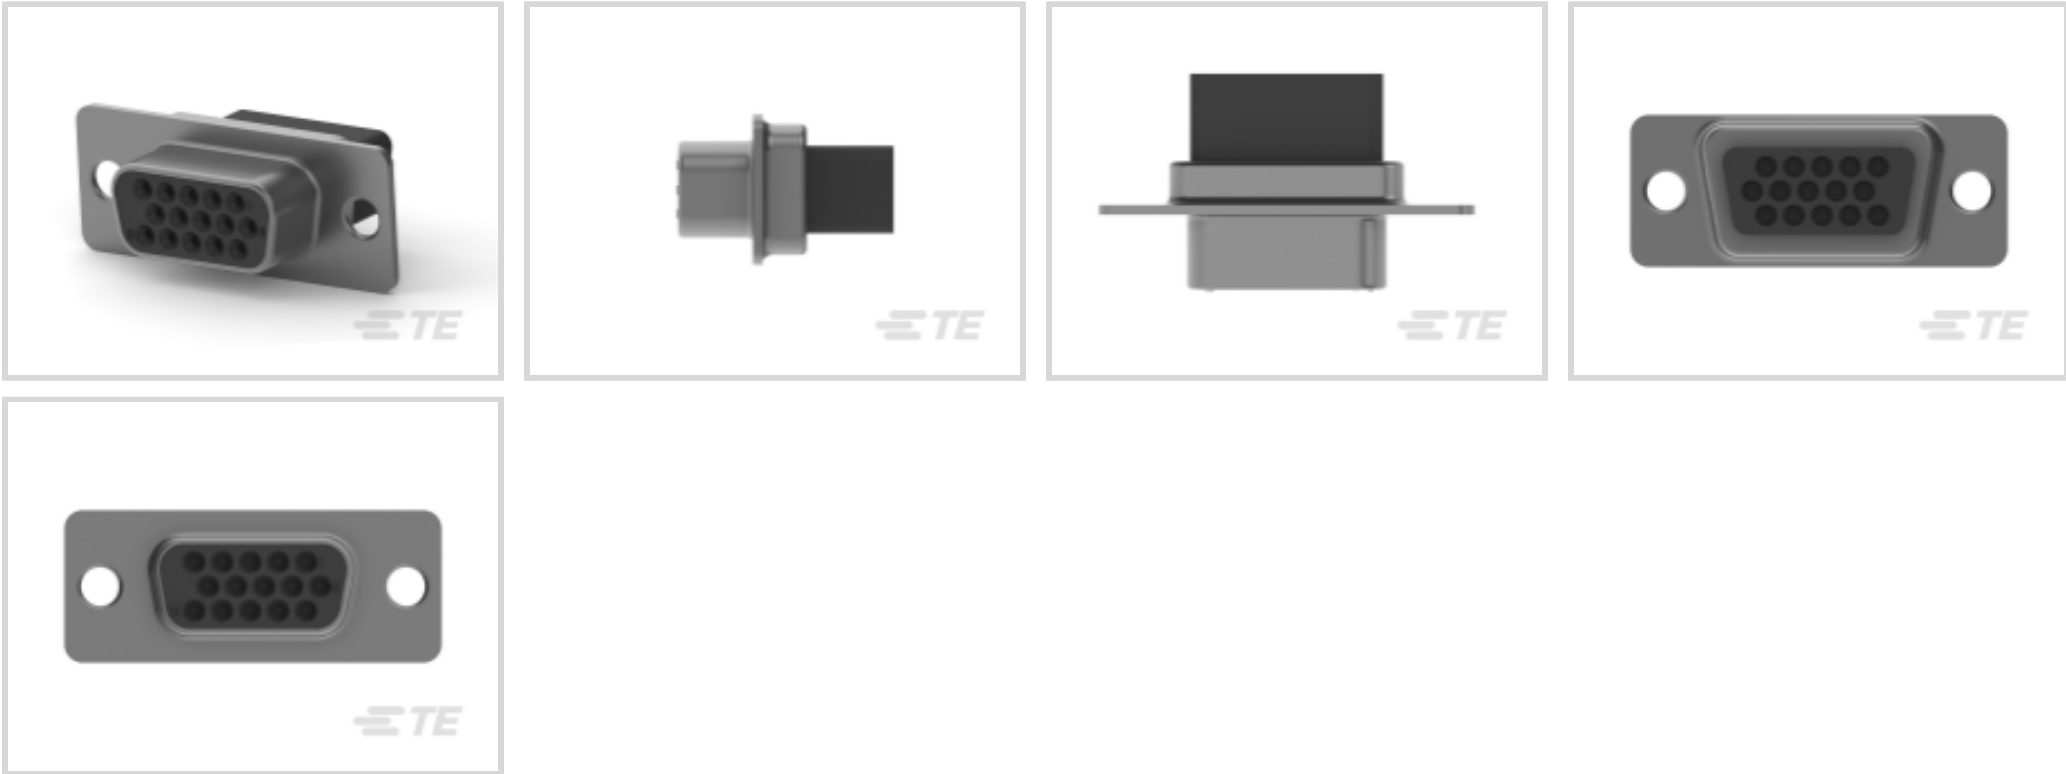

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Cable**

Number of Positions: **15**

Contact Size: **Size 22**

Connector Shell Size: **1**

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Cable-to-Cable
Connector Shell Size	1

Configuration Features

Number of Positions	15
---------------------	----

Contact Features

Contact Options	Order Separately
Contact Size	Size 22

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Retention	Without
------------------	---------

Housing Features

--	--



Centerline (Pitch)	2.28 mm[.089 in]
--------------------	------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # CAT-038-DCPPS221
D-Sub Crimp: Plug, Signal, 50 Posn, Pin Size 22, Shell Size 1



TE Part # 2198617-9
Ni Plated Plastic Backshell, 9 Way, Str

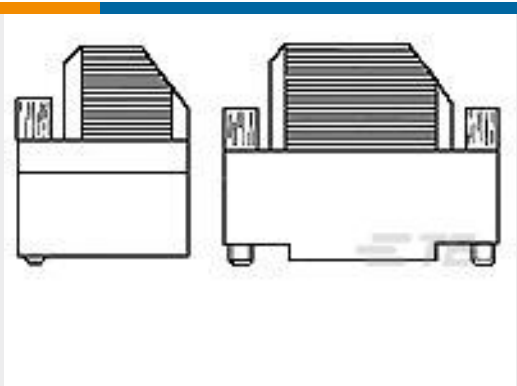

TE Part # 1393738-2
V42254A6000G115=SUB D GEHAEUSE

Customers Also Bought



TE Part #163085-8
.062 DIA PIN ASS 3+

TE Part #284716-4
6 P. REC CONN X UEGO CONN

TE Part #6-1393375-7
26pos MQS .63 header THR 90deg
Left Blak

TE Part #1534180-2
MCP SUB ASSY 32 POS HSG REC
Left Blak

TE Part #1740209-6
2X3POS AMP MODU IV HOUSING

TE Part #4-1579014-2
HT11K HAND TOOL NANOMQS TAB
0,13-0,35

TE Part #1393738-2
V42254A6000G115=SUB D GEHAEUSE

TE Part #193842-1
SKT ASSY., 2MM, 12-14 AWG

TE Part #282087-2
AMP SUPERSEAL 1.5 SERIES 3P PL

TE Part #5-100103-0
50P.A/L.STRAIN REL.

Documents

Product Drawings
15P.HDP22 REC.ASSY.

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_216164-1_D.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_216164-1_D.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_216164-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

216164-1

Receptacle, Cable-to-Cable, 15 Position, Size 22 Contact Size, 1 Connector Shell Size, 2.28 mm [.089 in] Centerline, Crimp D-Sub Connectors



Ocena wizualna zlaczy HD20 WTW

Workmanship Specification