




Connectors > PCB Connectors > PCB Headers & Receptacles > AMPSEAL PCB Right-Angle Headers

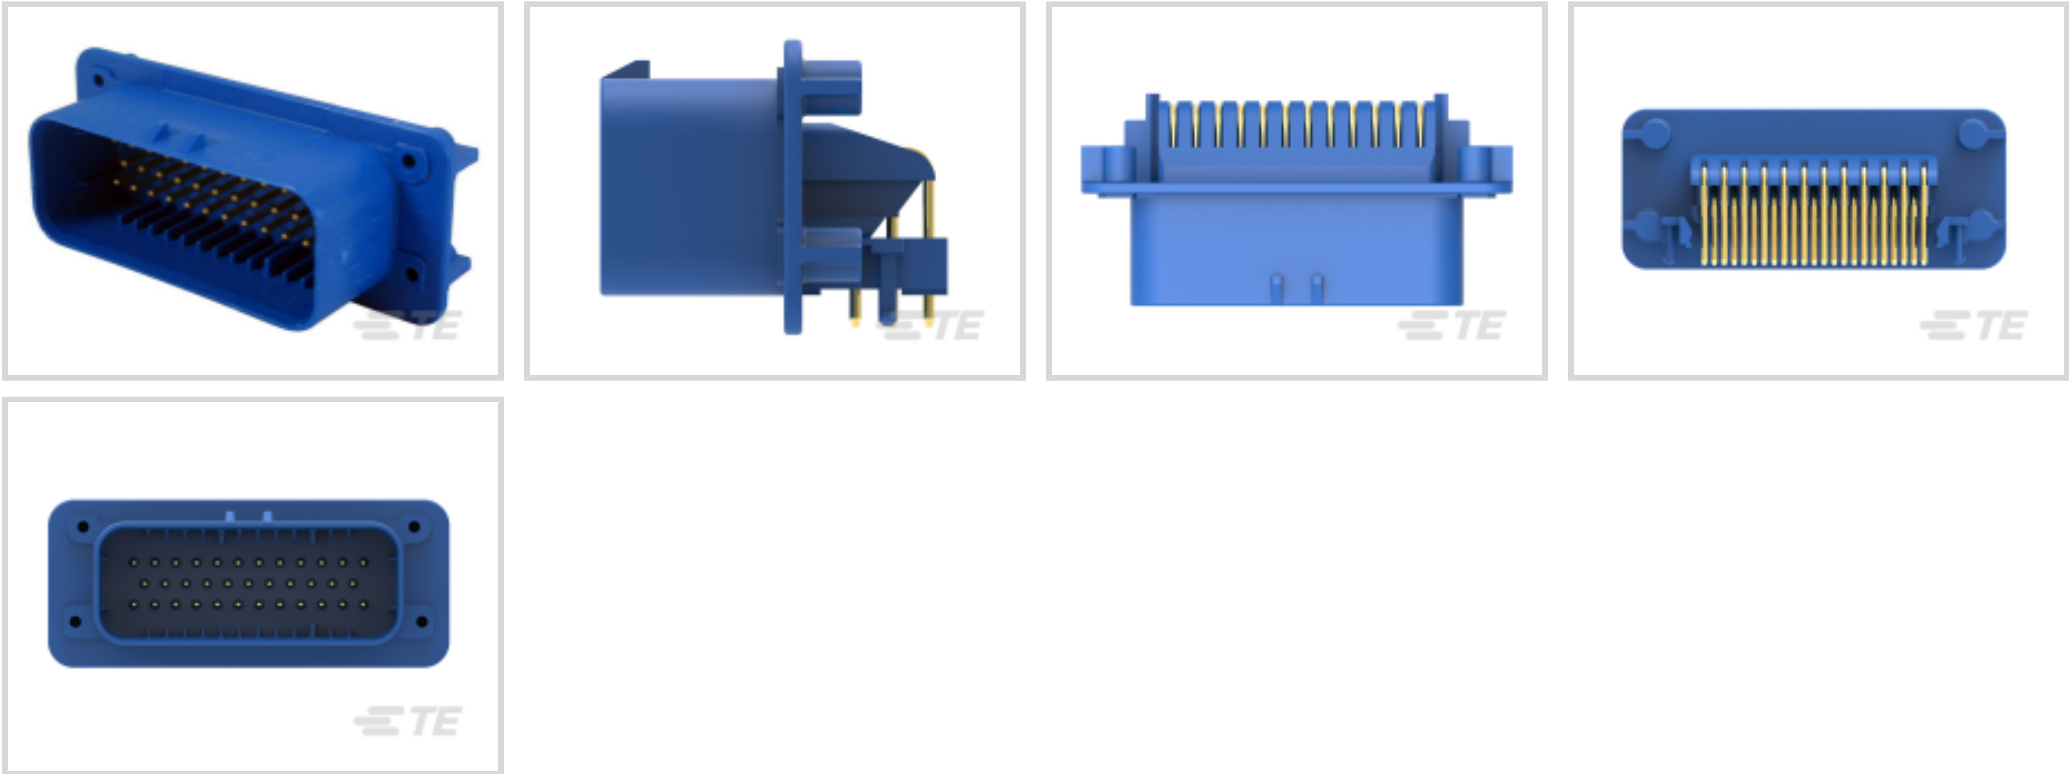

Connector System: **Wire-to-Board**  
Number of Positions: **35**  
Centerline (Pitch): **4 mm [ .157 in ]**  
Sealable: **Yes**  
PCB Mount Orientation: **Right Angle**

[All AMPSEAL PCB Right-Angle Headers \(63\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type       | PCB Mount Header      |
| Header Type                       | Fully Shrouded        |
| Connector System                  | Wire-to-Board         |
| Sealable                          | Yes                   |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                       |             |
|-----------------------|-------------|
| Number of Positions   | 35          |
| PCB Mount Orientation | Right Angle |
| Number of Rows        | 3           |

Body Features

|                         |      |
|-------------------------|------|
| Primary Product Color   | Blue |
| Connector & Keying Code | 5    |



Contact Features

|                                      |      |
|--------------------------------------|------|
| Contact Type                         | Pin  |
| Contact Mating Area Plating Material | Gold |
| Contact Current Rating (Max)         | 17 A |

Termination Features

|                           |                       |
|---------------------------|-----------------------|
| Termination Method to PCB | Through Hole - Solder |
|---------------------------|-----------------------|

Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Mating Alignment        | With        |
| PCB Mount Alignment     | With        |
| PCB Mount Retention     | With        |
| Connector Mounting Type | Board Mount |

Housing Features

|                    |               |
|--------------------|---------------|
| Centerline (Pitch) | 4 mm[.157 in] |
|--------------------|---------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                  |      |
|------------------|------|
| Packaging Method | Tray |
|------------------|------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |



Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-AM78-CH8172  
AMPSEAL Receptacle Housings



TE Part # 2374209-4  
FACIAL SEAL,AMPSEAL,35 POSITION, HEADER


Also in the Series | AMPSEAL



Automotive Connector Locks & Position Assurance(1)



Automotive Housings(31)

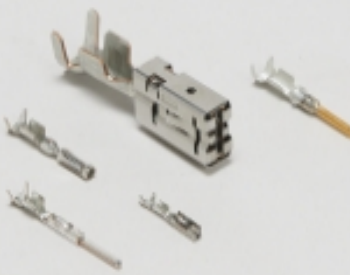


Automotive Terminals(8)



Connector Backshells(4)



Connector Seals & Cavity Plugs(2)

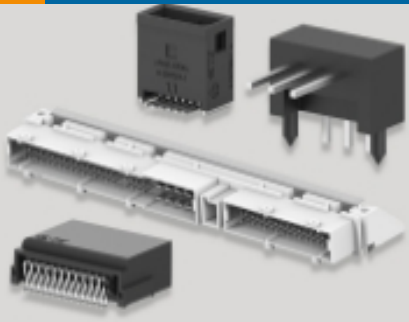


PCB Headers & Receptacles(120)

Customers Also Bought







TE Part #770669-1  
AMPSEAL PCB Right-Angle Headers

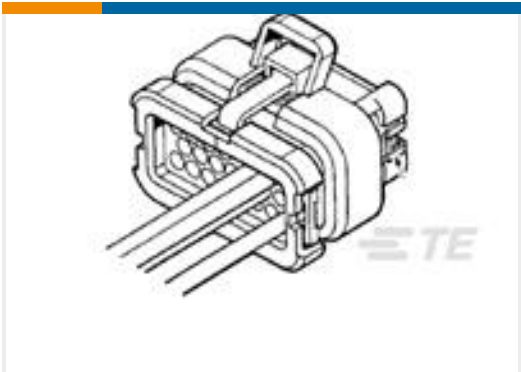

TE Part #776273-5  
14POS,AMPSEAL,SOC HSG ASSY,SLD,COD 5

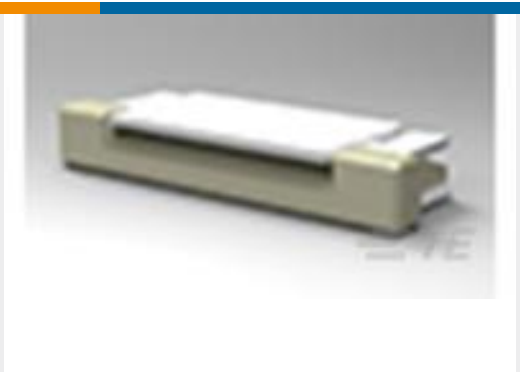

TE Part #1734839-8  
FPC CONN. 0.5MM PITCH T/C,8P

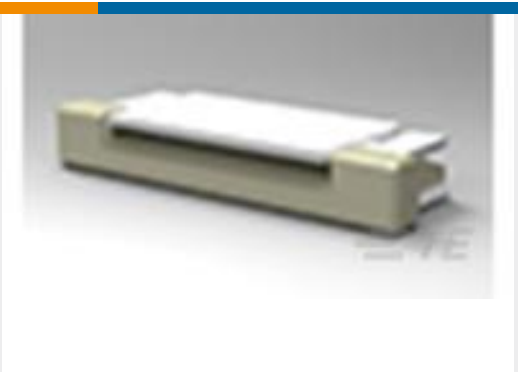

TE Part #5-1734839-0  
FPC CONN. 0.5MM PITCH T/C,50P



TE Part #HDP24-24-33PN  
REC, 33P, BLK, N, 20, P



TE Part #DT15-12PB  
HDR, 12P, BLK, ST, NI/CU, B



TE Part #YDTS26W15-19SNV001  
PLUG ASSY



TE Part #5-1814400-2  
SMA R/A PCB Skt GZD

Documents

Product Drawings

35POS,AMPSEAL,PIN HSG ASSY,SLD,COD 5

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-776180-5\_M.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-776180-5\_M.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-776180-5\_M.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Application Specification

English

1-776180-5

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in]  
Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL



[Agency Approvals](#)

[UL Report](#)

English