


SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, orange RAL 2003, shielded (Advanced Shielding Technology), free cable end, on Socket angled M12, coding: S, cable length: 5 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Shield power reliably – 360° shielding to reduce electromagnetic loads
- Our standard: robust halogen-free PUR cable

Commercial data

Item number	1424102
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF05
Product key	BF1CCP
Catalog page	Page 289 (C-2-2019)
GTIN	4046356693073
Weight per piece (including packing)	740.2 g
Weight per piece (excluding packing)	743 g
Customs tariff number	85444290
Country of origin	PL

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Technical data

Product properties

Product type	Power cable
Application	Power supply
Number of positions	4
No. of cable outlets	1
Shielded	yes
Coding	S

Data management status

Article revision	06
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	690 V AC
Nominal current I_N	12 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Socket angled M12
Coding type	S (Power)

Cable/line

Cable length	5 m
--------------	-----

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

PUR halogen-free orange shielded [PUR]

Dimensional drawing	
UL AWM Style	20234 / 10492 (80°C/1000 V)
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free orange shielded [PUR]
Conductor cross section	4x 1.5 mm²
Wire diameter incl. insulation	≤ 2.5 mm
External cable diameter	9.70 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	orange RAL 2003
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Thickness, insulation	0.40 mm
Thickness, outer sheath	1.20 mm
Overall twist	4 wires optimally twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	1000 V AC
Test voltage	4260 V AC (5 min.)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	7.5 x D
Smallest bending radius, fixed installation	49 mm
Smallest bending radius, movable installation	73 mm
Dynamic load capacity (bending)	Max. bending cycles: 4000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s²
Dynamic load capacity (torsion)	Torsion: ±25 °/m
Halogen-free	according to VDE 0282-13 Appendix C
Flame resistance	in accordance with EN 60332-1-2 in acc. to UL 1581 VW1 According to CSA C 22.2 No. 210-05 FT1
Resistance to oil	in accordance with DIN EN 60811-2-1 According to DIN EN 50363-10-2
Other resistance	UV resistant Low adhesion

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)
	-30 °C ... 90 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP65
	IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable




1424102

<https://www.phoenixcontact.com/us/products/1424102>

Drawings

Schematic diagram

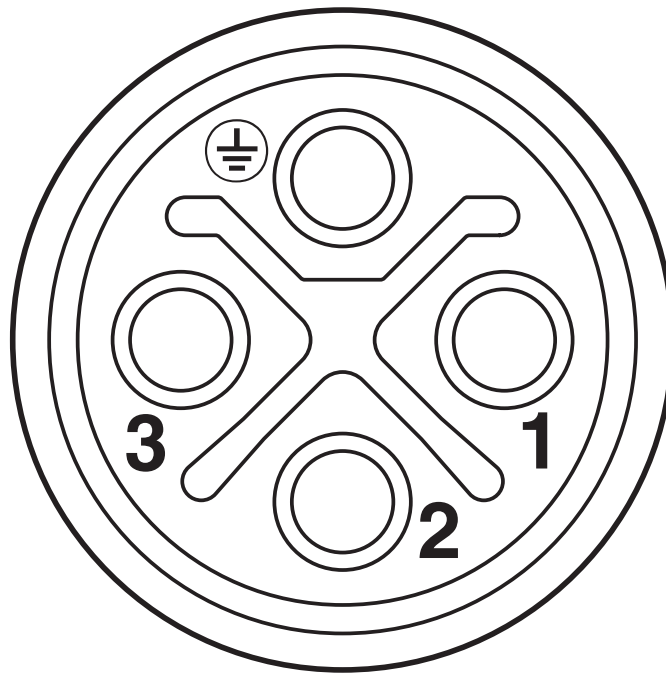

Pin assignment of M12 socket, 4-pos., S-coded, socket side view


SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable

1424102

<https://www.phoenixcontact.com/us/products/1424102>




Dimensional drawing

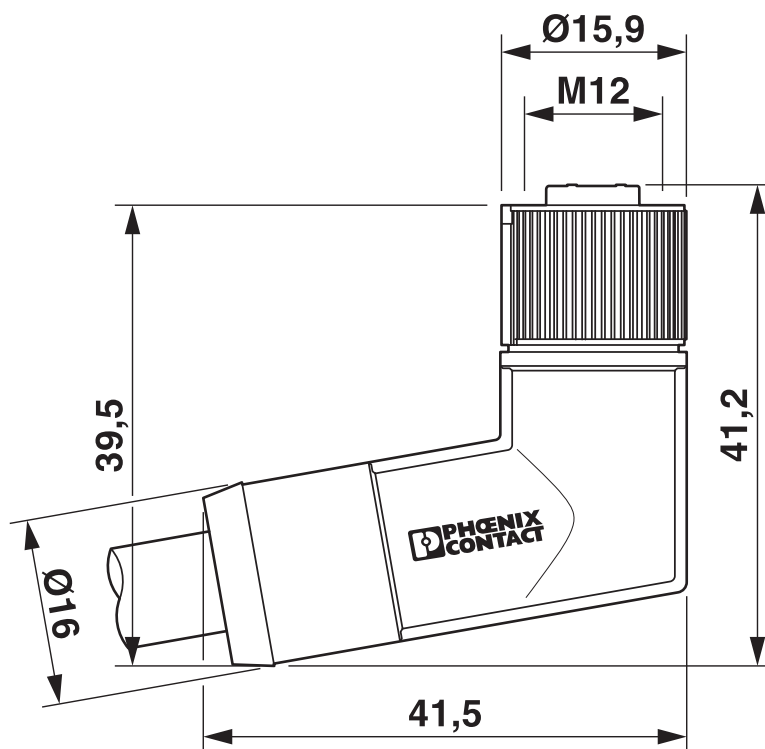

M12 x 1 socket, angled

Circuit diagram

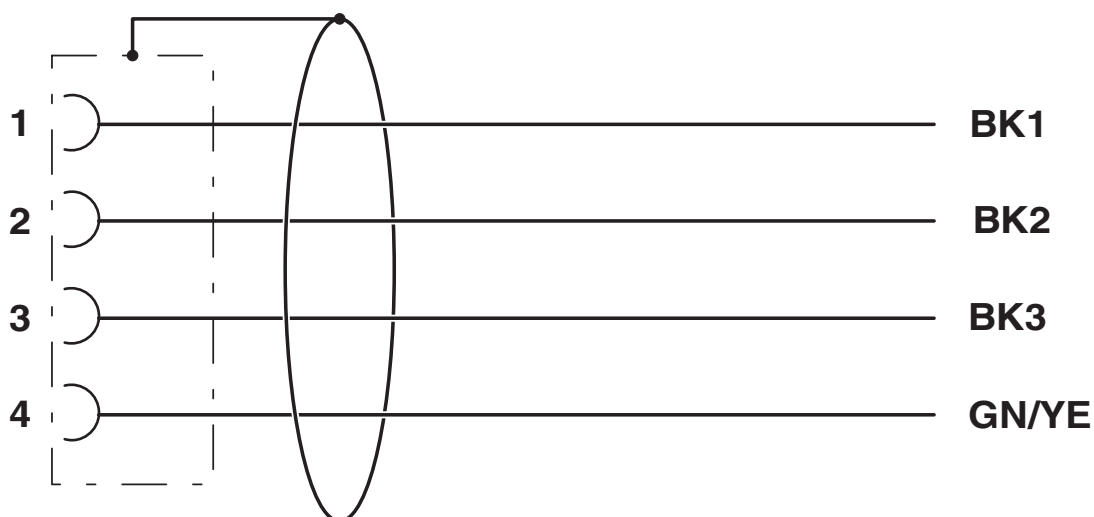


SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

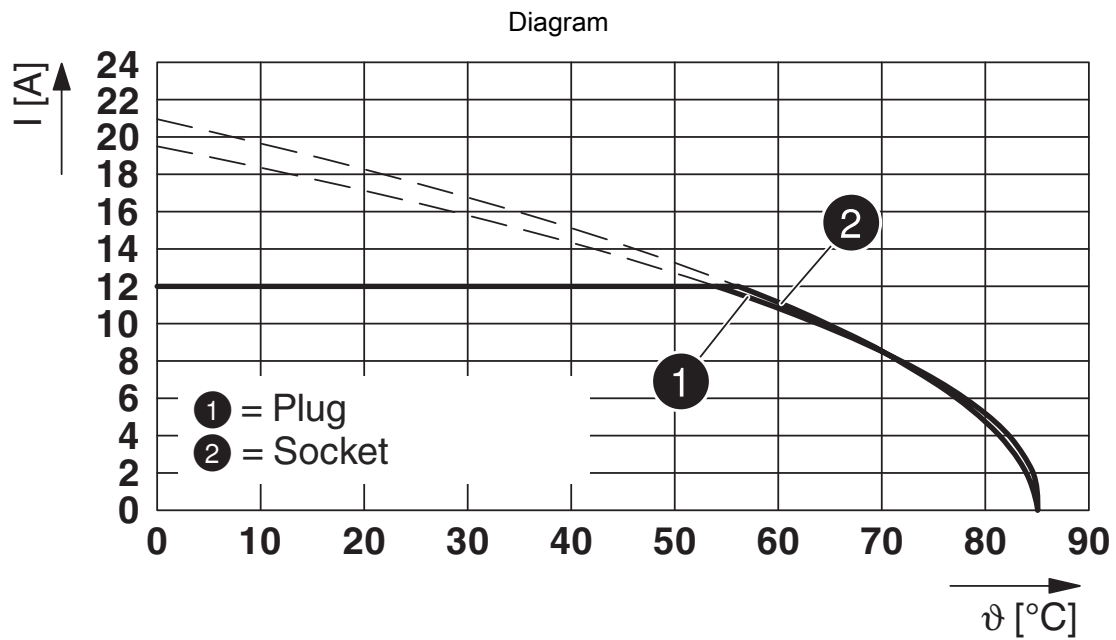

Base curve

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424102>

	UL Listed Approval ID: FILE E 468743			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	-	- 16

	cUL Listed Approval ID: FILE E 468743			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	- 16	-

	EAC-RoHS Approval ID: RU D-DE.HB35.B.00387			

cULus Listed				
---------------------	--	--	--	--

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060327

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P- 5,0-PUR/M12FRS PE SH - Power cable



1424102

<https://www.phoenixcontact.com/us/products/1424102>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com