



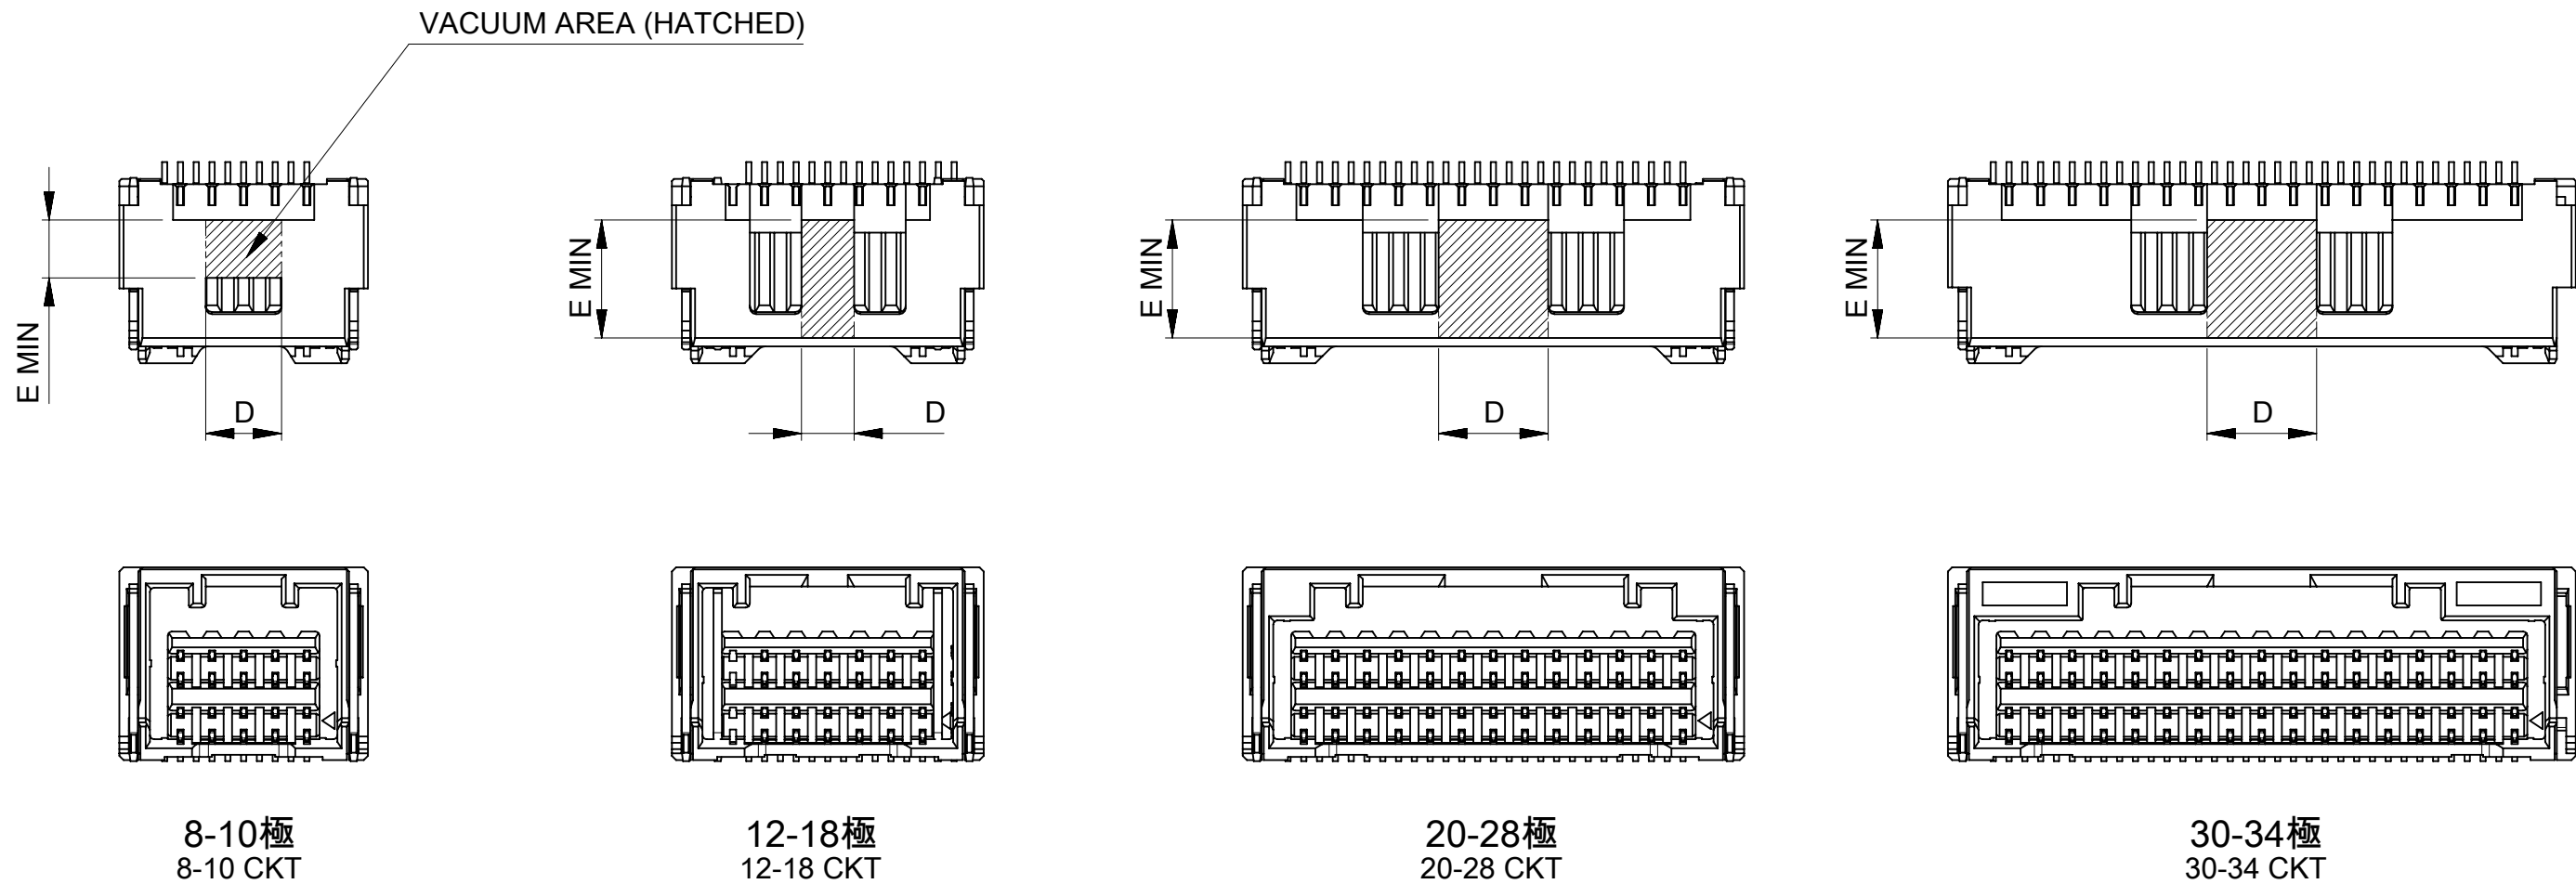


極数別ハウジング形状および吸着エリア
HOUSING SHAPE AND VACUUM AREA AT EACH CKTS

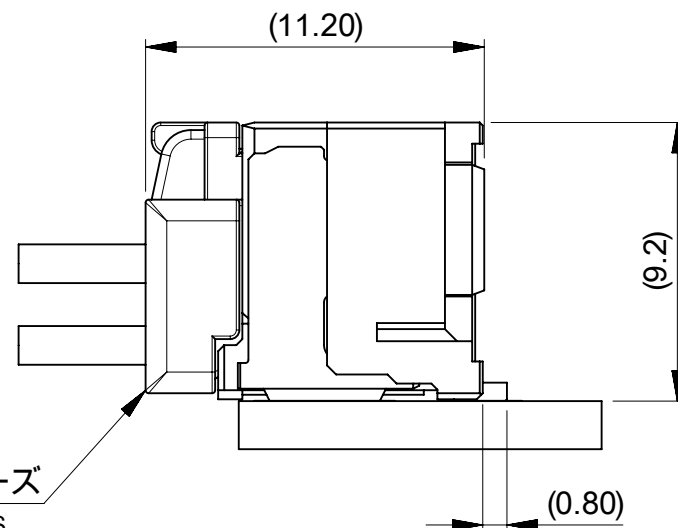

嵌合図
MATED CONNECTORS


5.6	5.2	26
		24
	4.2	22
	3.2	20
2.75	2.5	16
		14
	2.3	12
	3.6	10
		8
E	D	CKT NO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex					
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				CLIK-MATE 1.5 DUAL ROW SMT R/A TYPE GOLD PLATING								
ANGULAR TOL ± 3.0°												
4 PLACES		± 0.2		EC NO: 742719			PRODUCT CUSTOMER DRAWING					
3 PLACES		± 0.2		DRWN: MIKEDA01 2023/06/23								
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2023/06/23								
1 PLACE		± 0.2		APPR: AIDA 2023/06/23			DOCUMENT NUMBER 2132280000-SD					
0 PLACES		± 0.2		INITIAL REVISION:								
DRWN: MIKEDA01 2019/10/01				DOC TYPE			DOC PART		REVISION			
APPR: KOMURAKAMI 2019/11/20				PSD			000		G			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
						A3-SIZE	213228	SEE CHART		GENERAL		3 OF 6

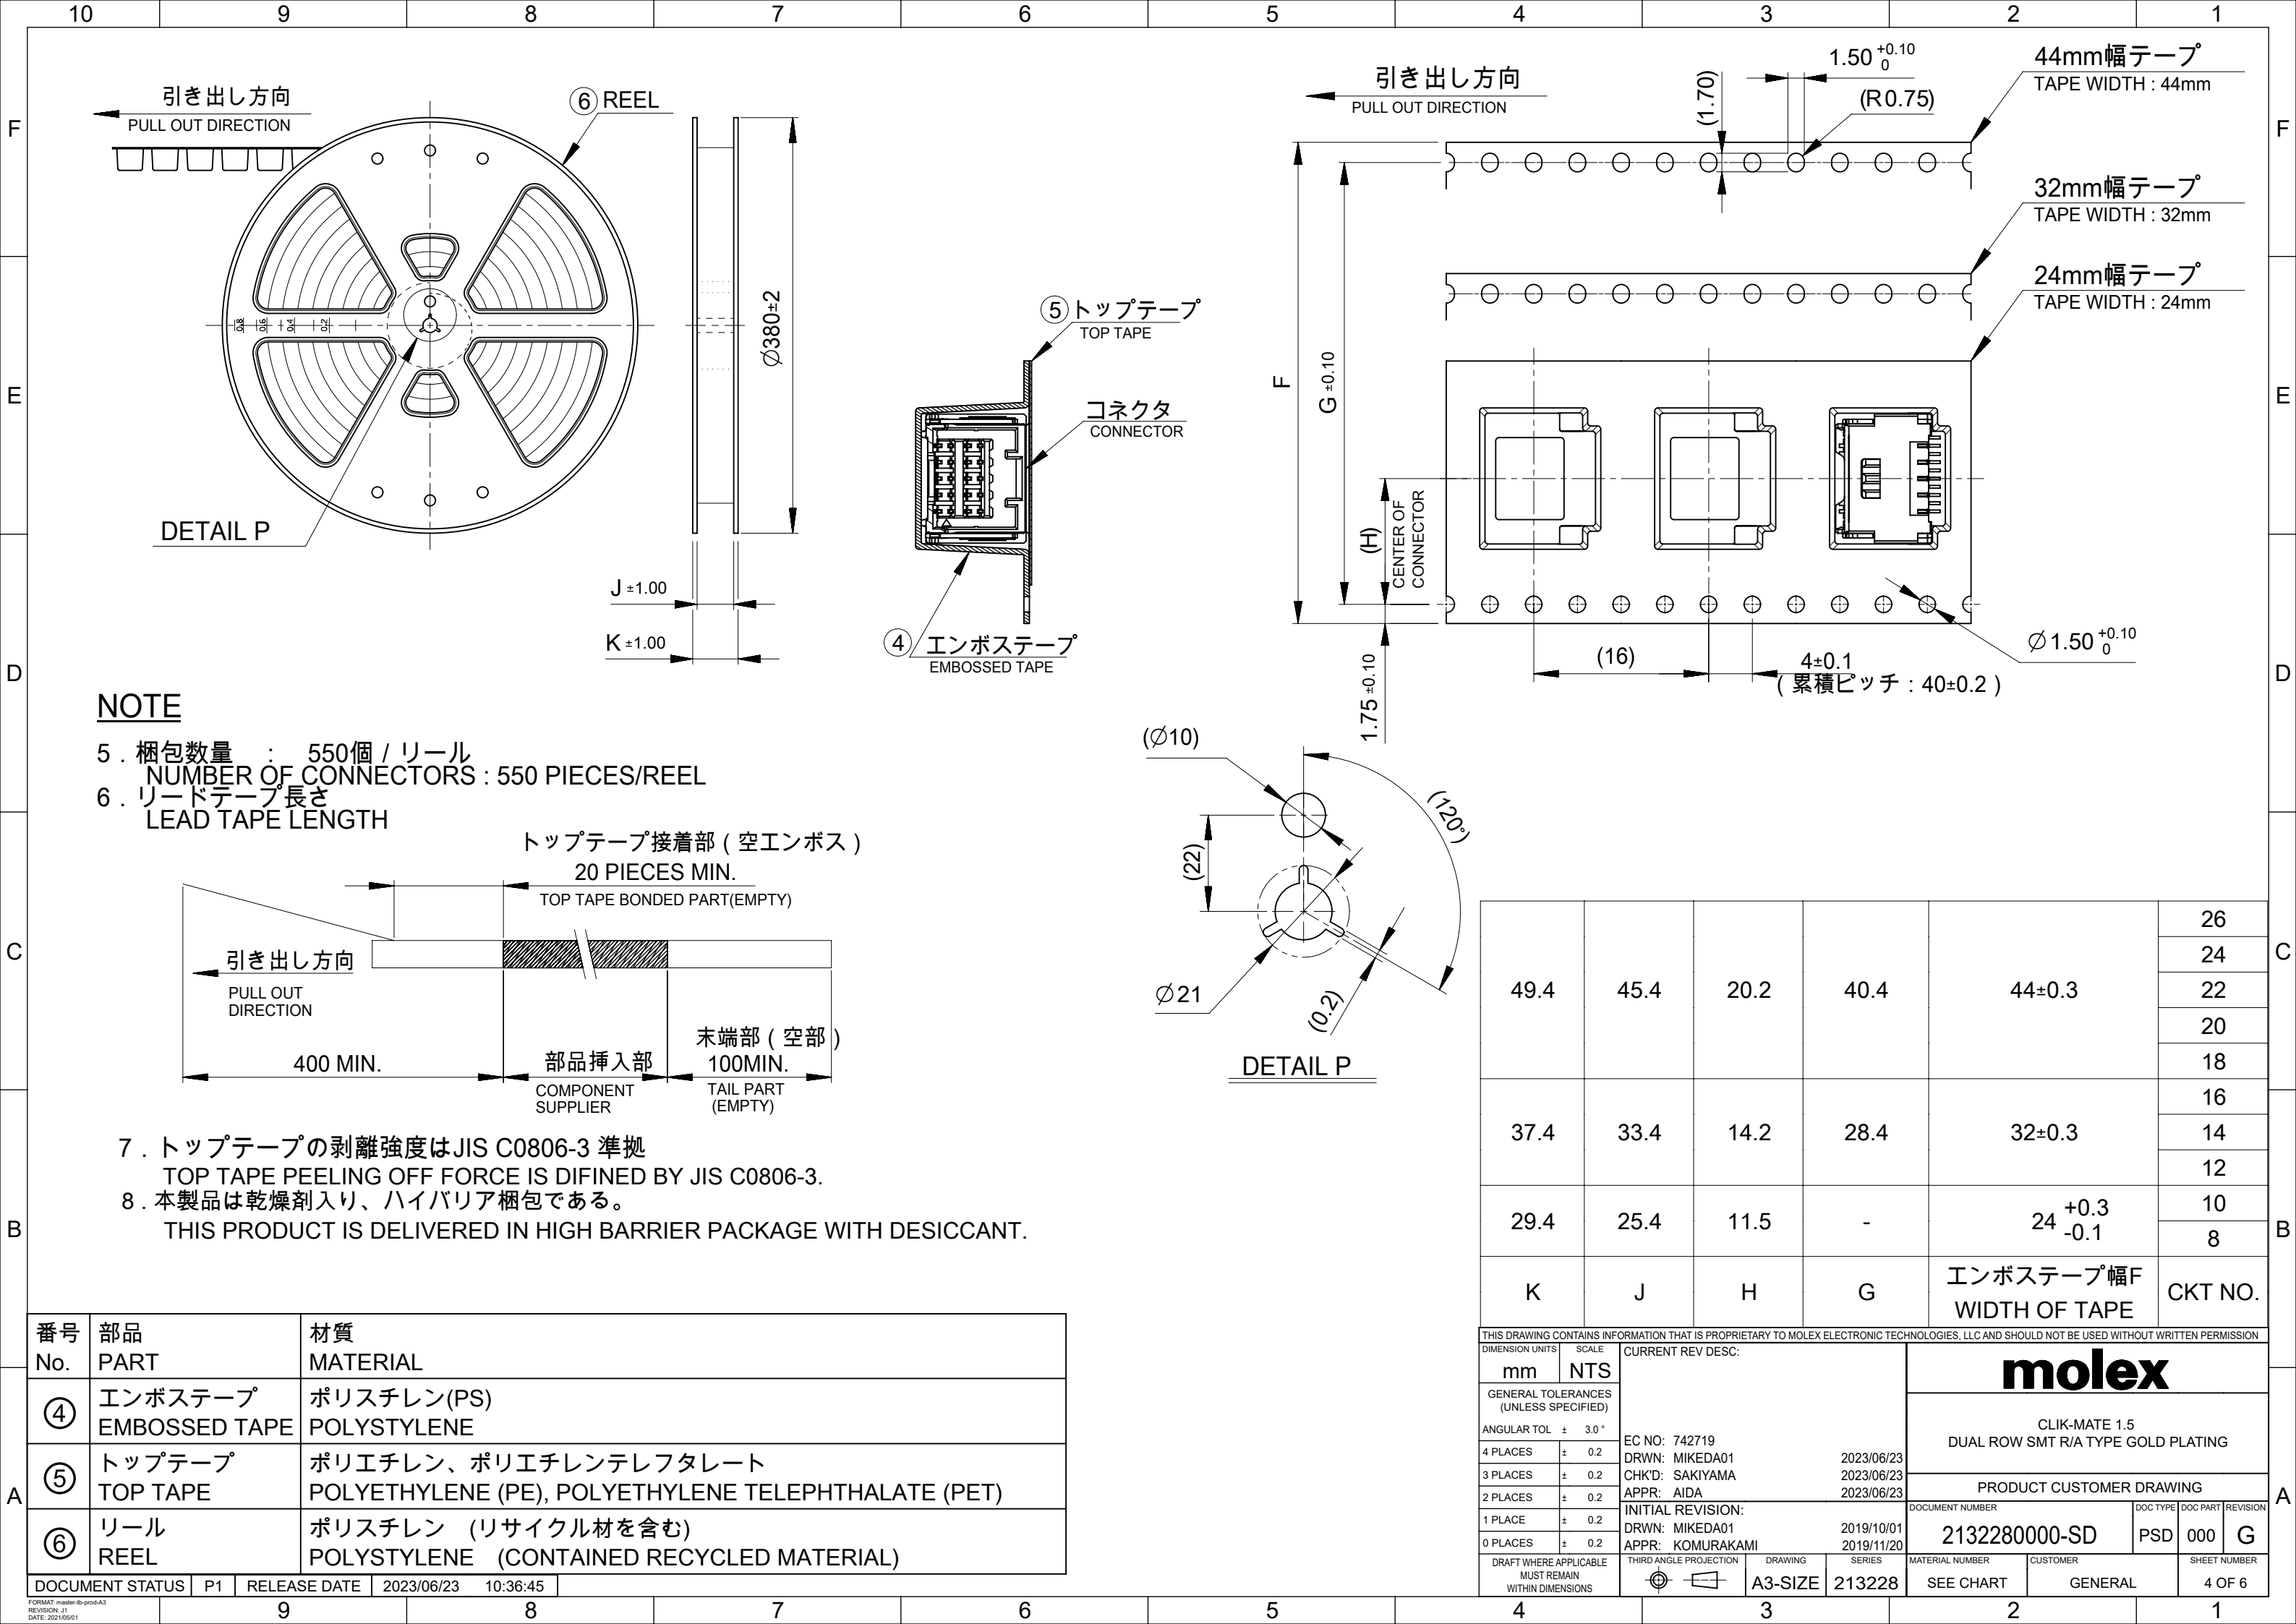

NOTE

5. 梱包数量 : 550個 / リール
NUMBER OF CONNECTORS : 550 PIECES/REEL
6. リードテープ長さ
LEAD TAPE LENGTH

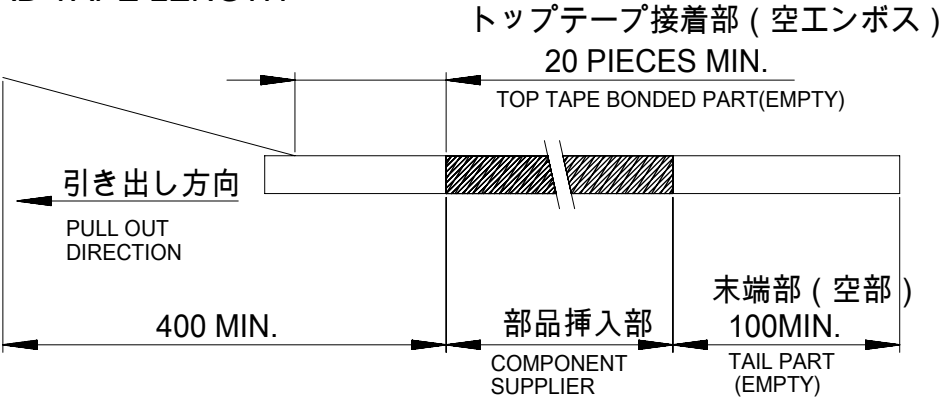

7. トップテープの剥離強度はJIS C0806-3 準拠
TOP TAPE PEELING OFF FORCE IS DIFINED BY JIS C0806-3.
8. 本製品は乾燥剤入り、ハイバリア梱包である。
THIS PRODUCT IS DELIVERED IN HIGH BARRIER PACKAGE WITH DESICCANT.

番号 No.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYLENE
⑤	トップテープ TOP TAPE	ポリエチレン、ポリエチレンテレフタレート POLYETHYLENE (PE), POLYETHYLENE TELEPHTHALATE (PET)
⑥	リール REEL	ポリスチレン (リサイクル材を含む) POLYSTYLENE (CONTAINED RECYCLED MATERIAL)

DOCUMENT STATUS	P1	RELEASE DATE	2023/06/23	10:36:45
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
DIMENSION UNITS	SCALE						
mm	NTS						
GENERAL TOLERANCES (UNLESS SPECIFIED)							
ANGULAR TOL	± 3.0 °						
4 PLACES	± 0.2	EC NO: 742719					
3 PLACES	± 0.2	DRWN: MIKEDA01		2023/06/23			
2 PLACES	± 0.2	CHK'D: SAKIYAMA		2023/06/23			
1 PLACE	± 0.2	APPR: AIDA		2023/06/23			
0 PLACES	± 0.2	INITIAL REVISION:					
		DRWN: MIKEDA01		2019/10/01			
		APPR: KOMURAKAMI		2019/11/20			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A3-SIZE	213228	SEE CHART	GENERAL	4 OF 6


△3

適用製品及び各種仕様書

APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS

梱包仕様書 PACKAGING SPECIFICATION	PART NUMBER	DOCUMENT NUMBER
	213228 ****	2132289200-SPK

適用嵌合相手 MATE WITH	HOUSING	TERMINAL (GOLD PLATING)		
		PLATING THK	#24-28	#28-30
製品番号 PRODUCT NUMBER	503149 ****	0.1 micro-meters	213028 1*00	213029 1*00
		0.38 micro-meters	213028 3*00	213029 3*00
		0.76 micro-meters	213028 7*00	213029 7*00
製品仕様書 PRODUCT SPECIFICATION	5031490002-PS/PS/000			
アプリケーション仕様書 APPLICATION SPECIFICATION	AS-503149-001			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex			
mm		NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)										
ANGULAR TOL ± 3.0 °										CLIK-MATE 1.5 DUAL ROW SMT R/A TYPE GOLD PLATING
4 PLACES		± 0.2		EC NO: 742719			PRODUCT CUSTOMER DRAWING			
3 PLACES		± 0.2		DRWN: MIKEDA01 2023/06/23						
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2023/06/23						
1 PLACE		± 0.2		APPR: AIDA 2023/06/23			DOCUMENT NUMBER 2132280000-SD			
0 PLACES		± 0.2		INITIAL REVISION: DRWN: MIKEDA01 2019/10/01 APPR: KOMURAKAMI 2019/11/20						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE	SERIES 213228	MATERIAL NUMBER SEE CHART	CUSTOMER GENERAL	SHEET NUMBER 5 OF 6

