


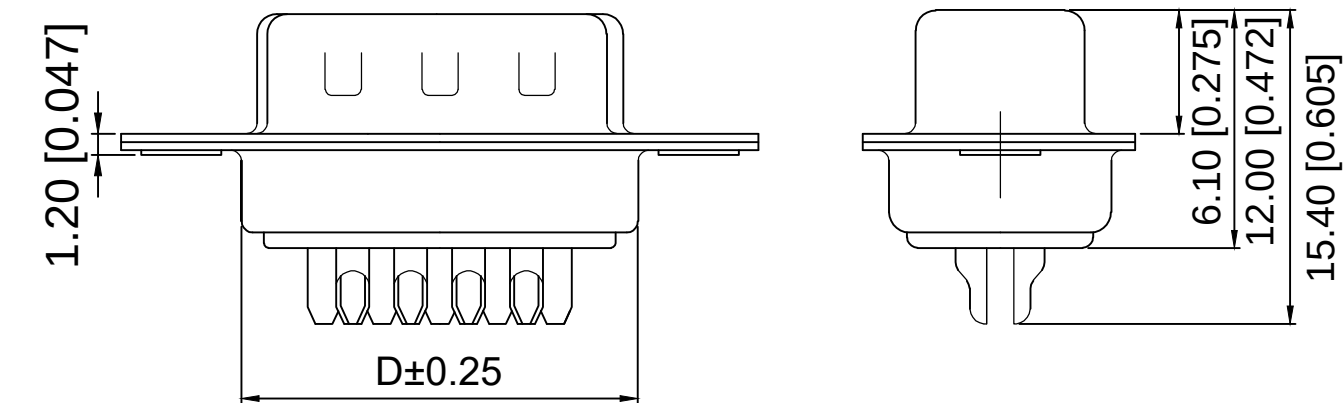

Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:5A AC/DC

额定电流: 5A AC/DC

3. Withstanding voltage: 1000V AC/minute

耐受电压: 1000V AC/分钟

4. Temperature range: -55°C-+105°C

温度范围: -55°C-+105°C

5. Insulation resistance: 500MΩ MIN

绝缘电阻:500MΩ MIN

6.Contact resistance:30mΩ Max

接触电阻: 30mΩ Max

Materialai:

材料：

7.Rubber core:PBT+G/F UL94V-0

胶芯: PBT+C/F UL94V-0

8.The iron shell:Steel ; Tin Plating


铁壳: 钢 ; 镀锡

9. Terminal: Brass

端子: 黄铜

X01	XX	W	X	X	X	X	L
①	②	③	④	⑤	⑥	⑦	⑧

- ① Series N0.
- ② Row No.Pin No.XXX-09;15;25;37
- ③ Welding Board Angle :W-Male
- ④ T: Traditional C: Car-pin
- ⑤ Planting Category: 1:Gold 1u ;2:Gold 2u ;3:Gold 3u ;4:Gold 5u; 5:Gold 15u; 6:Gold 30u ;7:Terminal half- Gold Bright Tin;8:Terminal half- Gold 2u Bright Tin ;9:Terminal half- Gold 3u Bright Tin;10:Terminal half- Gold 5u Bright Tin ;11:Terminal half- Gold 15u Bright Tin;12:Terminal half- Gold 30u Bright Tin ;13:Terminal half- Gold Matte Tin;14:Terminal half- Gold 2u Matte Tin ;15:Terminal half- Gold 3u Matte Tin ;16:Terminal half- Gold 5u Matte Tin ;17:Terminal half- Gold 15u Matte Tin;18:Terminal half- Gold 30u Matte Tin
- ⑥ TinColor:B-BLACK W-White BL-Blue
- ⑦ 1:TYPE-1; 5:TYPE-5
- ⑧ L: Stitching lengthening



NUMBER OF POSITIONS	DIMENSION			
	A±0.25	B±0.13	C±0.38	D±0.25
9	18.00	24.99	30.80	19.28
15	26.50	33.32	39.20	27.51
25	40.00	47.04	53.05	41.28
37	56.60	63.50	69.40	57.71

					ANGLAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
Δx					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLE

DSND		SCALE: N/A	MODEL TYPE: D-SUB		
DWN		VIEW: 	PART NO.: X01XXWXXXXXL		
CHKD		UNIT: mm/in	DWG NO.: X-X01XXWXXXXXL		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0