




**Part Number :** [5035661102](#)  
**Product Description :** 0.30mm Pitch Easy-On FPC Connector, Right-Angle, Bottom Contact, 0.95mm Height, 11 Circuits, Gold over Nickel Plating  
**Series Number :** 503566  
**Status :** Active  
**Product Category :** FFC / FPC Connectors

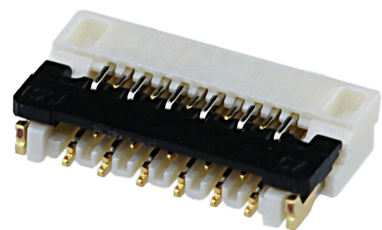

Documents & Resources


**Drawings**  
[5035661102\\_sd.pdf](#)

**3D Models and Design Files**  
[5035661102\\_stp.zip](#)

**Specifications**  
[5035660000-A00.pdf](#)  
[5035669200-200.pdf](#)  
[5035660000-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements  
- Eu RoHS  
- REACH SVHC  
- Low-Halogen

Multiple Part Industry Compliance Documents  
- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	FFC / FPC Connectors
Series	503566
Description	0.30mm Pitch Easy-On FPC Connector, Right-Angle, Bottom Contact, 0.95mm Height, 11 Circuits, Gold over Nickel Plating
Product Name	Easy-On
UPC	191128129749

#### Electrical

Current - Maximum per Contact	0.3A
Voltage - Maximum	50V

#### Physical

Actuator Type	Front Flip
Circuits (Loaded)	11
Circuits (maximum)	11
Color - Resin	Natural
Contact Position	Bottom
Durability (mating cycles max)	10
Mated Height	0.95mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Liquid Crystal Polymer
Net Weight	20.154/mg
Orientation	Right Angle

Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	None
Pitch - Mating Interface	0.30mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Wire/Cable Type	FPC only

### Solder Process Data

Lead-Free Process Capability	REFLOW
Max-Cycle	2
Max-Temp	250

---

### Mates With / Use With

#### Mates with Part(s)

Description	Part Number
0.30mm Pitch Premo-Flex FPC Jumpers with Latching Ears	<u>15032</u>