

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	DIMENSIONS in. [mm]		
			L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]
ED18-188	#22-18 [0,5-1,0]	.187 X .020 [4,8 X 0,5]	.58 [14,7]	.23 [5,8]	.10 [2,5]
ED14-188*	#16-14 [1,5-2,5]	.187 X .020 [4,8 X 0,5]	.58 [14,7]	.23 [5,8]	.10 [2,5]

*UL RECOGNIZED ONLY

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:

- A. STRANDED COPPER WIRE ONLY
- B. 302°F (150°C) MAX TEMP RATING
- C. 2000V MAX VOLTAGE

2. MATERIAL:

- A. STAMPING: .016 (0.41) THK BRASS, TIN PLATED
- B. SLEEVE: BRASS, TIN PLATED



3. INSTALLATION TOOLS:

- A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-570, CT-1570, CT-2457CH
- B. UL RECOGNIZED: CT-100A, CT-200, CT-570, CT-1570, CT-2457CH
- C. PANDUIT APPROVED: CT-160, CT-260

4. WIRE STRIP LENGTH 9/32" ^{+1/32}₋₀ [7.1mm ^{+0.8}₋₀]

5. FIRST INSERTION FORCE: 12 LB (53N) MAX
FIRST WITHDRAWAL FORCE: 12 LB (53N) MAX
6 LB (27N) MIN

6. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
7. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

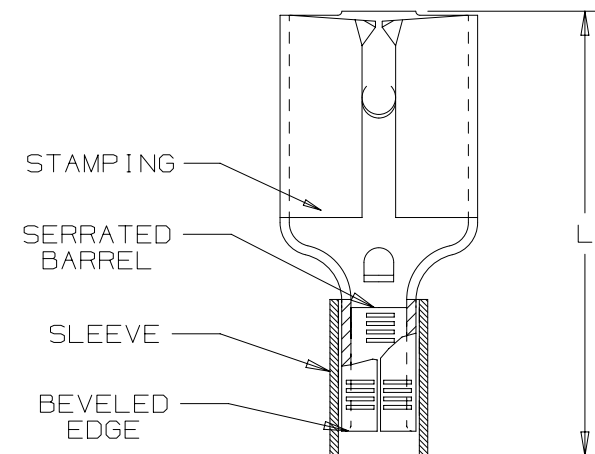

LISTED
20H3
E78522



CERTIFIED
LR31212



RECOGNIZED
E78522

TITLE STRONGHOLD FEMALE DISCONNECT (188 SERIES) NON-INSULATED, SLEEVED BARREL #22-14 AWG CUSTOMER DRAWING			
ITEM REVISION NAME 00123SHF/00			
DATASET FILE NAME 00123SHF/00			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		MATERIAL: SEE NOTES	
THIRD ANGLE PROJECTION		DRAWING NUMBER: SH41305	
DRAWN BY JHNU	DATE 02.07.18	CHK TMR	SCALE N.T.S.
REV		SIZE A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[ED14-188-L](#) [ED18-188-L](#) [ED14-188-Q](#) [ED18-188-Q](#)